

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [78229-2333](#)
Status: **Active**
Overview: GbX I-Trac™ Backplane Connector System
Description: GbX I-Trac™ Right Angle Header with Right Hold Down, Power Module, 2 Blades, 40 Amps, 3 Ganged Modules, Lead-Free

Documents:

[3D Model](#) [Application Specification AS-78231-007 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-78231-006 \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family Backplane Connectors
 Series [78229](#)
 Application Daughtercard
 Component Type Power Header
 Overview [GbX I-Trac™ Backplane Connector System](#)
 Product Name GbX I-Trac™
 Style N/A
 UPC 883906195663

Physical

Circuits (Loaded) 6
 Circuits (maximum) 6
 Circuits Detail 40 Amps (20/Split Blade). Power Module 1 Blade Length P1, 6.77mm; P2, 9.77mm. Power Module 3 Blade Length P1, 6.77mm; P2, 9.77mm

Color - Resin Black
 Durability (mating cycles max) 100
 First Mate / Last Break Yes
 Flammability 94V-0
 Guide to Mating Part No
 Keying to Mating Part None
 Material - Metal High Performance Alloy (HPA)
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 13.783g
 Number of Columns 1
 Number of Pairs 4
 Number of Rows 2
 Orientation Right Angle
 PC Tail Length 2.41mm
 PCB Locator Yes
 PCB Retention Yes
 PCB Thickness - Recommended 1.60mm
 Packaging Type Tray
 Pitch - Mating Interface 2.00mm, 7.40mm
 Pitch - Termination Interface 2.00mm, 7.40mm
 Polarized to PCB Yes
 Stackable No
 Surface Mount Compatible (SMC) Yes

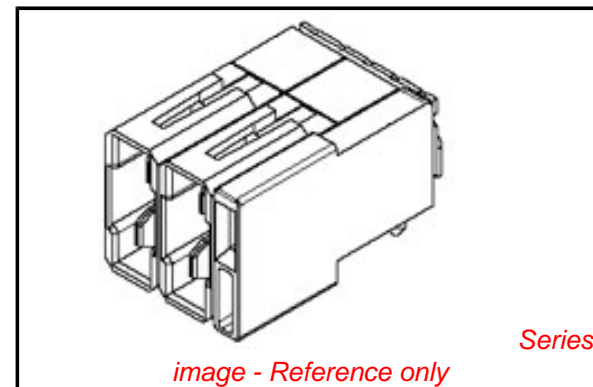


image - Reference only

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[78229Series](#)

Mates With

[78227](#) GbX I-Trac™ Vertical Receptacle, Power Module. [78230](#) GbX I-Trac™ Power Receptacle

Use With

[76020](#) GbX I-Trac™ Right Angle, 7 Row Receptacle Module

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Press-in Tool for Right Angle Power Receptacle and Header for 7-Row	0622018627

Temperature Range - Operating -20°C to +85°C
Termination Interface: Style Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact 40A
Data Rate 12.0 Gbps
Shield Type N/A
Shielded No
Voltage - Maximum 250V DC

Material Info

Reference - Drawing Numbers

Application Specification AS-78231-007
Product Specification PS-78231-006

This document was generated on 01/21/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Speed/Modular Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[2332816-1](#) [89006-1137LF](#) [650827-1](#) [65762-001LF](#) [73474-201LF](#) [74040-1346](#) [74075-0267](#) [88911-201LF](#) [1410191-1](#) [1410337-1](#) [1410368-3](#)
[1410964-2](#) [1410367-3](#) [1410971-4](#) [1467833-1](#) [2000877-1](#) [2000878-1](#) [2041314-1](#) [2065387-1](#) [2187307-1](#) [2187462-1](#) [2226278-6](#) [KA81-07](#)
[91290-101LF](#) [1934290-1](#) [2000875-1](#) [2065917-1](#) [2102736-2](#) [FSR-40](#) [2169868-2](#) [2226279-2](#) [22354-8](#) [437-5040-000](#) [5-1393565-0](#) [532449-3](#)
[532803-2](#) [34745-0001](#) [0760151403](#) [0736440217](#) [0758324203](#) [0761705038](#) [10131766-301LF](#) [1-1393708-5](#) [72388-0021LF](#) [73774-1000](#)
[740401386](#) [532939-1](#) [5-531355-3](#) [5532901-3](#) [85838-180LF](#)