

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0791077016](#)  
**Status:** **Active**  
**Overview:** Milli-Grid Connector System  
**Description:** 2.00mm Pitch Milli-Grid Receptacle, Vertical, Through Hole, Dual Row, 3.00mm Tail Length, 0.38µm Gold (Au) Selective Plating, 34 Circuits, Lead-Free

**Documents:**

[3D Model](#) [Application Specification 503940001-AS-000 \(PDF\)](#)  
[3D Model \(PDF\)](#) [Packaging Specification PK-70873-0180-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-79107-001 \(PDF\)](#)

**General**

Product Family	PCB Receptacles
Series	<a href="#">79107</a>
Application	Board-to-Board, Signal
Overview	<u>Milli-Grid Connector System</u>
Product Name	Milli-Grid
UPC	822348474615

**Physical**


Circuits (Loaded)	34
Circuits (maximum)	34
Color - Resin	Black
Durability (mating cycles max)	50
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.971/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.00mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Polarized to PCB	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	1.0A
Voltage - Maximum	125V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001

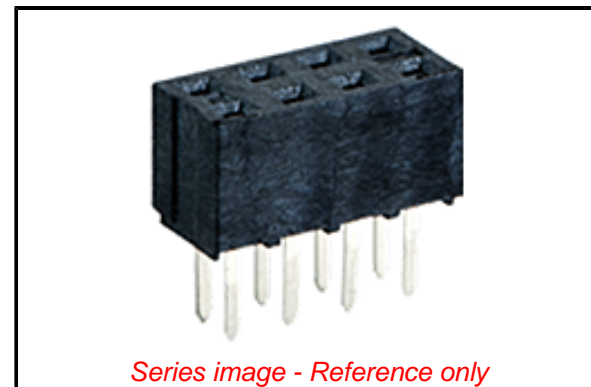

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Contained Per -  
D(2021)4569-DC (8  
July 2021)  
Dipentyl phthalate  
bis(2-(2-  
methoxyethoxy)ethyl)  
ether  
Benzo(ghi)perylene  
Octanoic acid,  
2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-  
pen  
Dodecamethylcyclhexasiloxane  
Decamethylcyclpentasiloxane  
Octamethylcycltetrasiloxane  
1,2-diethoxyethane  
Dibutyltin-dichloride  
1,3-Propanesultone  
C.I. Direct Black 38  
Ammonium-  
pentadecafluorooctanoate  
2,4-Di-tert-butyl-6-(5-  
chlorobenzotriazol-2-  
yl)p  
Disodium-octaborate  
Dibutylbis(pentane-2,4-  
dionato-O,O')tin  
2-(2H-Benzotriazol-2-  
yl)-4,6-  
ditertpentylphenol  
Terphenyl,  
hydrogenated  
1,2-  
Benzenedicarboxylic  
acid, dihexyl ester,  
bra  
diisohexyl phthalate  
1,2-  
Benzenedicarboxylic  
acid, dipentyl ester, br

**China RoHS**

Process Temperature max. C

260

### Material Info

### Reference - Drawing Numbers

Application Specification

503940001-AS-000

Packaging Specification

PK-70873-0180-001

Product Specification

PS-79107-001

Sales Drawing

SDA-79107-++++-001, SDA-79107-XXXX-001

n-pentyl-  
isopentylphthalate  
Boric acid  
Aluminosilicate  
Refractory Ceramic  
Fibres  
Zirconia  
Aluminosilicate  
Refractory Ceramic  
Fibr  
Nonadecafluorodecanoic  
acid (PFDA) and its  
sodiu  
Tris(4-nonylphenyl,  
branched and linear)  
phosphi  
Perfluorobutane  
sulfonic acid (PFBS)  
and its sal  
Fluoranthene  
Pyrene  
Dioctyltin dilaurate,  
stannane, dioctyl-,  
bis(co  
Perfluorononan-1-  
oic acid  
(2,2,3,3,4,4,5,5,6,6,7  
Methylhexahydrophthalic  
anhydride  
reaction mass of  
2-ethylhexyl 10-  
ethyl-4,4-dioct  
Perfluorohexane-1-  
sulphonic acid and its  
salts  
Lead chromate  
Tris(2-chloroethyl)  
phosphate  
Boric acid, disodium  
salt, hydrate  
Strontium-chromate  
1,2-  
Benzenedicarboxylic  
acid, di-C7-11-  
branched  
bis(2-methoxyethyl)  
ether  
1,2-  
Benzenedicarboxylic  
acid, bis(2-  
methoxyethyl  
1,2-Dimethoxyethane  
1,2-bis(2-  
methoxyethoxy)ethane  
Decabromodiphenylether  
Cadmium-oxide  
Cadmium-sulphide  
Lead  
Cadmium  
pyrochlore, antimony  
lead yellow  
Lead-dinitrate  
Lead oxide sulfate  
(Pb2O(SO4))  
Lead-titanium-trioxide

Pentalead-tetraoxide-  
sulphate  
Trilead-dioxide-  
phosphonate  
Tetralead-trioxide-  
sulphate  
Dioxobis(stearato)trilead  
Lead titanium  
zirconium oxide  
Cyanamide, lead(2+)  
salt (1:1)  
Cadmium Hydroxide  
Sulfurous Acid, Lead  
Salt, Dibasic  
Silicic acid (H<sub>2</sub>Si<sub>2</sub>O<sub>5</sub>),  
barium salt (1:1),  
lead-  
[Phthalato(2-)]dioxotrilead  
Fatty Acids, C16-18,  
Lead Salts  
N,N-  
Dimethylformamide  
Dicyclohexyl-  
phthalate  
Dihexyl-phthalate  
Phenanthrene  
Imidazolidine-2-thione

**Halogen-Free  
Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

**Search Parts in this Series**

[79107 Series](#)

**Mates With**

Milli-Grid Header [87758](#) , [87759](#) , [87760](#) ,  
[87831](#) , [87832](#) <br> Milli-Grid Low-Halogen  
Header [151117](#) , [151118](#) , [151119](#) , [151120](#)

This document was generated on 09/14/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)