


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0791091002](#)
Status: **Active**
Overview: [Milli-Grid Connector System](#)
Description: Milli-Grid Receptacle, Surface Mount, Vertical, Top/Bottom Entry, without Press-fit Plastic Pegs, without Cap, Tube, 0.38µm Gold (Au) Selective, 6 Circuits, Lead-Free

Documents:

| | |
|--|--|
| 3D Model | Application Specification 503940001-AS-000 (PDF) |
| Drawing (PDF) | Packaging Specification PK-70873-0217-001 (PDF) |
| 3D Model (PDF) | Packaging Specification PK-70873-0259-001 (PDF) |
| Product Specification PS-79107-001 (PDF) | RoHS Certificate of Compliance (PDF) |

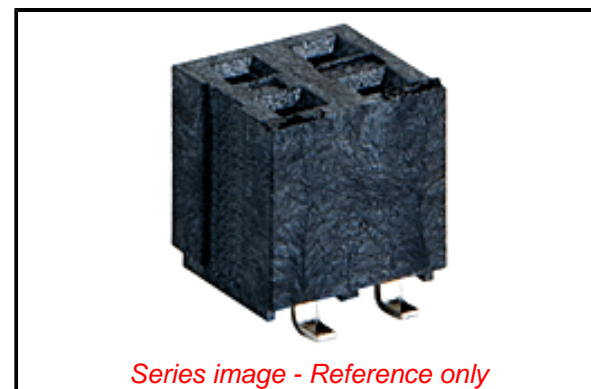

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|---|
| Product Family | PCB Receptacles |
| Series | 79109 |
| Application | Board-to-Board, Signal |
| Overview | Milli-Grid Connector System |
| Product Name | Milli-Grid |
| UPC | 822348490226 |

Physical

| | |
|--------------------------------|--------------------------------|
| Circuits (Loaded) | 6 |
| Circuits (maximum) | 6 |
| Color - Resin | Black |
| Durability (mating cycles max) | 50 |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Lock to Mating Part | None |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 0.164/g |
| Number of Rows | 2 |
| Orientation | Vertical |
| PCB Locator | No |
| PCB Retention | None |
| Packaging Type | Tube |
| Pitch - Mating Interface | 2.00mm |
| Plating min - Mating | 0.381µm |
| Plating min - Termination | 1.905µm |
| Polarized to PCB | No |
| Temperature Range - Operating | -55° to +105°C |
| Termination Interface: Style | Surface Mount |

Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 1.0A |
| Voltage - Maximum | 125V |

Solder Process Data

| | |
|--|--------|
| Duration at Max. Process Temperature (seconds) | 010 |
| Lead-free Process Capability | REFLOW |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 260 |

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

| | |
|-----------------|---------------|
| China ROHS | Green Image |
| ELV | Compliant |
| RoHS Phthalates | Not Contained |

Search Parts in this Series

[79109 Series](#)

Mates With

Milli-Grid Header [87833](#) , [87832](#) , [87831](#) ,
[87758](#) , [87759](#) , [87760](#)
 Milli-Grid Low-
Halogen Header [151117](#) , [151118](#) , [151119](#) ,
[151120](#)

Material Info

Reference - Drawing Numbers

Application Specification

503940001-AS-000

Packaging Specification

PK-70873-0217-001, PK-70873-0259-001

Product Specification

PS-79107-001

Sales Drawing

SDA-79109-XXXX-001

This document was generated on 09/14/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)