

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0791098401](#)  
**Status:** **Active**  
**Overview:** [Milli-Grid Connector System](#)  
**Description:** Milli-Grid Receptacle, Surface Mount, Vertical, Top/Bottom Entry, without Press-fit Plastic Pegs, with Cap, Embossed Tape on Reel, 0.38µm Gold (Au) Selective, 4 Circuits, Lead-Free

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                 | <a href="#">Application Specification 503940001-AS-000 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                           | <a href="#">Packaging Specification PK-70873-0259-001 (PDF)</a>  |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">RoHS Certificate of Compliance (PDF)</a>             |
| <a href="#">Product Specification PS-79107-001 (PDF)</a> |  |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |   |
|----------------|---|
| Product Family | PCB Receptacles                             |
| Series         | <a href="#">79109</a>                       |
| Application    | Board-to-Board, Signal                      |
| Overview       | <a href="#">Milli-Grid Connector System</a> |
| Product Name   | Milli-Grid                                  |
| UPC            | 822348492251                                |

**Physical**


|                                |                                |
|--------------------------------|--------------------------------|
| Circuits (Loaded)              | 4                              |
| Circuits (maximum)             | 4                              |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 50                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Lock to Mating Part            | None                           |
| Material - Metal               | Phosphor Bronze                |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 0.110/g                        |
| Number of Rows                 | 2                              |
| Orientation                    | Vertical                       |
| PCB Locator                    | No                             |
| PCB Retention                  | None                           |
| Packaging Type                 | Embossed Tape on Reel          |
| Pitch - Mating Interface       | 2.00mm                         |
| Plating min - Mating           | 0.381µm                        |
| Plating min - Termination      | 1.905µm                        |
| Polarized to PCB               | No                             |
| Temperature Range - Operating  | -55° to +105°C                 |
| Termination Interface: Style   | Surface Mount                  |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 1.0A |
| Voltage - Maximum             | 125V |

**Solder Process Data**

|  |        |
|--|--------|
| Duration at Max. Process Temperature (seconds) | 010    |
| Lead-free Process Capability                   | REFLOW |
| Max. Cycles at Max. Process Temperature        | 001    |

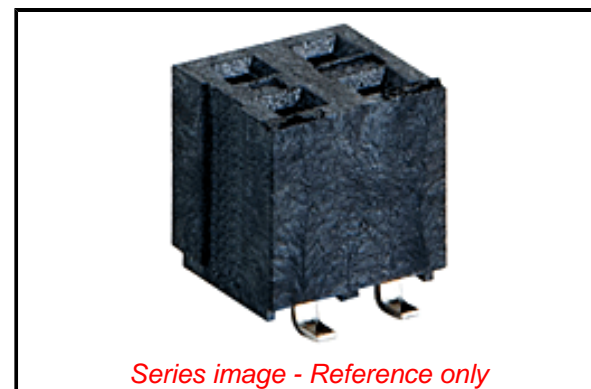

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

|                 |               |
|-----------------|---------------|
| China ROHS      | Green Image   |
| ELV             | Not Relevant  |
| RoHS Phthalates | Not Contained |

**Search Parts in this Series**

[79109 Series](#)

**Mates With**

Milli-Grid Header [87833](#) , [87832](#) , [87831](#) ,  
[87758](#) , [87759](#) , [87760](#) <br> Milli-Grid Low-  
Halogen Header [151117](#) , [151118](#) , [151119](#) ,  
[151120](#)

Process Temperature max. C 260

**Material Info**

**Reference - Drawing Numbers**

|                           |                    |
|---------------------------|--------------------|
| Application Specification | 503940001-AS-000   |
| Packaging Specification   | PK-70873-0259-001  |
| Product Specification     | PS-79107-001       |
| Sales Drawing             | SDA-79109-XXXX-001 |

This document was generated on 12/10/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)