

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0874381243**

Status: **Active**

Overview: Pico-SPOX Wire-to-Board Connector System

Description: 1.50mm Pitch, Pico-SPOX PCB Header, Single Row, Right-Angle, Surface Mount, Tin over Nickel Plating, Friction Lock, 12 Circuits, Tape and Reel, Beige

Documents:

[Drawing \(PDF\)](#)

[3D Model](#)

[3D Model \(PDF\)](#)

[Product Specification 874371001-PS-001 \(PDF\)](#)

[Product Specification PS-87437-001-001 \(PDF\)](#)

[Application Specification 874370000-AS-000 \(PDF\)](#)

[Packaging Specification SPK-87438-001-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179


General

Product Family PCB Headers
Series [87438](#)
Application Signal, Wire-to-Board
Overview [Pico-SPOX Wire-to-Board Connector System](#)
Product Name Pico-SPOX
UPC 822348439072

Physical

Breakaway No
Circuits (Loaded) 12
Circuits (maximum) 12
Color - Resin Beige
Durability (mating cycles max) 10
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part Yes
Lock to Mating Part Yes
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 0.613/g
Number of Rows 1
Orientation Right Angle
PCB Locator No
PCB Retention None
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface 1.50mm
Plating min - Mating 2.540µm
Plating min - Termination 2.540µm
Polarized to Mating Part Yes
Polarized to PCB No
Shrouded Fully
Stackable No
Temperature Range - Operating -55° to +105°C
Termination Interface: Style Surface Mount

Electrical

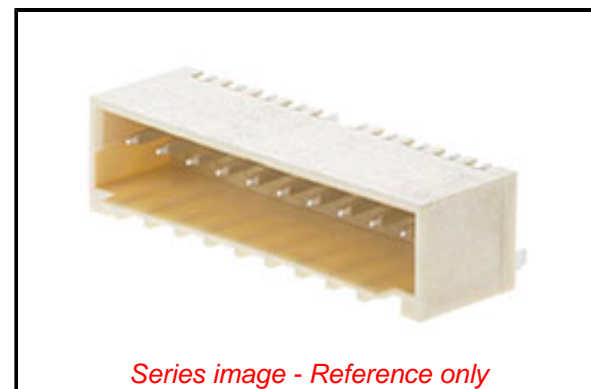

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[87438](#) Series

Mates With

[87439](#) Pico-SPOX Wire-to-Board Housing

Current - Maximum per Contact	2.5A
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

Application Specification	874370000-AS-000
Packaging Specification	SPK-87438-001-001
Product Specification	874371001-PS-001, PS-87437-001-001
Sales Drawing	874380231-SD-000

This document was generated on 01/03/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)