


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0877159105](#)  
**Status:** **Active**  
**Overview:** [PCIe PCI-X Connectors](#)  
**Description:** 1.00mm Pitch, PCI Express Connector, 64 Circuits, Nylon 4/6 Glass-filled, Black Housing, Phosphor Bronze, 0.38µm Gold Solder-tail, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-87715-207-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary TS-87715-207-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-87715-200-001 (PDF)</a>	

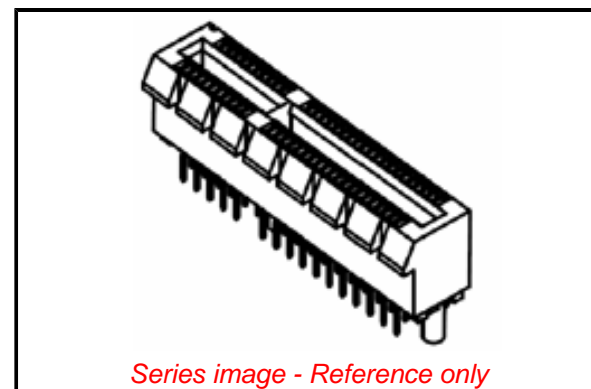

**Agency Certification**

CSA	LR19980
UL	E29179

**General**

Product Family	Edge Card Connectors
Series	<a href="#">87715</a>
Comments	PCI 4 lanes
Component Type	Edgecard to PCB
Data Rate	8.0 Gbps
Edge Card Thickness	1.57mm
Electrical Model	Yes
High Power Bay (30.0A or more)	No
Orientation	Vertical
Overview	<a href="#">PCIe PCI-X Connectors</a>
Product Name	PCI Express
Standard Based	PCIe
UPC	822348685479

**Physical**

(p)ower-(s)ignal Configuration	64s - 0p
Circuit Size Range	1-64 Circuits
Circuits (Loaded)	64
Circuits (maximum)	64
Durability (mating cycles max)	50
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Keying to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	3.866/g
PC Tail Length	3.00mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.40mm
Packaging Type	Tray
Pitch - Mating Interface	1.00mm
Pitch - Termination Interface	1.00mm
Plating min - Mating	0.381µm
Polarized to Mating Part	Yes
Temperature Range - Operating	-55° to +85°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	1.1A
-------------------------------	------

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[87715 Series](#)

**Mates With**

PCI Express Card

Voltage - Maximum 50V AC (RMS)/DC

**Solder Process Data**

Lead-free Process Capability WAVE  
Process Temperature max. C 245

**Material Info**

**Reference - Drawing Numbers**

Electrical Model Document EE-87715-004-001, EE-87715-011-001,  
EE-87715-012-001, EE-87715-013-001,  
EE-87715-014-001  
Packaging Specification PK-87715-207-001  
Product Specification PS-87715-200-001  
S-Parameter Model SP-87715-004-001, SP-87715-011-001,  
SP-87715-012-001, SP-87715-013-001,  
SP-87715-014-001  
Sales Drawing SD-87715-207-001  
Test Summary TS-87715-207-001

This document was generated on 08/19/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [PCI Express/PCI Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[UEX220-6U](#) [10039755-10110TLF](#) [1-1871239-2](#) [2170560-2](#) [10125756-980000LF](#) [EB220-3U](#) [WD2M144WB2R300](#) [10061913-120PLF](#)  
[GPCP146400111HR](#) [GPCP442628110HR](#) [GPCP446200120HR](#) [GPCP245400111HR](#) [10082378-10000TLF](#) [87715-9256](#) [MDT580M03001](#)  
[0877159107](#) [10018783-11000MLF](#) [10018783-11101TLF](#) [10108777-10000ALF](#) [10141523-111T0LF](#) [10145445-10003MLF](#)  
[PSASF2130311TR](#) [PSASF3130411TR](#) [PSASF3130131TR](#) [7-1734774-7](#) [3-1761465-1](#) [10039755-10111TLF](#) [10039755-10112TLF](#) [10018783-](#)  
[10211TLF](#) [10018784-10211TLF](#) [10018784-10212TLF](#) [1761465-2](#) [1871058-1](#) [5-1761465-4](#) [10018783-10200MLF](#) [10018783-10213TLF](#)  
[10018784-10210TLF](#) [10018784-11113TLF](#) [10025026-10001TLF](#) [5145154-8](#) [1871058-4](#) [2041119-2](#) [10018783-10212TLF](#) [10018784-](#)  
[10102TLF](#) [10018783-11200TLF](#) [10123371-001TRLF](#) [10018784-10110TLF](#) [6-1734774-7](#) [6-1734774-9](#) [1775838-2](#)