


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0877581016](#)  
**Status:** **Active**  
**Overview:** [Milli-Grid Connector System](#)  
**Description:** 2.00mm Pitch Milli-Grid Header, Through Hole, Vertical, 10 Circuits, 0.38µm Gold (Au) Selective Plating, Pocket Tray Packaging, Lead-Free

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                     | <a href="#">Application Specification 503940001-AS-000 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                               | <a href="#">Packaging Specification PK-89990-487-001 (PDF)</a>   |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">Test Summary 877610000-TS-000 (PDF)</a>              |
| <a href="#">Product Specification PS-87761-100-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>             |

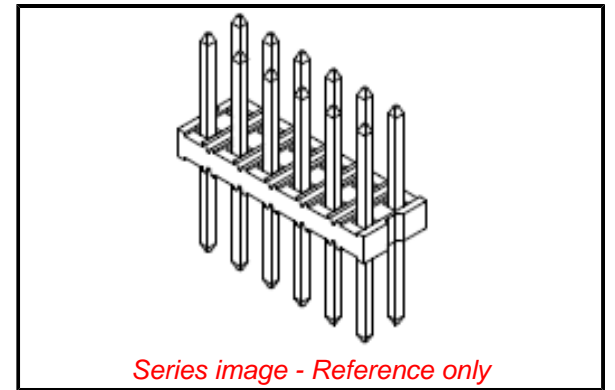

**Agency Certification**

UL E29179

**General**

|                |   |
|----------------|---|
| Product Family | PCB Headers                                 |
| Series         | <a href="#">87758</a>                       |
| Application    | Board-to-Board, Signal                      |
| Overview       | <a href="#">Milli-Grid Connector System</a> |
| Product Name   | Milli-Grid                                  |
| UPC            | 822348273546                                |

**Physical**

|                                |                 |
|--------------------------------|-----------------|
| Breakaway                      | Yes             |
| Circuits (Loaded)              | 10              |
| Circuits (maximum)             | 10              |
| Color - Resin                  | Black           |
| Durability (mating cycles max) | 100             |
| First Mate / Last Break        | No              |
| Flammability                   | 94V-0           |
| Glow-Wire Capable              | No              |
| Guide to Mating Part           | No              |
| Keying to Mating Part          | None            |
| Lock to Mating Part            | None            |
| Mated Height                   | 4.00mm          |
| Material - Metal               | Phosphor Bronze |
| Material - Plating Mating      | Gold            |
| Material - Plating Termination | Tin             |
| Material - Resin               | Nylon           |
| Net Weight                     | 0.253/g         |
| Number of Rows                 | 2               |
| Orientation                    | Vertical        |
| PC Tail Length                 | 2.60mm          |
| PCB Locator                    | No              |
| PCB Retention                  | None            |
| PCB Thickness - Recommended    | 1.60mm          |
| Packaging Type                 | Tray            |
| Pitch - Mating Interface       | 2.00mm          |
| Pitch - Termination Interface  | 2.00mm          |
| Plating min - Mating           | 0.381µm         |
| Polarized to Mating Part       | No              |
| Polarized to PCB               | No              |
| Shrouded                       | No              |
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | Yes             |
| Temperature Range - Operating  | -55° to +105°C  |

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[87758](#) Series

**Mates With**

Milli-Grid Vertical Through Hole Receptacle [79107](#) , [78787](#) , Milli-Grid Flex-to-Board Vertical Receptacle [79108](#) , Milli-Grid Vertical Surface Mount Receptacle [79109](#) , [78788](#) , Milli-Grid Top Entry Surface Mount Receptacle [87381](#) , Milli-Grid Crimp Housing [51110](#)

Termination Interface: Style Through Hole

**Electrical**

Current - Maximum per Contact 2.0A  
Voltage - Maximum 125V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 003  
Lead-free Process Capability WAVE  
Max. Cycles at Max. Process Temperature 001  
Process Temperature max. C 250

**Material Info**

**Reference - Drawing Numbers**

Application Specification 503940001-AS-000  
Packaging Specification PK-89990-487-001  
Product Specification PS-87761-100-001  
Sales Drawing SD-87758-107-001  
Test Summary 877610000-TS-000

This document was generated on 09/13/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)