


# CABLE SPECIFICATION

**CONDUCTOR:**  
 MATERIAL: TINED COPPER  
 SECTION: 24AWG  
**INSULATION:**  
 COMPOUND: PE  
 DIAMETER: 0.99mm  
 PAIRS: COLOR CODED SINGLES  
 TWISTED INTO PAIRS.  
**JACKET:**  
 COMPOUND: TPE  
 COLOR: TEAL  
 DIAMETER: 5.58mm  
 TEMPERATURE RATING:  
 -50°C TO +75°C  
 VOLTAGE RATING MAX: 300V

TABLE OF LENGTH TOLERANCES		
OVER	UP TO AND INCLUDING	TOLERANCE (+)
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	+2% OF LENGTH

REVISION A	TRANSFERRED TO ECTR NEW PN ADDED
REVISION A1	ADDED NEW PN
REVISION A2	WIRING UPDATED

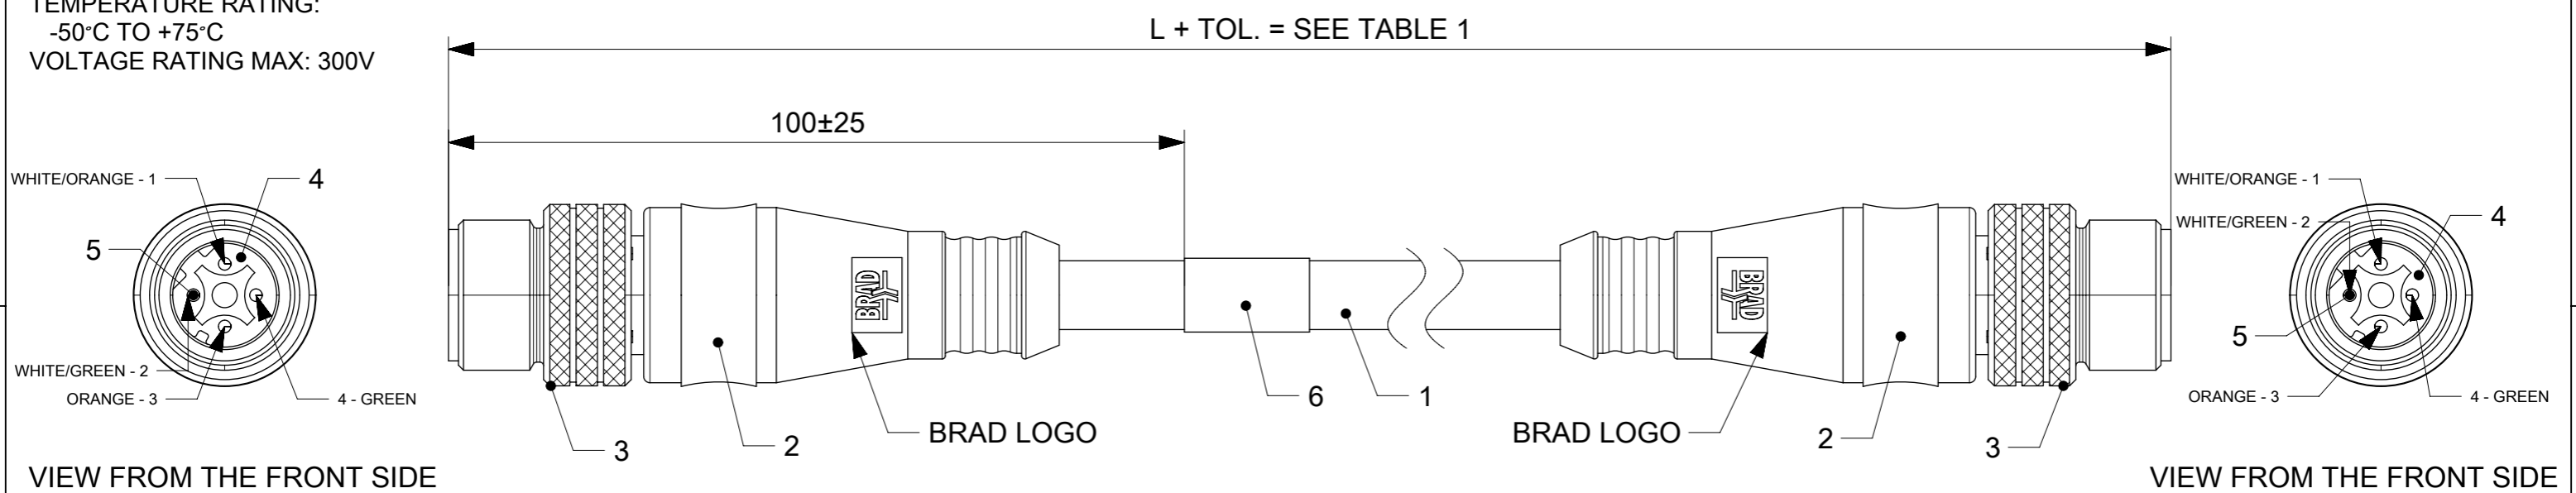

**NOTES:**  
 1. BRAD LOGO - ONLY IN ONE SIDE ON THE OVERMOULD.

## BILL OF MATERIALS

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	VINYL	-
5	8	CONTACT MALE	COPPER ALLOY	GOLD OVER NICKEL
4	2	INSERT D-CODE 4 POLE	ELASTOLLAN	-
3	2	COUPLING NUT M12	BRASS	TEFLON OVER NICKEL
2	-	OVERMOULD MATERIAL	TPE	BLACK
1	-	ETHERNET CABLE CAT5E	TPE	TEAL

TABLE 1

MOLEX PN	ENGINEERING No	L [mm]	MOLEX PN	ENGINEERING No	L [mm]
1300480095	E11A06004M010	1000	1300480108	E11A06004M180	18000
1300480096	E11A06004M020	2000	1300480109	E11A06004M200	20000
1300480097	E11A06004M030	3000	1300480110	E11A06004M240	24000
1300480098	E11A06004M040	4000	1300480111	E11A06004M300	30000
1300480099	E11A06004M050	5000	1300480112	E11A06004M500	50000
1300480100	E11A06004M060	6000	1300480251	E11A06004M003	300
1300480101	E11A06004M070	7000	1300480252	E11A06004M006	600
1300480102	E11A06004M080	8000	1300480253	E11A06004M250	25000
1300480103	E11A06004M090	9000	1300480315	E11A06004M380	38000
1300480104	E11A06004M100	10000	1300480316	E11A06004M230	23000
1300480105	E11A06004M120	12000	1300480317	E11A06004M270	27000
1300480106	E11A06004M140	14000	1300480318	E11A06004M340	34000
1300480107	E11A06004M150	15000	1300480319	E11A06004M420	42000

MOLEX PN	ENGINEERING No	L [mm]
1300480322	E11A06004M570	57000
1300480323	E11A06004M650	65000
1300480324	E11A06004M760	76000
1300480325	E11A06004M800	80000
1300480326	E11A06004M850	85000

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 109023 DRWN: DSTACHOWIAK CHK'D: APPR: MIWASIECZKO	2016/09/14 2016/10/24	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °	DIMENSION UNITS: MM SCALE: 2:1		
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	DRWN BY: MMATLA DATE: 2016/06/27	DRWN BY: MIWASIECZKO DATE: 2016/07/13		PRODUCT CUSTOMER DRAWING
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWING SIZE: A3 THIRD ANGLE PROJECTION	SERIES: 130048 MATERIAL NUMBER: SEE TABLE 1 CUSTOMER: GENERAL MARKET		
	A2	REV:	DOCUMENT NUMBER: 1300480095 DOC TYPE: PSD DOC PART: 00P SHEET NUMBER: 1 OF 1		

RELEASE STATUS	P1	RELEASE DATE	24.10.2016	06:30:03
----------------	----	--------------	------------	----------

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Gate Drivers](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[00053P0231](#) [8967380000](#) [56956](#) [CR7E-30DB-3.96E\(72\)](#) [57.404.7355.5](#) [LT4936](#) [57.904.0755.0](#) [5803-0901](#) [58410](#) [5882900001](#) [00600P0005](#)  
[00-9050-LRPP](#) [00-9090-RDPP](#) [5951900000](#) [01-1003W-10/32-15](#) [LTLA6E-1S-WH-RC-FN12VXCR1](#) [0131700000](#) [00-2240](#) [LTP70N06](#)  
[LVP640](#) [0158-624-00](#) [5J0-1000LG-SIL](#) [020017-13](#) [LY1D-2-5S-AC120](#) [LY2-0-US-AC120](#) [LY2-US-AC240](#) [LY3-UA-DC24](#) [00-5150](#)  
[00576P0020](#) [00600P0010](#) [LZNQ2M-US-DC5](#) [LZNQ2-US-DC12](#) [LZP40N10](#) [00-8196-RDPP](#) [00-8274-RDPP](#) [00-8275-RDNP](#) [00-8609-](#)  
[RDPP](#) [00-8722-RDPP](#) [00-8728-WHPP](#) [00-8869-RDPP](#) [00-9051-RDPP](#) [00-9091-LRPP](#) [00-9291-RDPP](#) [0207100000](#) [0207400000](#) [60100564](#)  
[01312](#) [0134220000](#) [6035](#) [M15730061](#)