

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1000570228](#)  
**Status:** **Active**  
**Overview:** [Temp-Flex Flat Ribbon Cable Solutions](#)  
**Description:** Temp-Flex High-Performance Flat-Ribbon Cable, 10 Circuits, 1.27mm Pitch, 28 AWG, Silver Plated Copper Alloy, UL 20424, 19/40 Stranded Extruded FEP, Natural

**Documents:**

[Drawing \(PDF\)](#) [Brochure \(PDF\)](#)  
[Datasheet \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

|                         |   |
|-------------------------|---|
| Product Family          | Cable   |
| Series                  | <a href="#">100057</a>                                |
| Crimp Quality Equipment | Yes   |
| Overview                | <a href="#">Temp-Flex Flat Ribbon Cable Solutions</a> |
| Product Name            | Temp-Flex   |
| UPC                     | 889056602778  |

**Physical**

|                               |  |
|-------------------------------|--|
| Cable Length                  | 150 ft/spool, 20 ft min length                         |
| Circuits (Loaded)             | 10   |
| Color - Cable Jacket          | Natural  |
| Insulation                    | FEP  |
| Material - Outer Jacket       | FEP  |
| Material - Plating Mating     | Silver   |
| Net Weight                    | 13.790/g   |
| Packaging Type                | Spool  |
| Pitch - Mating Interface      | 1.27mm   |
| Temperature Range - Operating | -65° to +200°C   |
| Wire Size AWG                 | 28   |
| Wire/Cable Type               | 19/40 Stranded, High-Performance Flat-Ribbon, UL 20424 |

**Electrical**


|                               |         |
|-------------------------------|---------|
| Current - Maximum per Contact | 1.5A    |
| Voltage - Maximum             | 300V AC |

**Material Info**

|                    |                  |
|--------------------|------------------|
| Engineering Number | F28H19S-10-050-N |
|--------------------|------------------|

**Reference - Drawing Numbers**

|               |                        |
|---------------|------------------------|
| Sales Drawing | 1000572819ALLOYNAT-000 |
|---------------|------------------------|

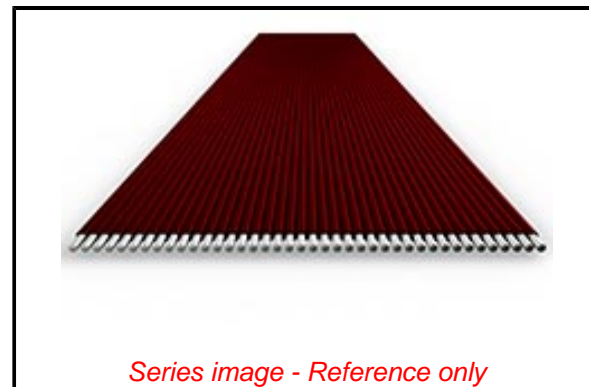

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[100057 Series](#)

**Use With**

Molex Picoflex

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Flat Cables](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[F28-A25G](#) [F28-A34G](#) [F28-A36G](#) [FST-23A-15](#) [AYT1510-US](#) [171-37G](#) [C336514-500](#) [902220736002000](#) [902220736006000](#) [28100-0614](#)  
[9L28010-008-H300](#) [9L28014-008-H300](#) [F28-A24G](#) [F28-A60G](#) [25WDY00002](#) [28100-0571](#) [28100-0602](#) [28100-0650](#) [28100-0664](#) [336506-](#)  
[100SF](#) [336512-300](#) [336537-CUT-LENGTH](#) [3447/10-100](#) [362514100MSF](#) [40WDY00005](#) [AYT51163](#) [336506-300](#) [C3302/16](#) [C374910](#)  
[3625/24100M](#) [3749/10-100](#) [375630](#) [3-971111-6](#) [1-1437356-3](#) [812504](#) [20WDY00001](#) [5-1437214-8](#) [3355/15](#) [40WBY00007](#) [3609/12](#)  
[5111196336](#) [607.5689.087](#) [607.5689.091](#) [3801/04](#) [8124/04](#) [3801/12](#) [3625/22100MSF](#) [902220736005000](#) [902220736004000](#) [C3811/10-100](#)