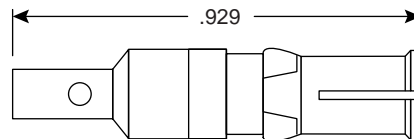
152-FMX1067  
Plug152-FMX3067  
Receptacle**Dimensions (In.)****Specifications:**

- Type: 50Ω D-Sub coaxial
- Insulation resistance: 1000GΩ
- Contact resistance: 6mΩ
- Operating voltage: 500V @ 50Hz
- Withstand voltage: 750V @ 50Hz
- Current rating: 1.5A max.
- Frequency range: 0~2GHz
- Insertion cycles: > 300
- Temperature range: -65°~+165°C
- Outer conductor: copper alloy (152-FMX1067),  
copper beryllium (152-FMX3067)
- Retaining ring: copper beryllium
- Insulation: PTFE
- Center conductor plating: 2μm nickel over 1.3μm gold
- Outer conductor plating: 3μm nickel over .8μm gold (mating area),  
2μm nickel over .3 μm gold (termination area)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Contacts](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[D02-22-26S-10000](#) [8656352067LF](#) [131A15029X](#) [132J22039X](#) [132A11029X](#) [132A11049X](#) [132A12059X](#) [1757912-1](#) [188582-000](#)  
[162A11889X](#) [1757913-1](#) [212558-1](#) [030-1955-000](#) [053744-0098](#) [053744-0099](#) [053745-0105](#) [053745-0111](#) [601098N003](#) [D-610-10CS2962](#)  
[86303057NLF](#) [131A11019X](#) [162A11819X](#) [40-9854MP](#) [1-208778-5](#) [FC120N2](#) [MC7526D/AA](#) [MC8122D/AA](#) [FC4010D-15](#) [FC4006D](#)  
[121A05329A](#) [164C16669X](#) [86566620064LF](#) [131A13019X](#) [DLS3XS5AK40X](#) [09692825723](#) [VS-BU-KX-50-RG58](#) [030-1954-000](#)  
[L17DM53744207](#) [L17RRD1M11400](#) [030-1952-000](#) [030-1953-000](#) [030-1953-030](#) [132C11039X](#) [132J15019X](#) [132C15019X](#) [132A10039X](#)  
[131A10029X](#) [8638PSC2006LF](#) [8656453067LF](#) [86566520064LF](#)