Fused Single-Mode WDM (980/1550nm)
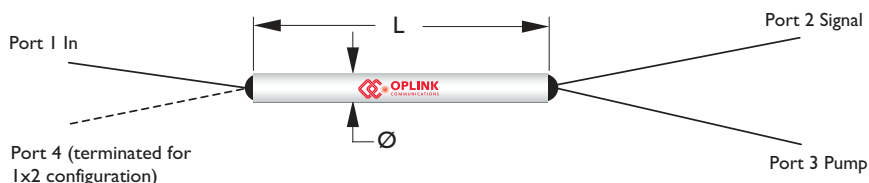
Product Description

Oplink's 980/1550nm fused single-mode wavelength division multiplexers are manufactured using the proven fused biconical taper technology and Oplink's stringent quality procedures. With low insertion loss and flat passband, this device is ideal for combining pump (980nm) and signal light at 1550nm in optical fiber amplifiers.

Oplink can provide customized designs to meet specialized feature applications. Also, Oplink offers modular assemblies that integrate other components to form a full function module or subsystem.

Port 1 In

L

Ø

Port 4 (terminated for 1x2 configuration)

Port 2 Signal

Port 3 Pump

Features

◈ Ultra Low Insertion Loss
◈ Ultra High Isolation
◈ Low Polarization Sensitivity
◈ High Directivity
◈ High Stable & Reliable
◈ Bidirectional

Performance Specification

SWDM59 Series	Premium	Grade A	Grade B	Unit
Operating Wavelength	970 - 990nm / 1535 - 1565nm			
Insertion Loss (970 - 990nm / 1535 - 1565nm)	< 0.1	< 0.2	< 0.3	dB
Isolation	> 20			dB
Polarization Dependent Loss	< 0.1			dB
Directivity	> 55			dB
Maximum Power Handling	500			mW
Operating Temperature	- 10 to + 70			°C
Storage Temperature	- 40 to + 85			°C
Fiber Type	HI1060 FLEX & HI980			
Package Dimensions **	P1: 250µm bare fiber P2: 900µm loose tube	(ø)3.0 x (L)54 (ø)3.0 x (L)60		mm

Note:
* Values are referenced without connector loss.
** The mechanical tolerance should be +/-0.2 mm on all package dimensions unless otherwise custom specified.

Applications

◈ Telecommunications
◈ CATV
◈ Subscriber Loop
◈ Local Area Networks
◈ Fiberoptic Sensors

OPLINK

your DESIGN & OMS partner

Ordering Information

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

SWDM [5] [9] [ ] [S] [ ] [0] [0] [ ] [ ] [ ] [ ]

Wavelength
1550/980nm= 59

Type
Standard= S

Configuration
1x2 = 1
2x2 = 2

Grade
Premium Grade = P
A Grade = A
B Grade = B

Package & Fiber Type
P1+ HI1060 = 16
P1+ HI980 = 19
P2+ HI1060 = 26
P2+ HI980 = 29

Fiber Length
0.5 Meter = H
1.0 Meter = 1 *
1.5 Meters = 5
2.0 Meters = 2

Connector Type
None = 1
FC/PC = 2
FC/SPC = 3
FC/APC = 4
SC/PC = 5
SC/SPC = 6
SC/APC = 7
ST = 8
LC = 9
MU = A
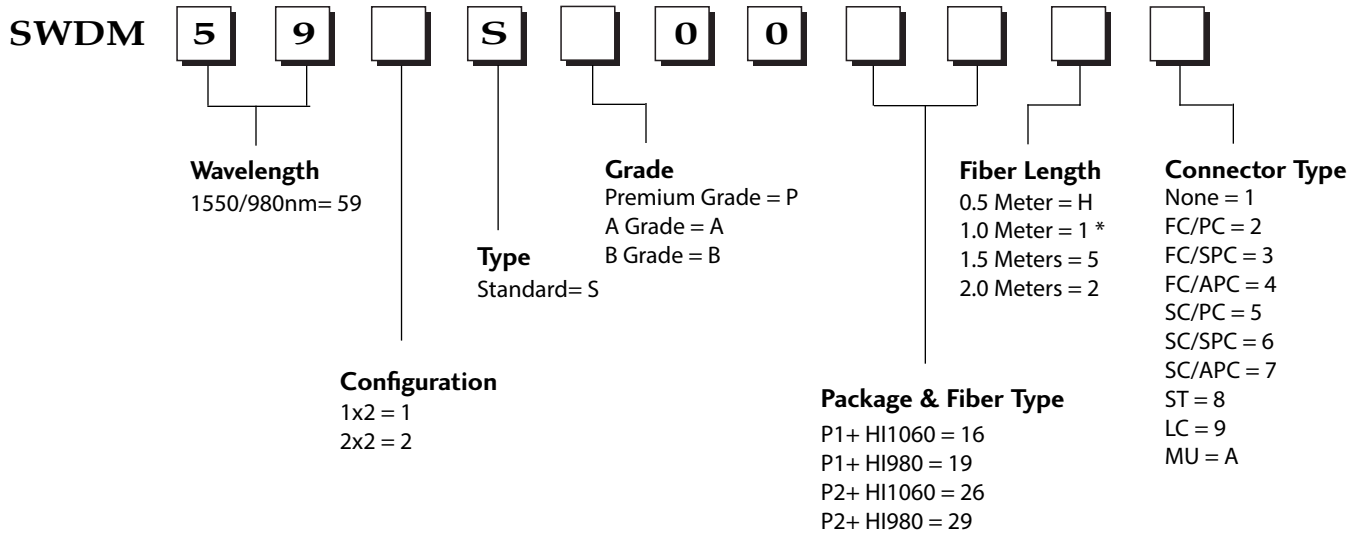
Notes :
* 1 meter is standard. The lead time
for special fiber length will be longer.

S0168 - R01. 20100630

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fibre Optic Switches *category:*

Click to view products by Molex *manufacturer:*

Other Similar products are found below :

ITMA080520E2111G ITMA0805ECMD111 ITMSE05ECO81111G MIOCG5ECO031111 MIOCG5ECO041111 MMFC8150P001211 OFMS06400002315 OFMS1200ES05111 OFMS12MIE02111 OFMS2200ES05111 OFMS22DU8M15211 OFMS22DUES15111 OFMS22MIE02111 OIDS15500003111 OIDSG1550S01111 OISA155000D3111 OISS1550PS03111 OISSG1550L01111 PIPA08E20200111G PIPDD20ECO51111G PIPDD20ECO61111G PMBC1450P001211 PMIH14400001211 PMTC155010P1211 SWDM531SP001111 SWDM541SP001111 SWFC5150P001111 TCIHG1550S11111 UTMA080520E2111G UTMSE05ECO11111G WDIH15140SF1111 WDIH15140SF3111 WDIH15980SF1111 WDIH15980SF3011 WTIH1514S012111 WTIH1598S012111