




EURO 88E2H – 6,3mm

Article: **88E2H3060D1**

ELECTROMECHANICAL RELAY INTERFACE
 – 1 CO contact (SPDT)
 – Model: 60VUC
 – 60VDC Coil – Screw connection system
 Only 6,3mm thickness



GENERAL INFORMATION

Series	88E2H
Item	88E2H3060D1
Weight/Piece	29.8 g
Color	Grey
Q.ty p.pck.	10
Q.ty p. box	-

GENERAL DATA

Dimensions

Width mm(in.)	6.3 (0.25)
Length mm(in.)	76 (2.99)
Height mm(in.)	88.3 (3.48)
Mounting type	DIN rail Omega TH35

Ambient conditions

Operating temperature	-40°C...+70°C
Storage temperature	-40°C...+85°C

INPUT data

Rated Voltage	60VDC
Coil rated voltage	60VDC
Rated power consumption	210mW
Operating Range at 23°C	45,0...90,0VDC

OUTPUT data

Contact type	1CO contact (SPDT)
Contacts material	AgSnO ₂
Rated current	6A
Rated voltage	250V
Status display	Green LED
Max. breaking capacity, AC1	1500VA
Min. breaking capacity, AC1	1W



Max. switching voltage	250VAC / 30VDC
Max resistive load AC	6A-277VAC
Min. switching current	100mA
Rated data	
Protection degree (IP)	IP20
Overvoltage category	III
Pollution degree	3
Dielectric strength Coil-contact/circuit	4kV - 60s
Dielectric strength between open contacts	1kV - 60s
Mechanical endurance	1 x 10 ⁷ OPS
Connecting capacity	2,5mm ² /AWG 26-14
Max tightening torque	0,5 Nm / 4.5 lb-in
Stripping length	7mm

APPROVALS





File E356484



LISTED
IND. CONT. EQ.
4ZJ7



TECHNICAL DRAWINGS

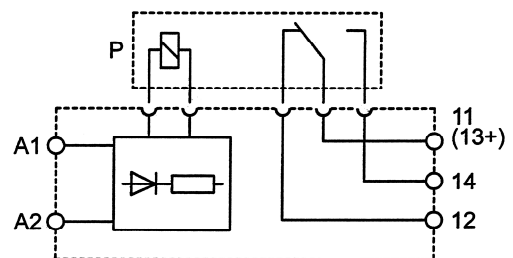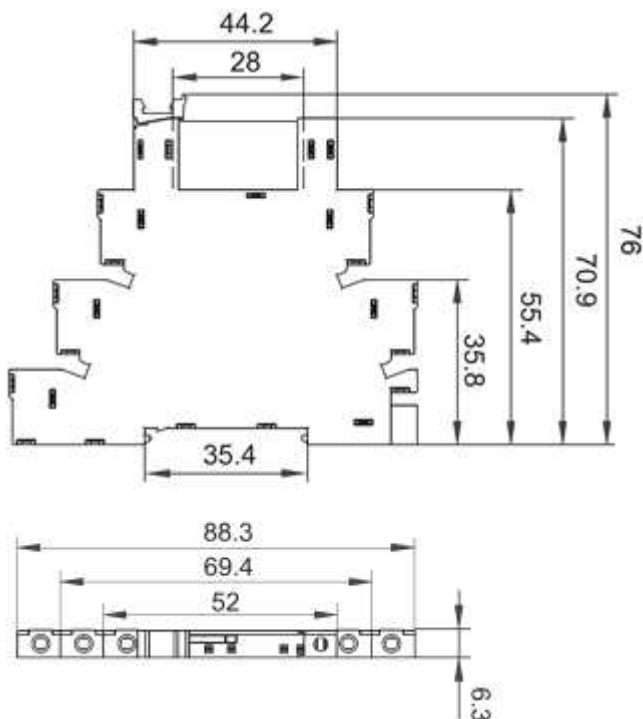



ACCESSORIES

Marking

Item	Description
88D2H50	Marking tags (6 x 10 mm) white (<i>special marking on request</i>)

Spares

Item	Description
88RED060H1Z0	Spare relay: Slim relay – 1CO (SPDT) – 60VDC_EMR
88B2H3060U1	Spare socket: Empty socket 6,3mm – input 48-60VUC – screw

Additional items

Item	Description
88D2H00	End plate - grey
88D2H20-20BL	Plug-in insulated Jumper bar 20 poles – black – pitch 6,3mm
88D2H20-20BK	Plug-in insulated Jumper bar 20 poles – blue – pitch 6,3mm
88D2H20-20RD	Plug-in insulated Jumper bar 20 poles – red – pitch 6,3mm
43442	EURO STOP - End bracket width 9
43444	EURO STOP - End bracket width 6
43447	EURO STOP - Snap-on end bracket width 6
43449	EURO STOP - End bracket cover profile carrier
43449-C	EURO STOP - Cover profile - Length 100cm

Terminal rail systems

Item	Description
43910	Steel Omega rail TH35/7,5mm - 2mt length
43910/F	Slotted steel Omega rail TH35/7,5mm - 2mt length
43911	Steel Omega rail TH35/15mm - 2mt length
43911/F	Slotted steel Omega rail TH35/15mm - 2mt length
43028	Angled support bracket

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [MORSETTITALIA](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)