

■ PRODUCT CHARACTERISTICS


V _{DSS}	-30V
R _{DS(on)} Typ(@ V _{GS} =-4.5V)	14mΩ
R _{DS(on)} Typ(@ V _{GS} =-10V)	9.5mΩ
I _D	-20A

■ APPLICATIONS

- PWM applications
- Load switch
- Power management

■ FEATURES

- High power and current handling capability
- Led free product is acquired
- Surface mount package

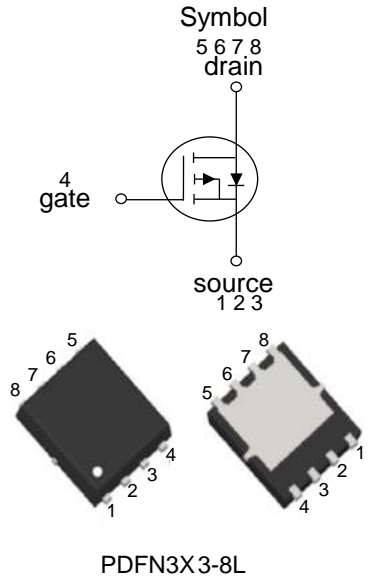

■ ORDER INFORMATION

Order codes		Package	Packing
Halogen-free	Halogen		
N/A	MOT3712J	PDFN3X3-8L	5000pieces/Reel

■ ABSOLUTE MAXIMUM RATINGS(T_C=25°C , unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-source voltage	V _{DSS}	-30	V
Gate-source voltage	V _{GSS}	±20	V
Drain current	I _D	-20	A
Pulsed drain current	I _{DM}	-80	A
Power dissipation	P _D	35	W
Junction temperature	T _J	+150	°C
Storage temperature	T _{STG}	-55~ +150	°C

■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	BV _{DSS}	V _{GS} =0V, I _{DS} =-250uA	-30	-	-	V
Drain-source leakage current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V	-	-	-1	μA
Gate-source leakage current	I _{GSS}	V _{GS} = ±20V, V _{DS} =0V	-	-	100	nA
On characteristics						
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _{DS} =-250uA	-1.2	-	-2.5	V
On-state characteristics	R _{DS(ON)}	V _{GS} =-4.5V, I _D =-15A	-	14	18	mΩ
		V _{GS} =-10V, I _D =-15A	-	9.5	12	mΩ
Forward transconductance	g _{FS}	V _{DS} =-5V, I _D =-15A	10	-	-	S
Dynamic characteristics						
Input capacitance	C _{iss}	V _{GS} =0V, V _{DS} =-25V f=1MHz	-	2130	-	pF
Out capacitance	C _{oss}		-	302	-	pF
Reverse transfer capacitance	C _{rss}		-	227	-	pF
Switching characteristics						
Total gate charge	Q _g	V _{GS} =-10V, V _{DS} =-15V I _D =-20A	-	10	-	nC
Gate-source charge	Q _{gs}		-	2	-	nC
Gate-drain charge	Q _{gd}		-	2.7	-	nC
Turn-on delay time	t _{d(on)}	V _{DD} =-15V, I _D =-15A R _G =1 V _{GS} =-10V	-	12	-	nS
Turn-on rise time	t _r		-	10	-	nS
Turn-off delay time	t _{d(off)}		-	25	-	nS
Turn-off fall time	t _f		-	13	-	nS
Source-drain diode ratings and characteristics						
Continuous diode forward current	I _{SD}		-	-	-20	A
Diode forward current	V _{SD}	V _{GS} =0V, I _{SD} =-20A	-	-	-1.2	V

■ TYPICAL CHARACTERISTICS

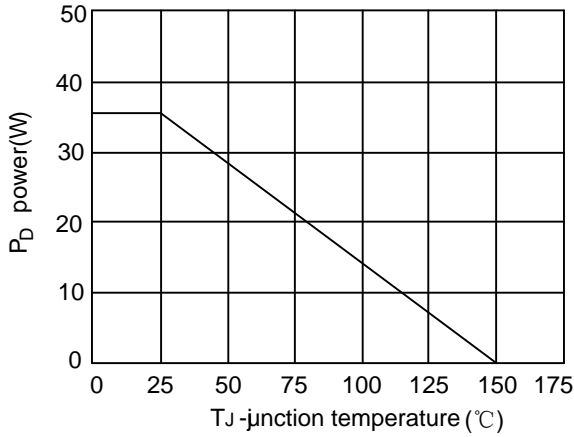


Fig.1 power dissipation

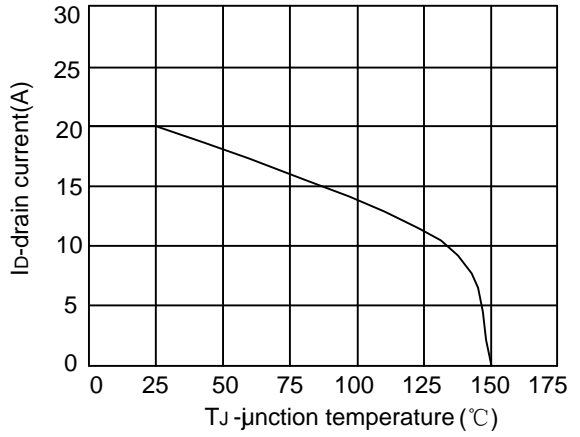


Fig.2 current vs junction temperature

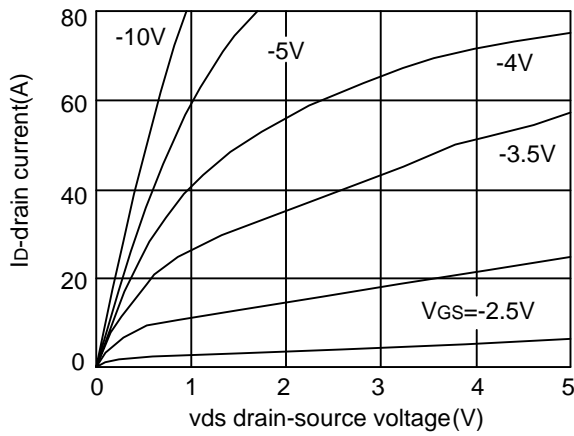


Fig.3 output characteristics

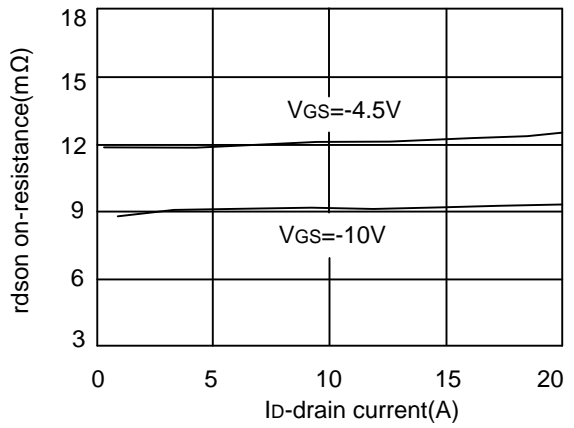


Fig.4 drain-source on-resistance

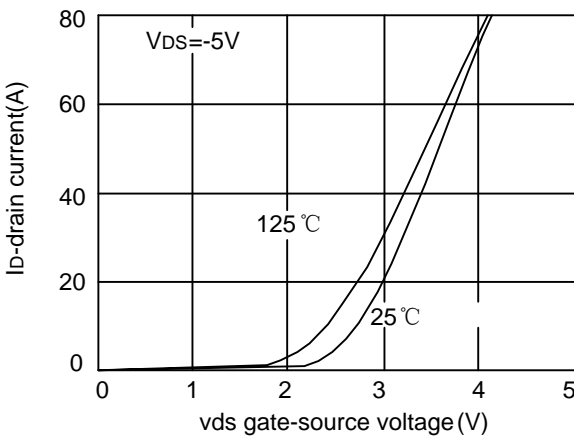


Fig.5 transfer characteristics

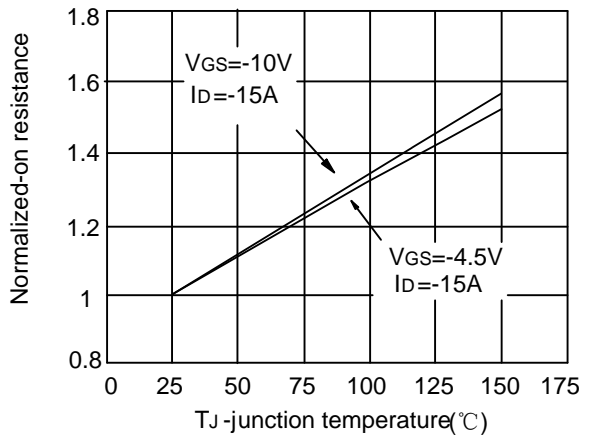


Fig.6 drain-source on-resistance

■ TYPICAL CHARACTERISTICS(Cont.)

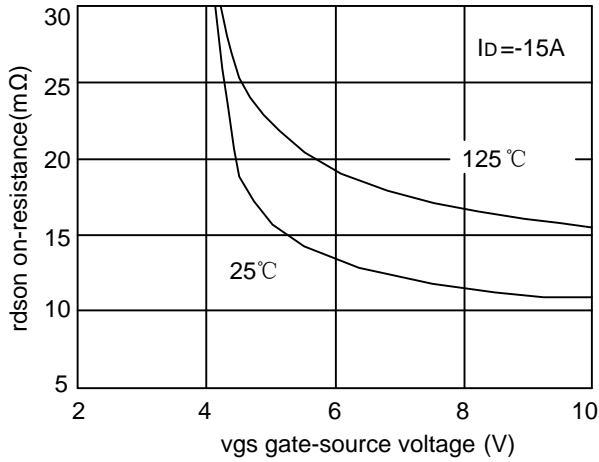


Fig.7 rdson vs vgs

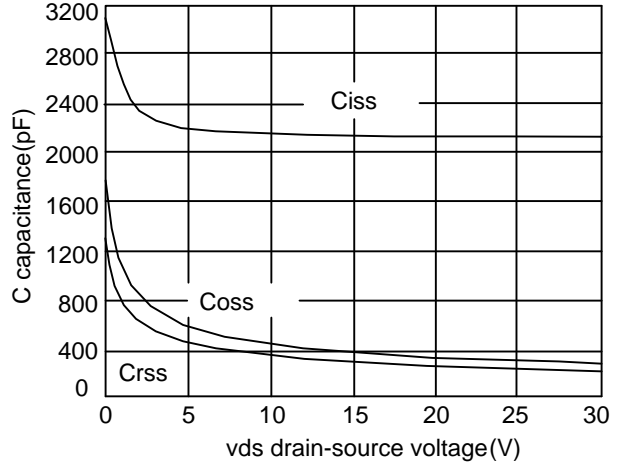


Fig.8 capacitance vs vds

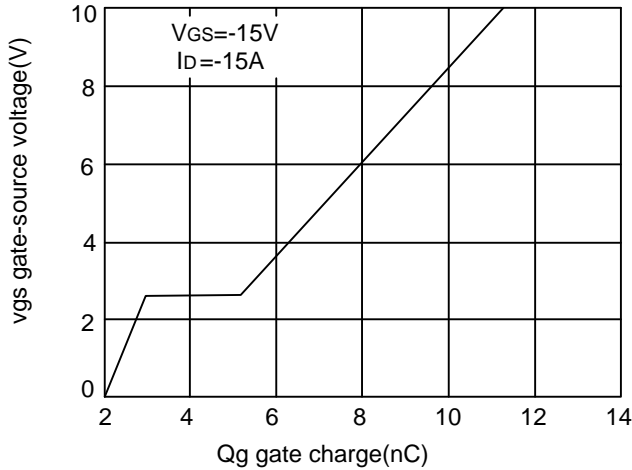


Fig.9 gate charge

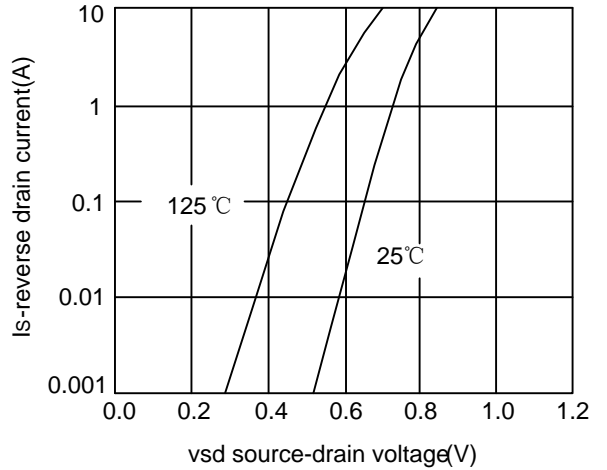


Fig.10 source-drain diode forward

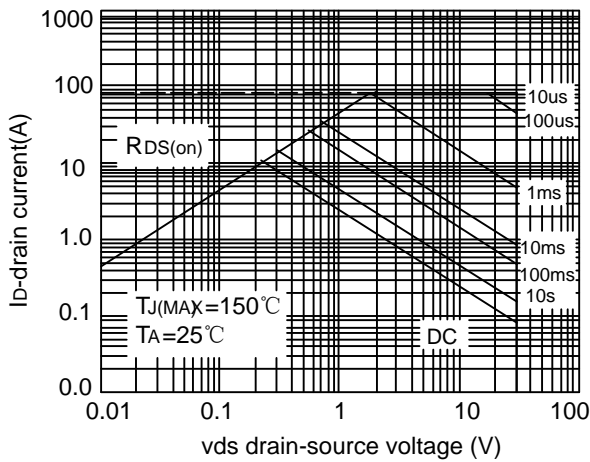


Fig.11 safe operation area





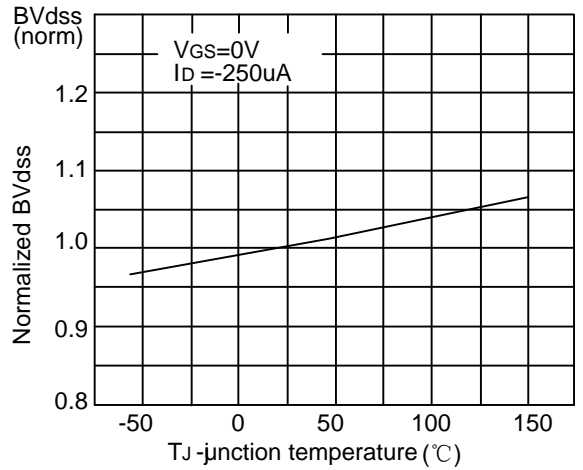


Fig.12 BVdss vs junction temperature

■ PDFN3X3-8L PACKAGE MECHANICAL DATA

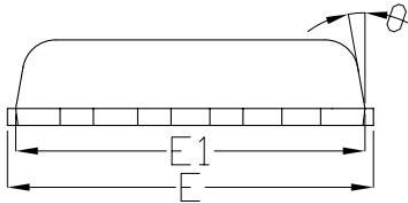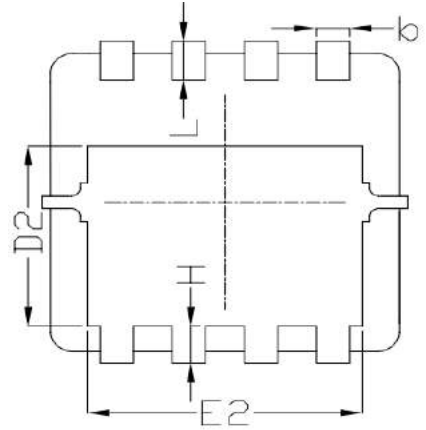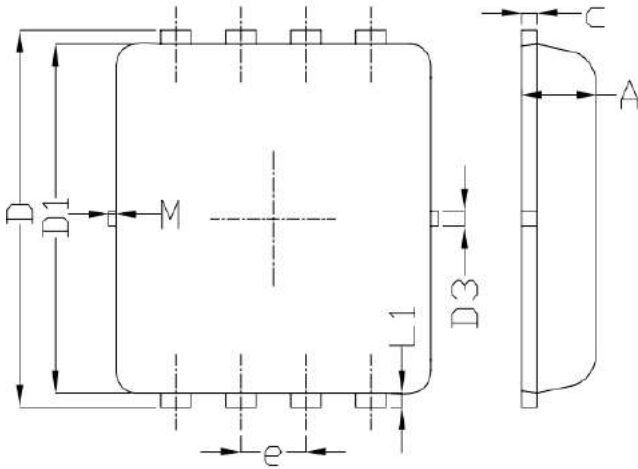

Land Pattern
(Only for Reference)

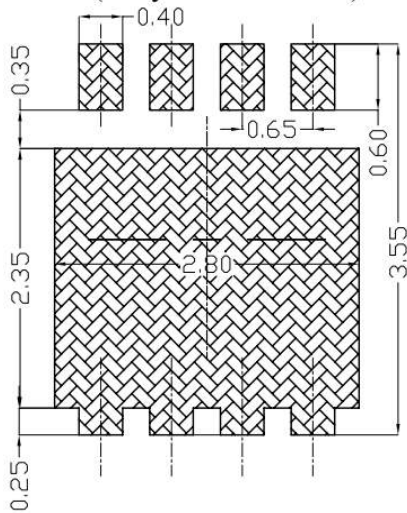

SYMBOL	DIMENSIONAL REQMTS		
	MIN	NOM	MAX
A	0.70	0.75	0.80
b	0.25	0.30	0.35
c	0.10	0.15	0.25
D	3.25	3.35	3.45
D1	3.00	3.10	3.20
D2	1.78	1.88	1.98
D3	---	0.13	---
E	3.20	3.30	3.40
E1	3.00	3.15	3.20
E2	2.39	2.49	2.59
e	0.65BSC		
H	0.30	0.39	0.50
L	0.30	0.40	0.50
L1	---	0.13	---
θ	---	10°	12°
M	*	*	0.15
* Not specified			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [MOT](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#)
[WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTGR](#) [DMNH15H110SK3-13](#)
[SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#) [IPA60R230P6](#)