

■ PRODUCT CHARACTERISTICS



V _{DSS}	40V
R _{DS(on)} Typ(@V _{GS} =4.5V)	9.5mΩ
R _{DS(on)} Typ(@V _{GS} =10V)	6.5mΩ
I _D	60A

■ APPLICATIONS

DC/DC converter
Ideal for high-frequency switching
and synchronous rectification

■ FEATURES

Very low on-resistance R_{DS(on)}
Good stability and uniformity with high E_{AS}
Pb-free lead plating

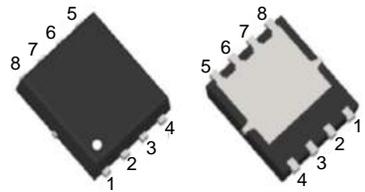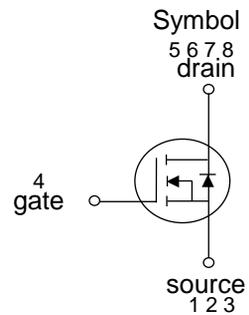

PDFN5X6-8L

■ ORDER INFORMATION

Order codes		Package	Packing
Halogen-free	Halogen		
N/A	MOT4180G	PDFN5X6-8L	5000pieces/Reel

■ ABSOLUTE MAXIMUM RATINGS(T_C=25°C, unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-source voltage	V _{DSS}	40	V
Gate-source voltage	V _{GSS}	±20	V
Drain current	I _D	60	A
Pulsed drain current	I _{DM}	200	A
Avalanche energy single pulsed	E _{AS}	400	mJ
Power dissipation	P _D	40	W
Junction temperature	T _J	+150	°C
Storage temperature	T _{STG}	-55~ +175	°C

■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	40	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =40V, V _{GS} =	-	-	1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
On characteristics						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1	-	2.5	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =10V, I _D =20A	-	6.5	8.0	mΩ
		V _{GS} =4.5V, I _D =20A	-	9.5	13	mΩ
Forward Transconductance	g _{FS}	V _{DS} =10V, I _D =20A	10	-	-	S
Dynamic characteristics						
Input Capacitance	C _{iss}	V _{DS} =20V, V _{GS} =0V, F=1.0MHz	-	1800	-	pF
Output Capacitance	C _{oss}		-	280	-	pF
Reverse Transfer Capacitance	C _{rss}		-	190	-	pF
Switching characteristics						
Turn-on Delay Time	t _{d(on)}	V _{DD} =20V, I _D =2A, R _L =1Ω V _{GS} =10V, R _G =3Ω	-	6.4	-	nS
Turn-on Rise Time	t _r		-	17.2	-	nS
Turn-Off Delay Time	t _{d(off)}		-	29.6	-	nS
Turn-Off Fall Time	t _f		-	16.8	-	nS
Total Gate Charge	Q _g	V _{DS} =20V, I _D =20A, V _{GS} =10V	-	29	-	nC
Gate-Source Charge	Q _{gs}		-	4.5	-	nC
Gate-Drain Charge	Q _{gd}		-	6.4	-	nC
Drain-source diode characteristics						
Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =10A	-	-	1.2	V
Diode Forward Current	I _S		-	-	60	A
Reverse Recovery Time	t _{rr}	T _J = 25°C, I _F = 20A di/dt = 100A/μs	-	29	-	nS
Reverse Recovery Charge	Q _{rr}		-	26	-	nS

■ TYPICAL CHARACTERISTICS

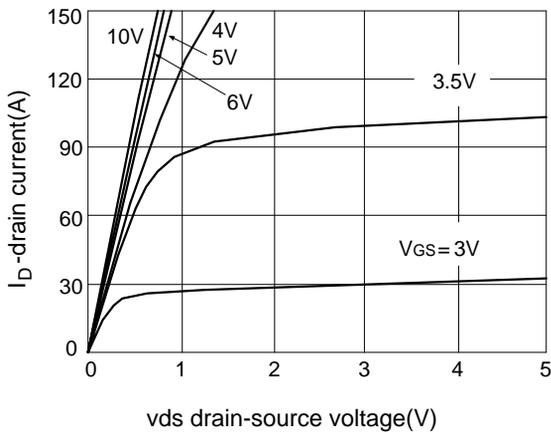


Fig.1 output characteristics

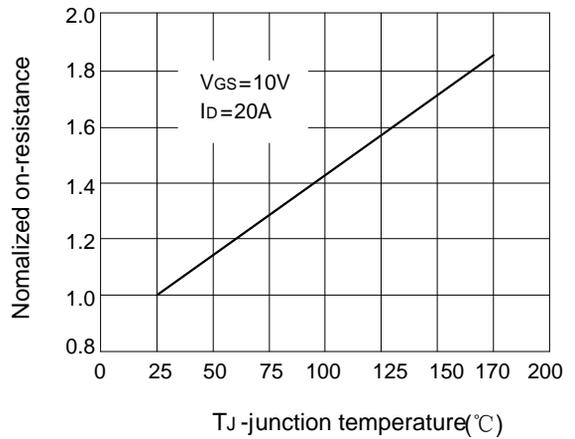


Fig.2 $r_{ds(on)}$ -junction temperature

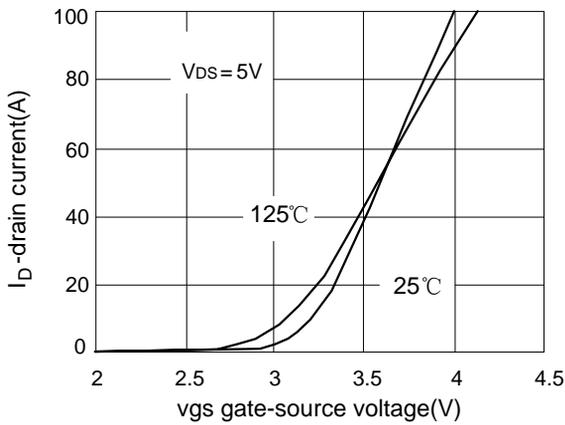


Fig.3 transfer characteristics

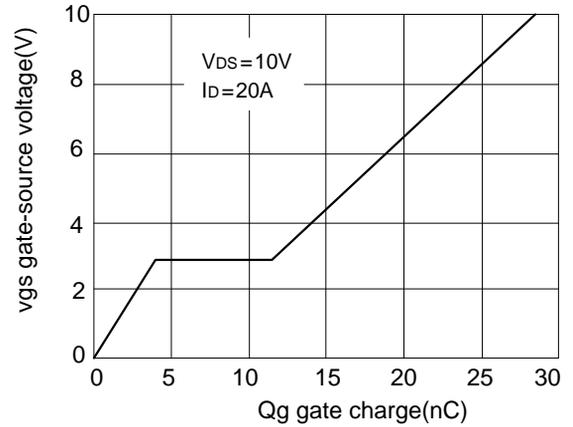


Fig.4 gate charge

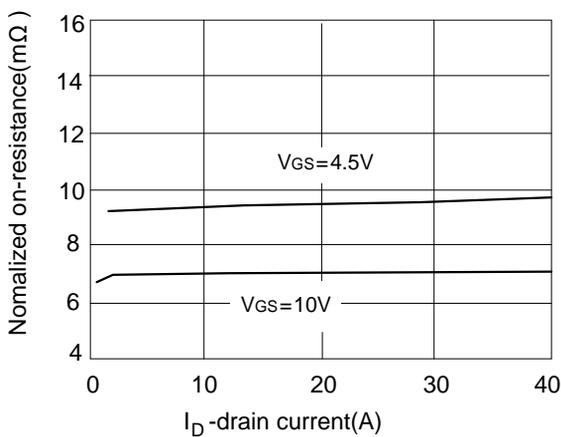


Fig.5 $r_{ds(on)}$ -drain current

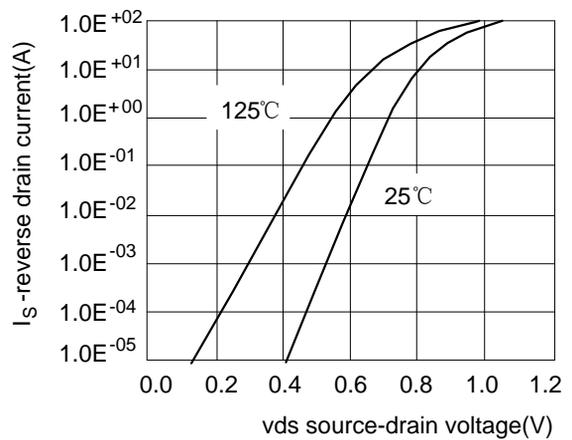


Fig.6 source-drain diode forward

■ TYPICAL CHARACTERISTICS(Cont.)

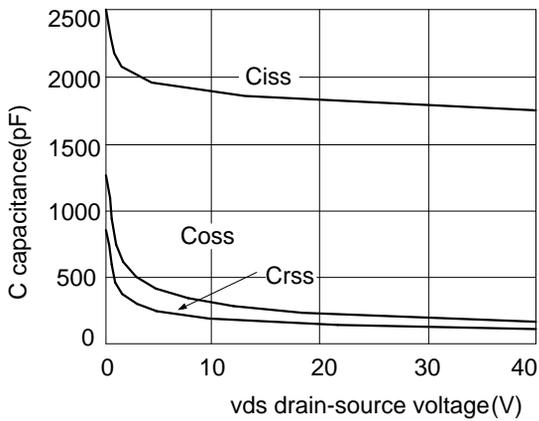


Fig.7 capacitance vs vds

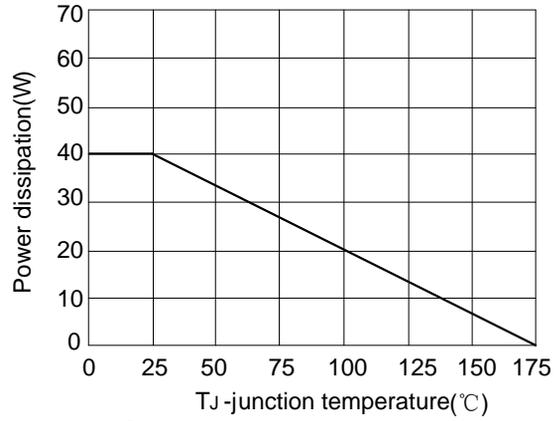


Fig.8 power de-rating

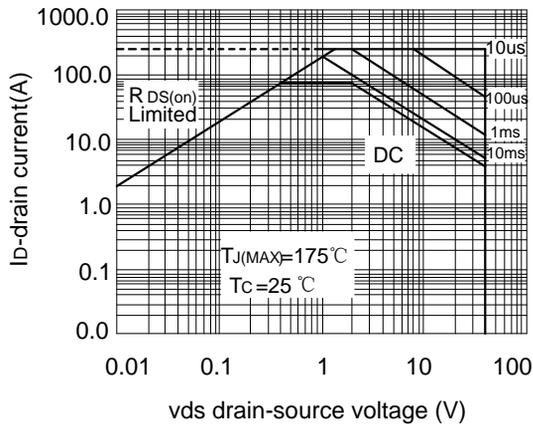


Fig.9 safe operation area

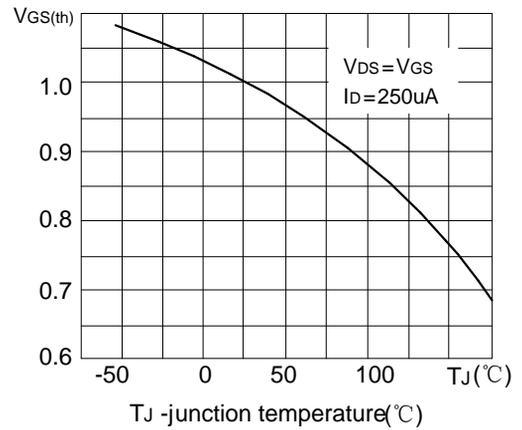


Fig.10 VGS(th) vs junction temperature



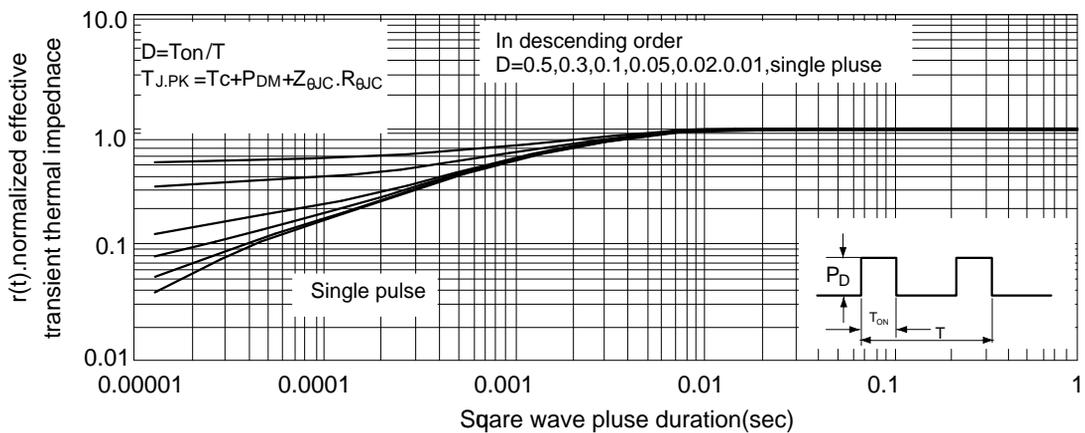


Fig.11 normalized maximum transient thermal impedance

■ PDFN5X6-8L PACEAGE MECHANICAL DATA

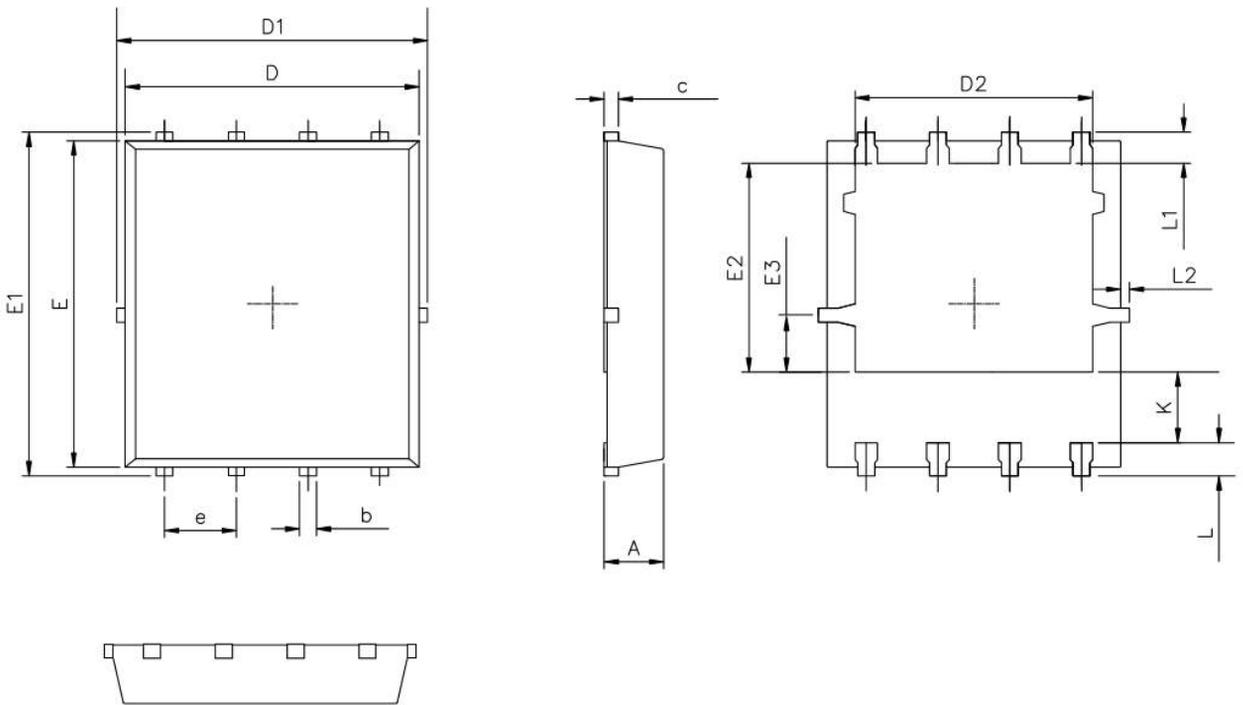

RECOMMENDED LAND PATTERN

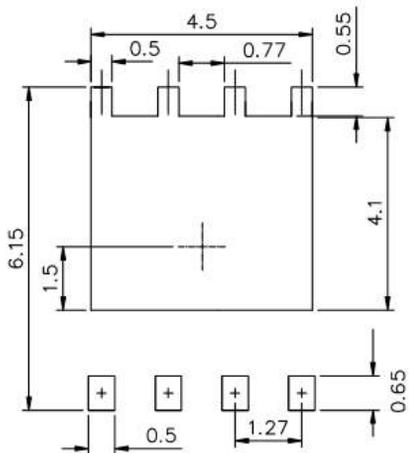

UNIT:mm

	MIN	NOM	MAX
A	0.90	1.00	1.10
b	0.25	0.35	0.50
c	0.10	0.20	0.30
D	4.80	5.00	5.30
D1	4.90	5.10	5.50
D2	3.92	4.02	4.20
E	5.65	5.75	5.85
E1	5.90	6.05	6.20
E2	3.325	3.525	3.775
E3	0.80	0.90	1.00
e		1.27	
L	0.40	0.55	0.70
L1		0.65	
L2	0.00		0.15
K	1.00	1.30	1.50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [MOT](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#) [SLF10N65ABV2](#)
[BSO203SP](#) [BSO211P](#) [IPA60R230P6](#) [IPA60R460CE](#)