

■ PRODUCT CHARACTERISTICS


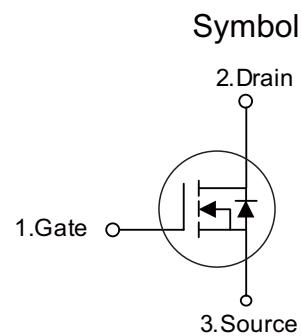
VDSS	650V
R _{DS(on)typ(@V_{GS} = 10 V)}	2.2Ω
Q _{G@typ}	15nC
I _D	5A

■ APPLICATIONS

- * High frequency switching mode power supply
- * Electronic ballast
- * LED power supplies

■ FEATURES

- * High Switching Speed



■ ORDER INFORMATION

Order codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT5N65D	TO-252	2500 pieces /Reel
N/A	MOT5N65C	TO-251	70 pieces/Tube

■ ABSOLUTE MAXIMUM RATINGS (T = 25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V _{DSS}	650	V
Gate-Source Voltage		V _{GSS}	±30	V
Drain Current	Continuous	I _D	5	A
	Pulsed (Note 2)	I _{DM}	10	A
Avalanche Energy	Single Pulsed (Note 3)	E _{AS}	112	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	3.2	V/ns
Power Dissipation	TO-251/252	P _D	54	W
Junction Temperature		T _J	+150	°C
Storage Temperature		T _{STG}	-55 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. L = 10mH, I_{AS} = 4.73A, V_{DD} = 50V, R_G = 25 Ω Starting T_J = 25°C

4. I_{SD} ≤ 7.0A, di/dt ≤ 200A/μs, V_{DD} ≤ BV_{DSS}, Starting T_J = 25°C


■ ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Off characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_D=250\mu\text{A}$	650	-	-	V
Drain-Source Leakage Current	I_{DSS}	$\text{V}_{\text{DS}}=650\text{V}, \text{V}_{\text{GS}}=0\text{V}$	-	-	10	μA
Gate-Source Leakage Current	Forward	$\text{V}_{\text{GS}}=30\text{V}, \text{V}_{\text{DS}}=0\text{V}$	-	-	100	nA
	Reverse		$\text{V}_{\text{GS}}=-30\text{V}, \text{V}_{\text{DS}}=0\text{V}$	-	-	-100
On characteristics						
Gate Threshold Voltage	$\text{V}_{\text{GS(TH)}}$	$\text{V}_{\text{DS}}=\text{V}_{\text{GS}}, \text{I}_D=250\mu\text{A}$	2.0	-	4.0	V
Static Drain-Source On-State Resistance	$\text{R}_{\text{DS(ON)}}$	$\text{V}_{\text{GS}}=10\text{V}, \text{I}_D=2.5\text{A}$	-	2.2	2.6	Ω
Dynamic characteristics						
Input Capacitance	C_{ISS}	$\text{V}_{\text{GS}}=0\text{V}, \text{V}_{\text{DS}}=25\text{V}, f=1.0\text{ MHz}$	-	623	-	pF
Output Capacitance	C_{OSS}		-	62	-	pF
Reverse Transfer Capacitance	C_{RSS}		-	2.9	-	pF
Switching characteristics						
Total Gate Charge (Note 1)	Q_G	$\text{V}_{\text{DS}}=100\text{V}, \text{V}_{\text{GS}}=10\text{V}, \text{I}_D=2.0\text{A}$ $\text{I}_G=1\text{mA}$ (Note 1, 2)	-	15	-	nC
Gate-source Charge	Q_{GS}		-	5.6	-	nC
Gate-Drain Charge	Q_{GD}		-	2.5	-	nC
Turn-on Delay Time (Note 1)	$\text{t}_{\text{D(ON)}}$	$\text{V}_{\text{DS}}=30\text{V}, \text{V}_{\text{GS}}=10\text{V}, \text{I}_D=0.5\text{A},$ $\text{R}_G=25\Omega$ (Note 1, 2)	-	4.4	-	ns
Rise Time	t_R		-	24	-	ns
Turn-off Delay Time	$\text{t}_{\text{D(OFF)}}$		-	122	-	ns
Fall-Time	t_F		-	25	-	ns
Source-drain diode ratings and characteristics						
Maximum Body-Diode Continuous Current	I_S		-	-	5	A
Maximum Body-Diode Pulsed Current	I_{SM}		-	-	10	A
Drain-Source Diode Forward Voltage (Note 1)	V_{SD}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_S=5.0\text{A}$	-	-	1:4	V
Reverse Recovery Time (Note 1)	t_{rr}	$\text{V}_{\text{GS}}=0\text{V}, \text{I}_S=5.0\text{A},$ $d\text{I}_F/dt=100\text{A}/\mu\text{s}$ (Note 1)	-	328	-	ns
Reverse Recovery Charge	Q_{rr}		-	2.65	-	μC


Notes: 1. Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.

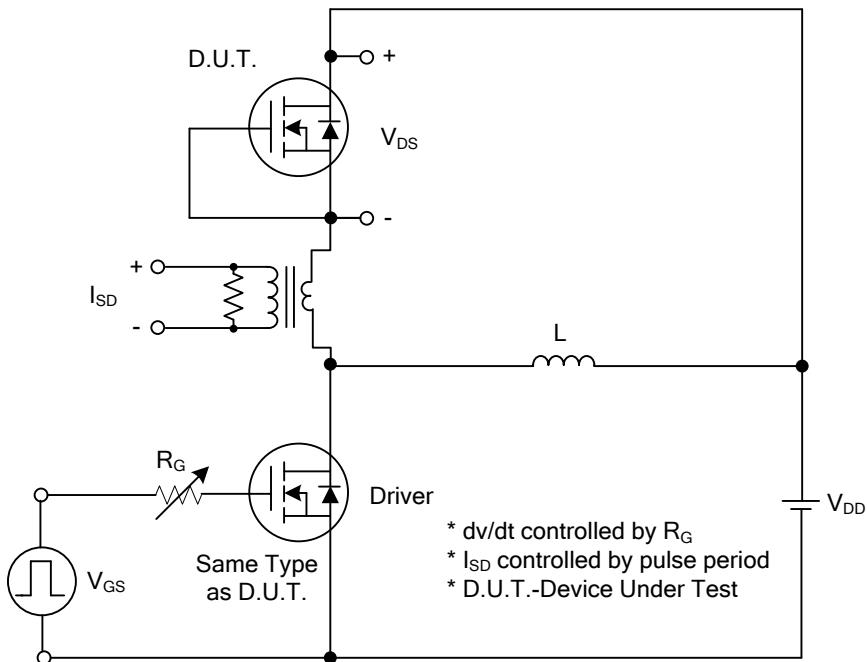■ TEST CIRCUITS AND WAVEFORMS









Peak Diode Recovery dv/dt Test Circuit






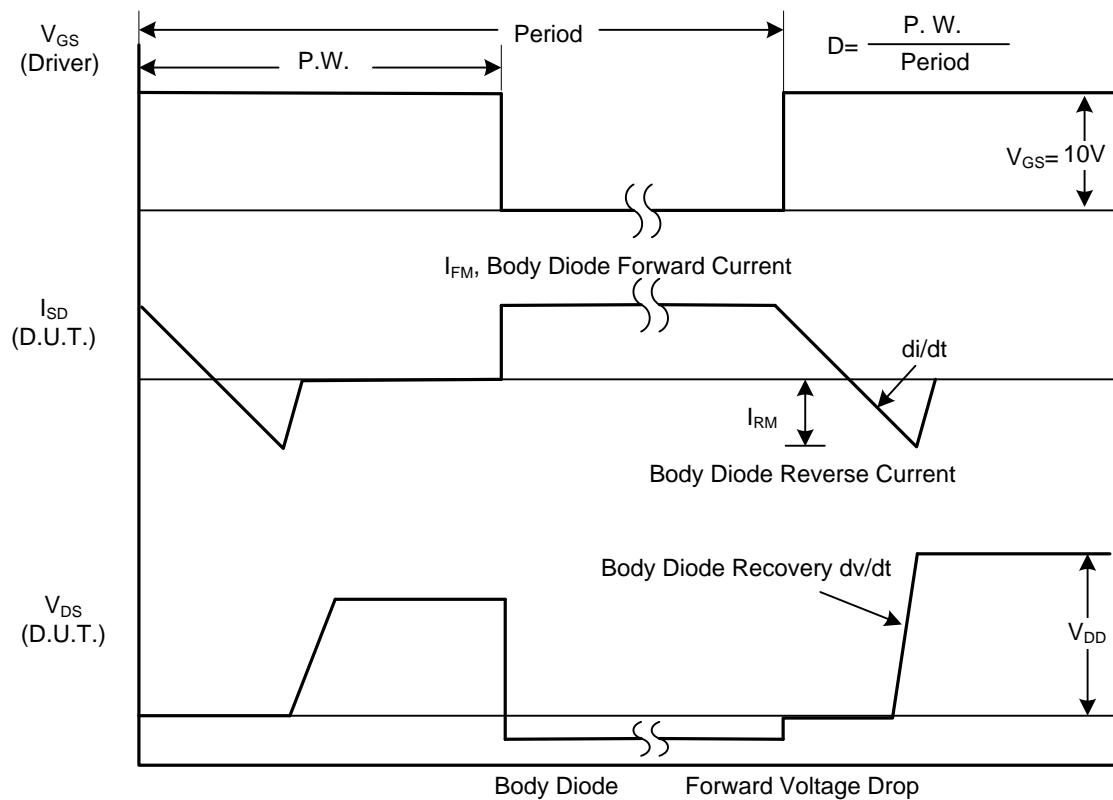


Peak Diode Recovery dv/dt Waveforms

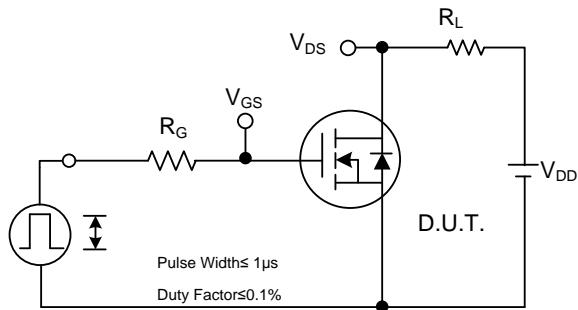
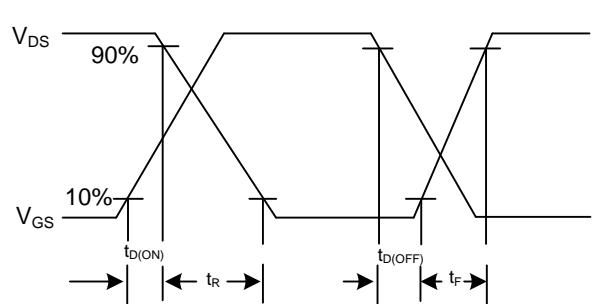
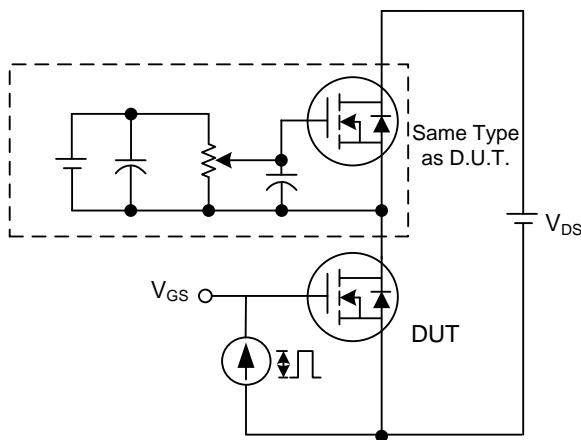
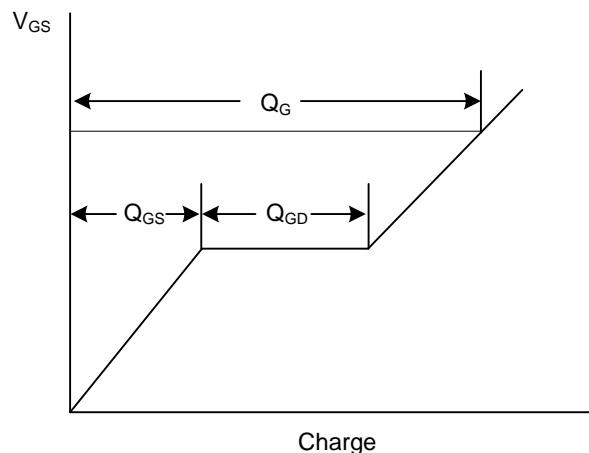
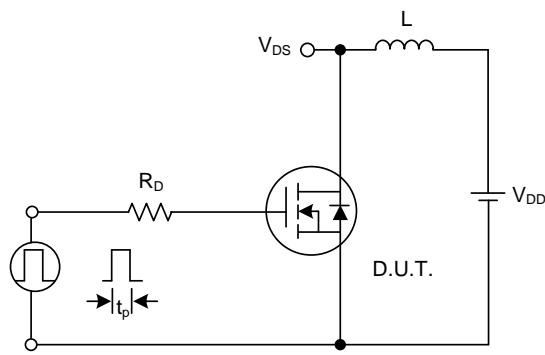
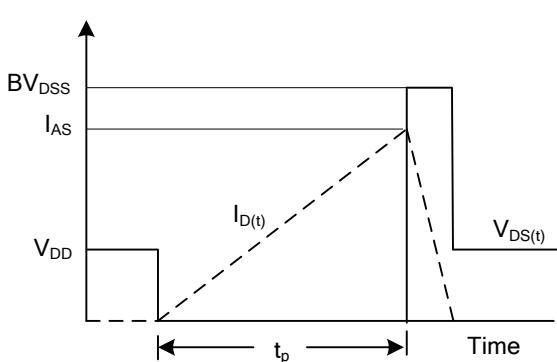
■ TEST CIRCUITS AND WAVEFORMS(Cont.)


Switching Test Circuit

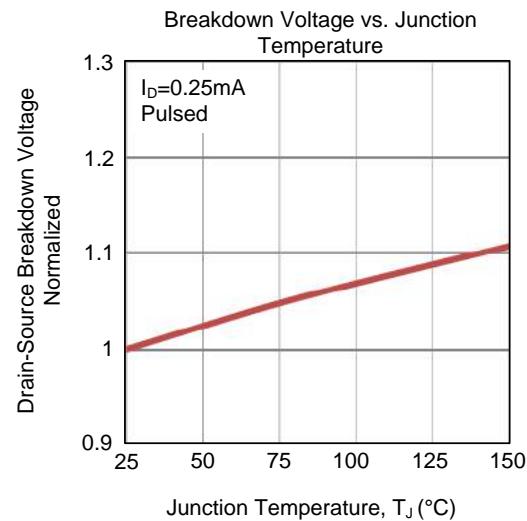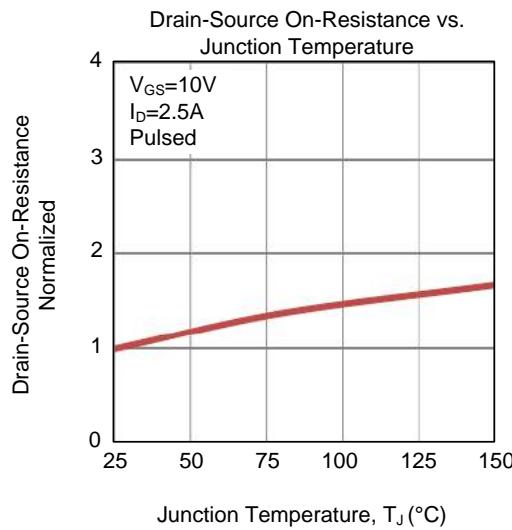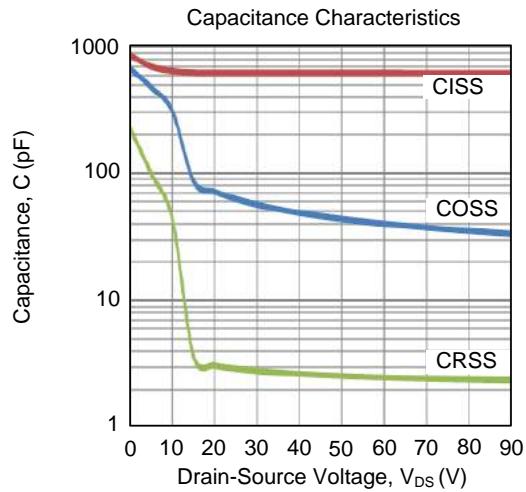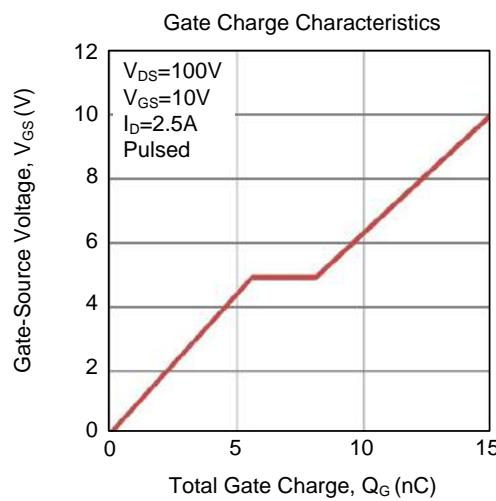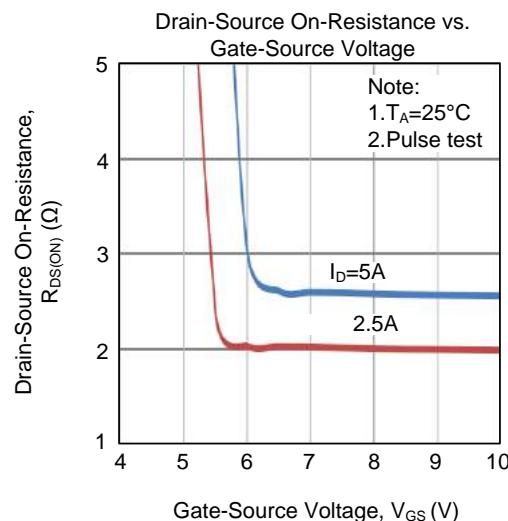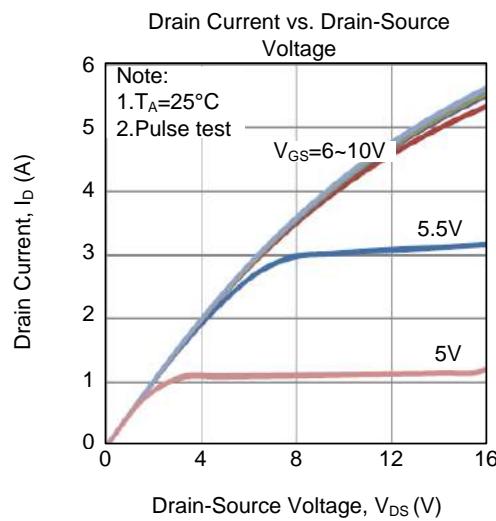Switching Waveforms

Gate Charge Test Circuit

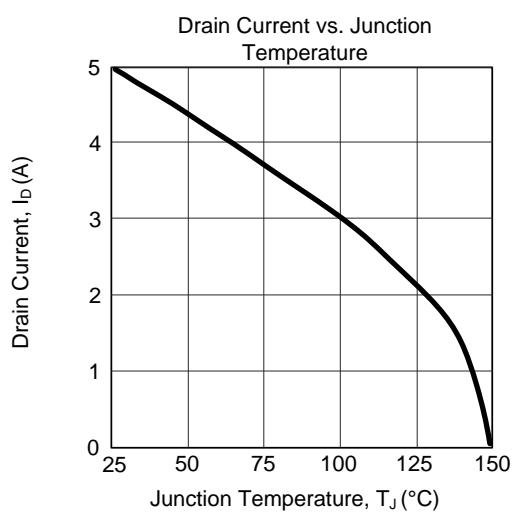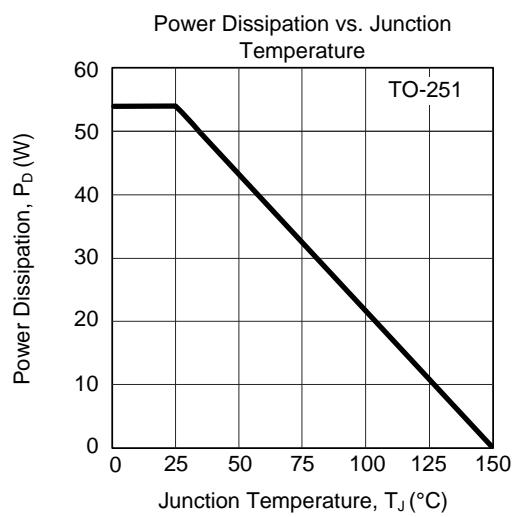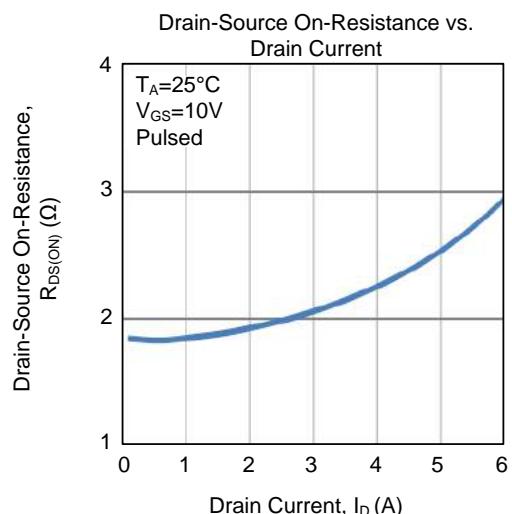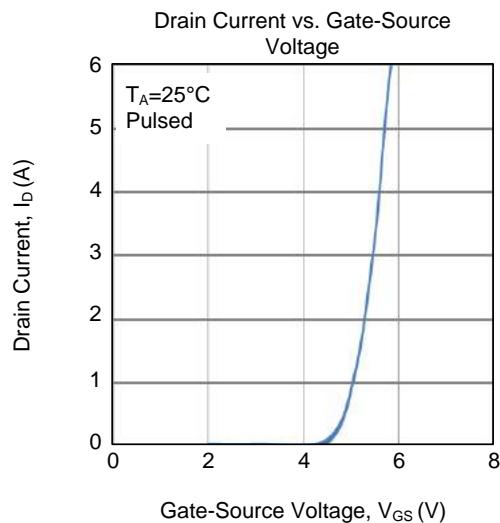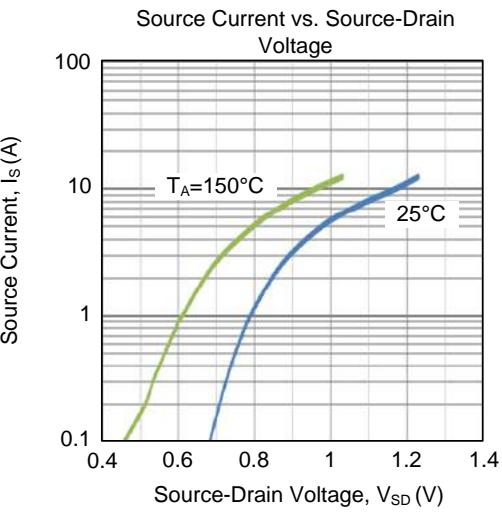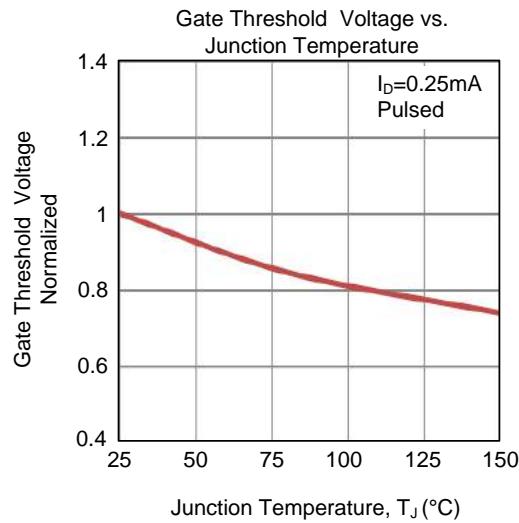Gate Charge Waveform

Unclamped Inductive Switching Test Circuit

Unclamped Inductive Switching Waveforms

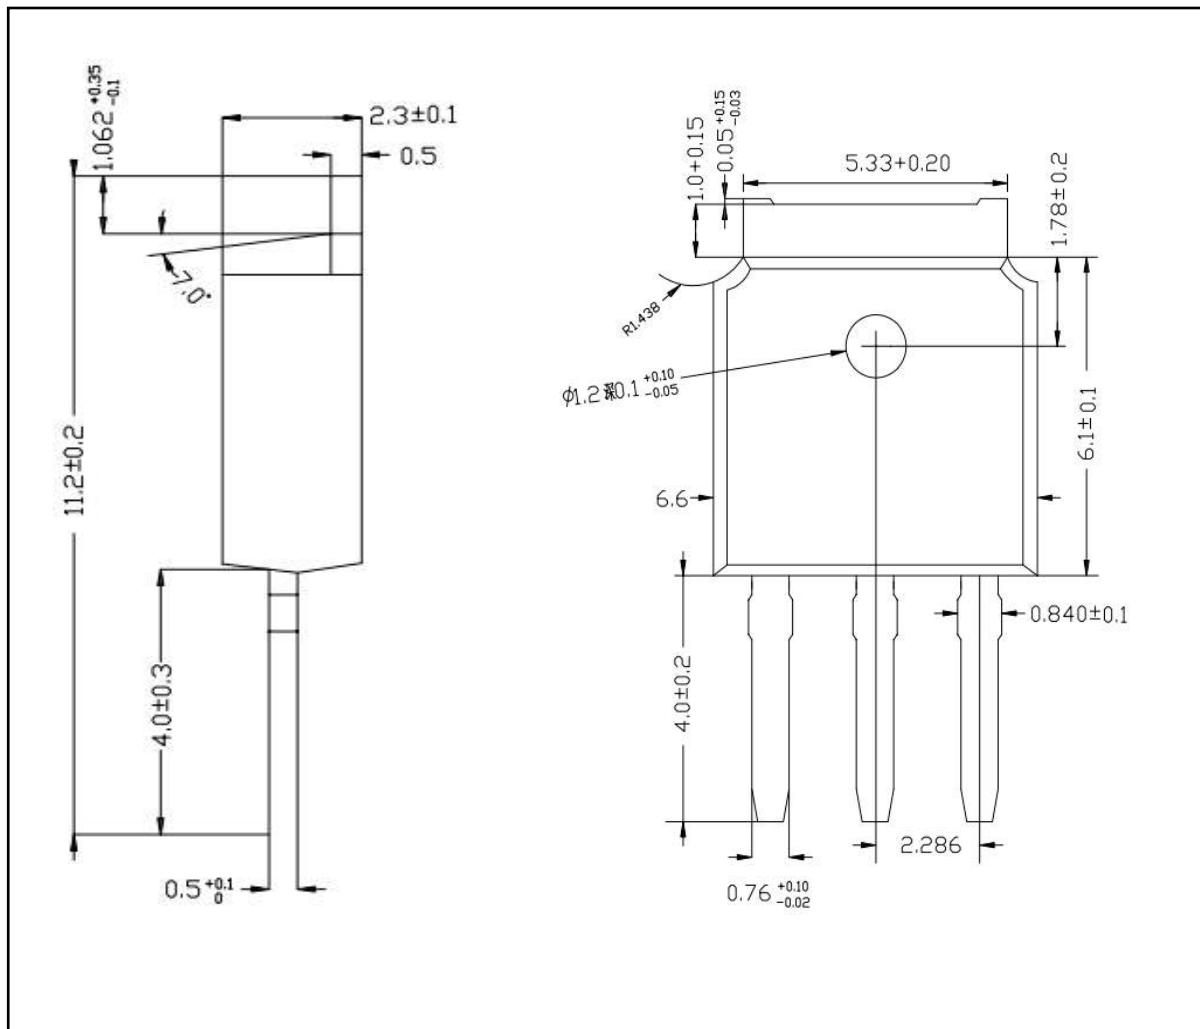
■ TYPICAL CHARACTERISTICS




■ TYPICAL CHARACTERISTICS(Cont.)



■ TO-251-3L PACKAGE OUTLINE DIMENSIONS



■ TO-252-2L PACKAGE OUTLINE DIMENSIONS

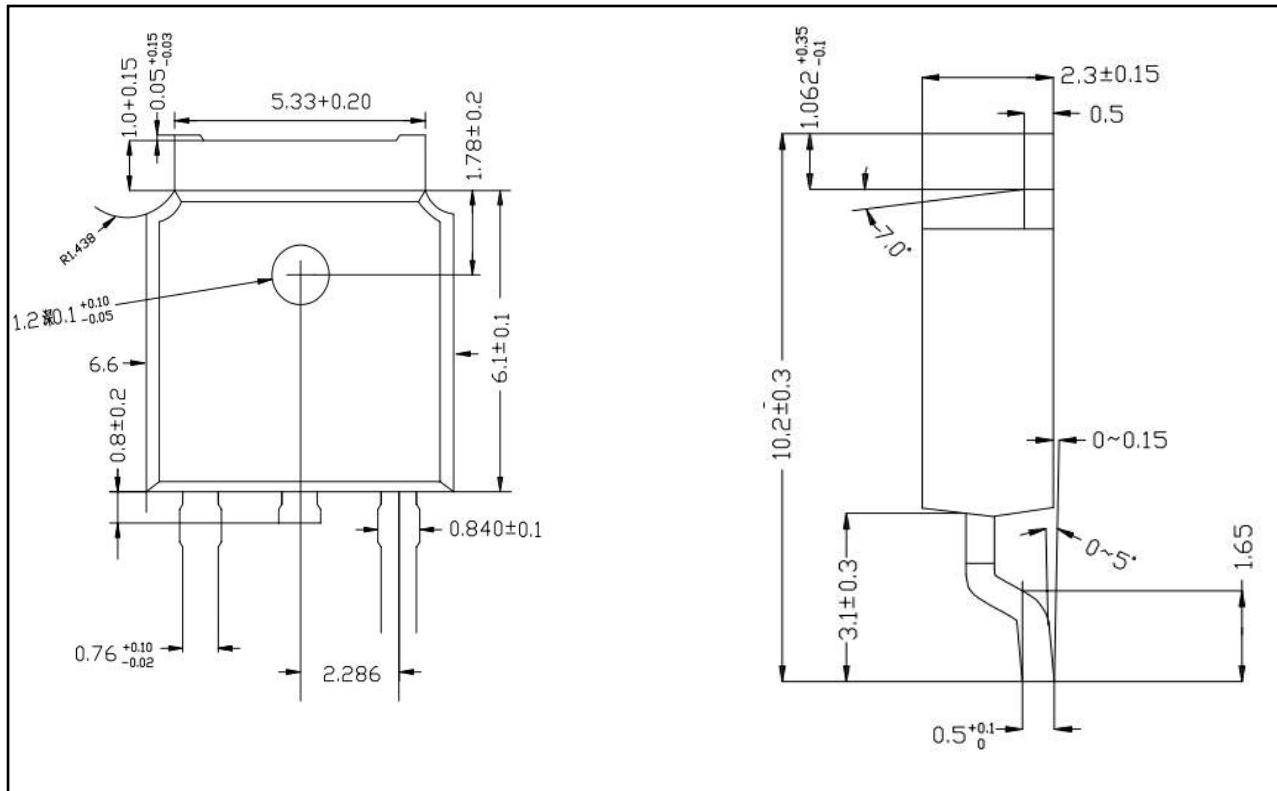

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by MOT manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#) [SLF10N65ABV2](#)
[BSO203SP](#) [BSO211P](#) [IPA60R230P6](#) [IPA60R460CE](#)