

■ PRODUCT CHARACTERISTICS




VDSS	700V
$R_{DS(on)}$ Typ(@ $V_{GS}=10V$)	0.24 Ω
Qg@type	27nC
ID	15A

■ FEATURES

- Ultra low $R_{DS(on)}$
- Ultra low gate charge
- 100% UIS tested
- RoHS compliant

■ APPLICATIONS

- Power factor correction
- Switched mode power supplies
- Uninterruptible power supply

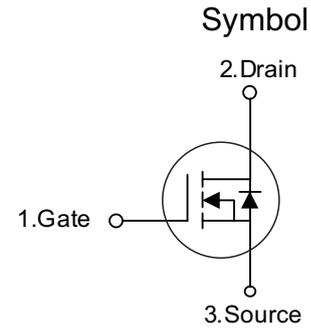

■ ORDER INFORMATION

Order codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT70R280C	TO-251	70 pieces/Tube
N/A	MOT70R280D	TO-252	2500 pieces/Reel

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Drain-Source Voltage ($V_{GS} = 0V$)	V_{DSS}	700	V
Continuous Drain Current	I_D	15	A
Pulsed Drain Current	I_{DM}	45	A
Gate-Source Voltage	V_{GSS}	± 30	V
Single Pulse Avalanche Energy	E_{AS}	290	mJ
Avalanche Current	I_{AS}	2.4	A
MOSFET dv/dt ruggedness, $V_{DS} = 0 \dots 480V$	dv/dt	50	V/ns
Power Dissipation ($T_C = 25^\circ C$)	P_D	104	W
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.2	$^\circ C/W$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62	$^\circ C/W$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	$^\circ C$

■ ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Static characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	700	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 700V, V_{GS} = 0V, T_J = 25^\circ C$	-	-	1	μA
		$V_{DS} = 700V, V_{GS} = 0V, T_J = 150^\circ C$	-	-	100	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS} = \pm 30V$	-	-	± 100	nA
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.5	-	4.5	V
Drain-Source On-State-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 7.5A$	-	0.24	0.28	Ω
Gate Resistance	R_G	$f = 1.0MHz$ open drain	-	12.5	-	Ω
Dynamic characteristics						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 100V,$ $f = 1.0MHz$	-	1122	-	pF
Output Capacitance	C_{oss}		-	38	-	pF
Reverse Transfer Capacitance	C_{rss}		-	2.5	-	pF
Total Gate Charge	Q_g	$V_{DD} = 520V, I_D = 15A,$ $V_{GS} = 10V$	-	27	-	nC
Gate-Source Charge	Q_{gs}		-	5.5	-	nC
Gate-Drain Charge	Q_{gd}		-	10.5	-	nC
Turn-on Delay Time	$t_{d(on)}$	$V_{DD} = 400V, I_D = 15A,$ $R_G = 25\Omega$	-	25	-	ns
Turn-on Rise Time	t_r		-	63	-	ns
Turn-off Delay Time	$t_{d(off)}$		-	100	-	ns
Turn-off Fall Time	t_f		-	50	-	ns
Drain-source body diode characteristics						
Body Diode Forward Voltage	V_{SD}	$T_J = 25^\circ C, I_{SD} = 15A, V_{GS} = 0V$	-	0.9	1.2	V
Reverse Recovery Time	t_{rr}	$V_R = 400V, I_F = I_S,$ $di_F/dt = 100A/\mu s$	-	410	-	ns
Reverse Recovery Charge	Q_{rr}		-	4.1	-	μC
Peak Reverse Recovery Current	I_{rrm}		-	20	-	A

■ TYPICAL CHARACTERISTICS

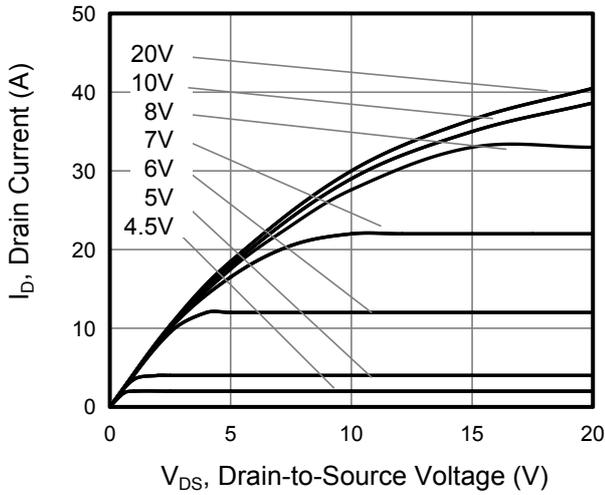


Figure 1. Output Characteristics

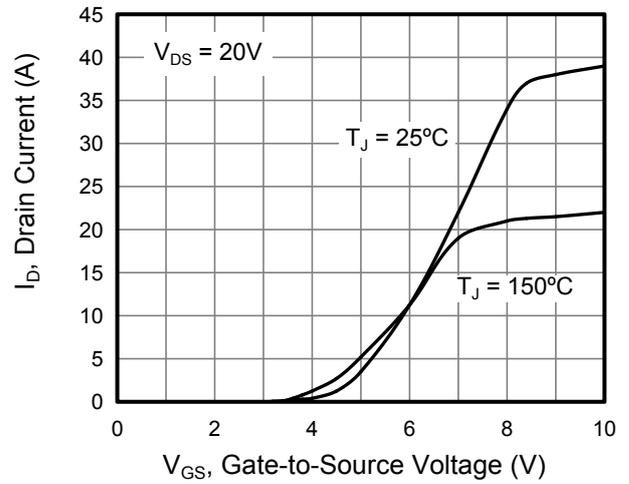


Figure 2. Transfer Characteristics

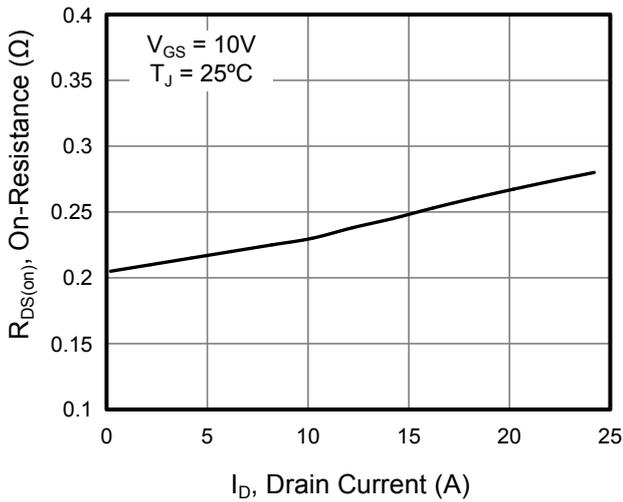


Figure 3. On-Resistance vs. Drain Current

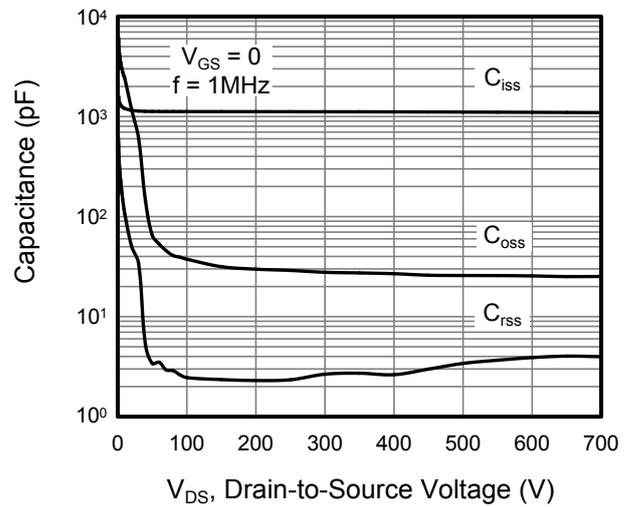


Figure 4. Capacitance

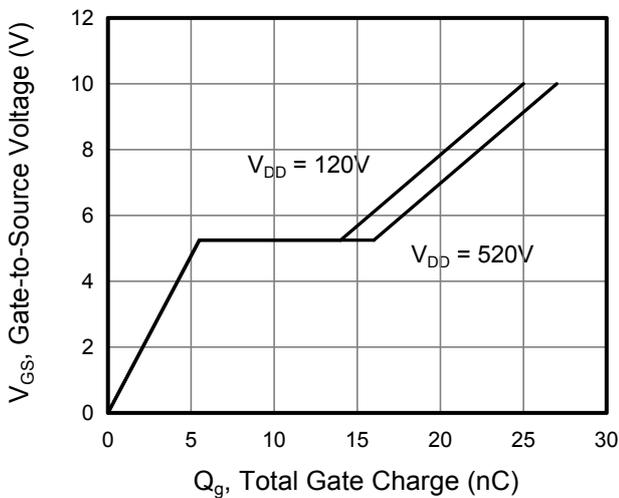


Figure 5. Gate Charge

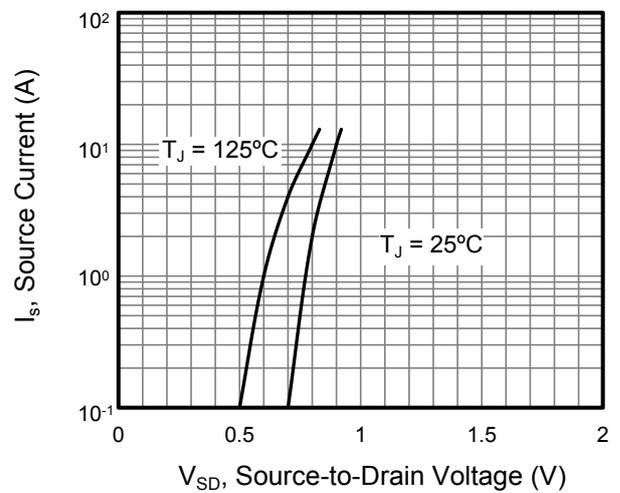


Figure 6. Body Diode Forward Voltage

■ TYPICAL CHARACTERISTICS(Cont.)

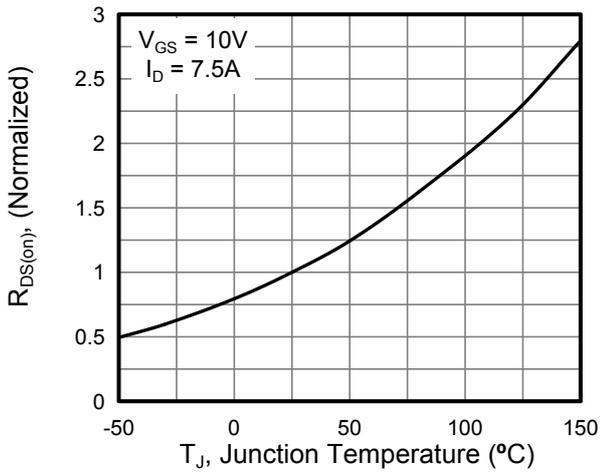


Figure 7. On-Resistance vs. Temperature

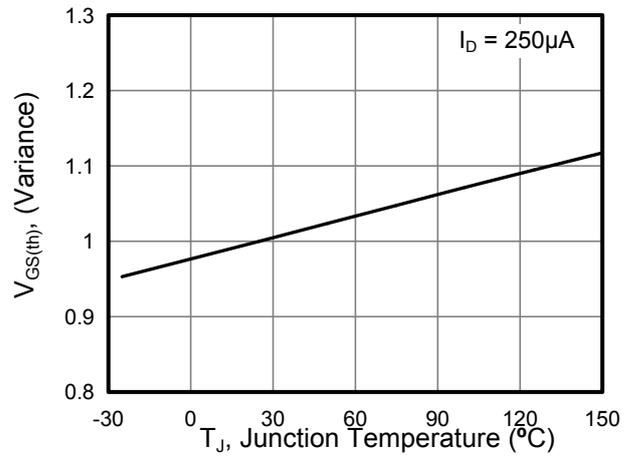


Figure 8. Breakdown voltage vs. Junction Temperature

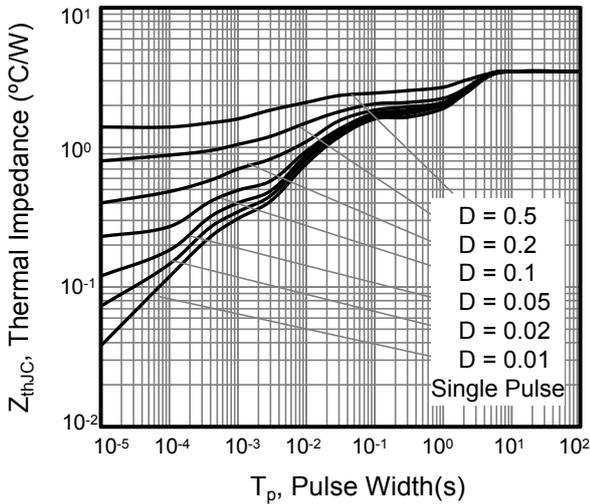


Figure 9. Transient Thermal Impedance

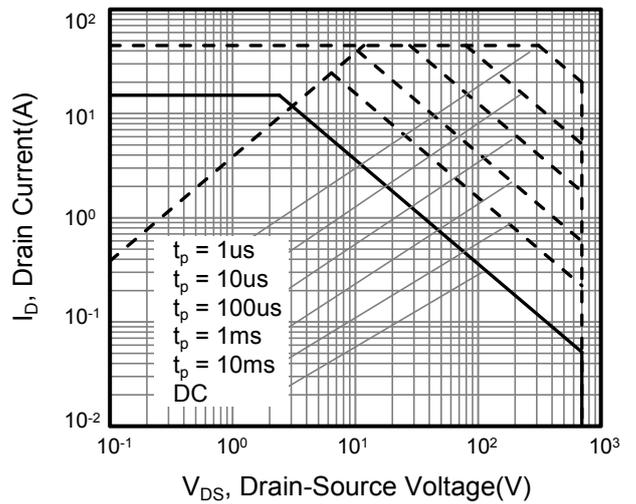


Figure 10. Safe Operation Area For


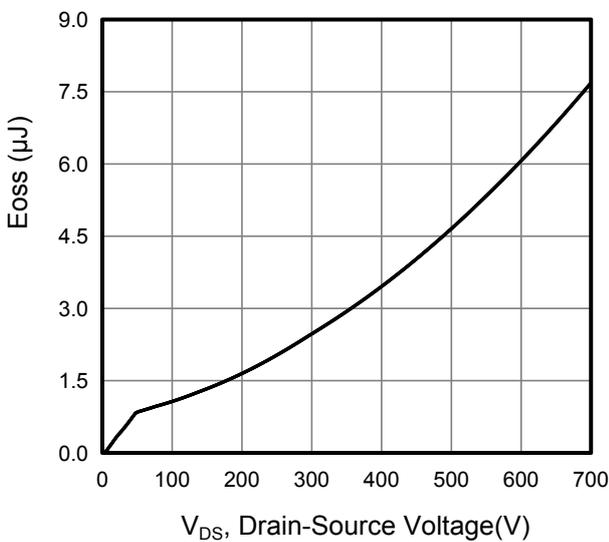


Figure 11. Typ. Coss Stored Energy

■ TO-252 PACKAGE OUTLINE DIMENSIONS

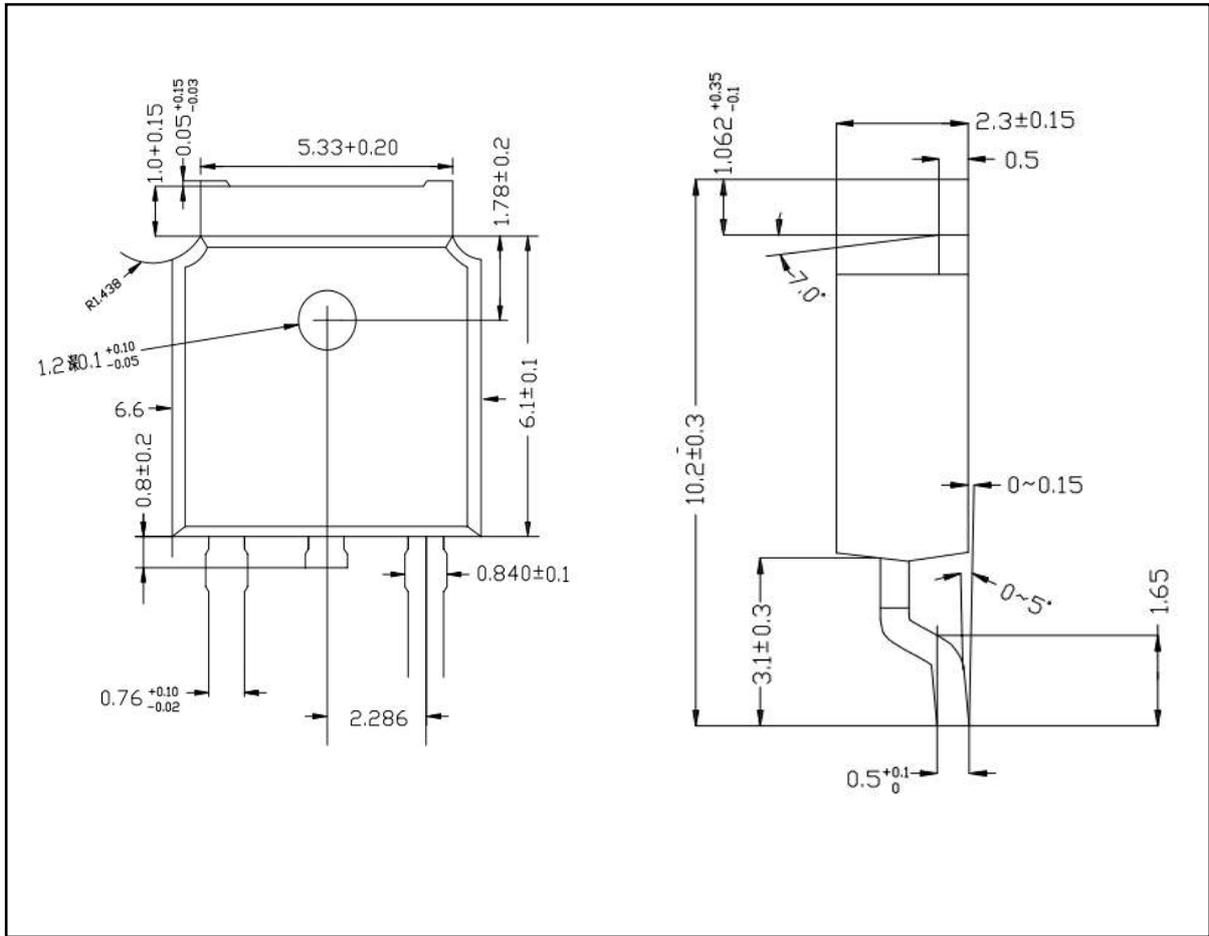

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [MOT](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#)
[WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTGR](#) [DMNH15H110SK3-13](#)
[SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#) [IPA60R230P6](#)