

SPECIFICATIONS:

Plastic material - polypropylene, PP-1040
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated steel spring
 Rivets - Brass, nickel plated
 Wires: 26AWG, UL1007, CSA, TR-64, 300V, 80°C
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

Angular ± 3°

Fractional ± .8 (.030)

decimal ±.5 (.020)

Tolerance (Except as noted)



Memory Protection Devices, Inc
 200 Broad Hollow Road, Farmingdale, New York 11735

Scale


Drawn By B.S.

Approved By T.B.

Date 03/07/19

Drawing Number

BC12AAW

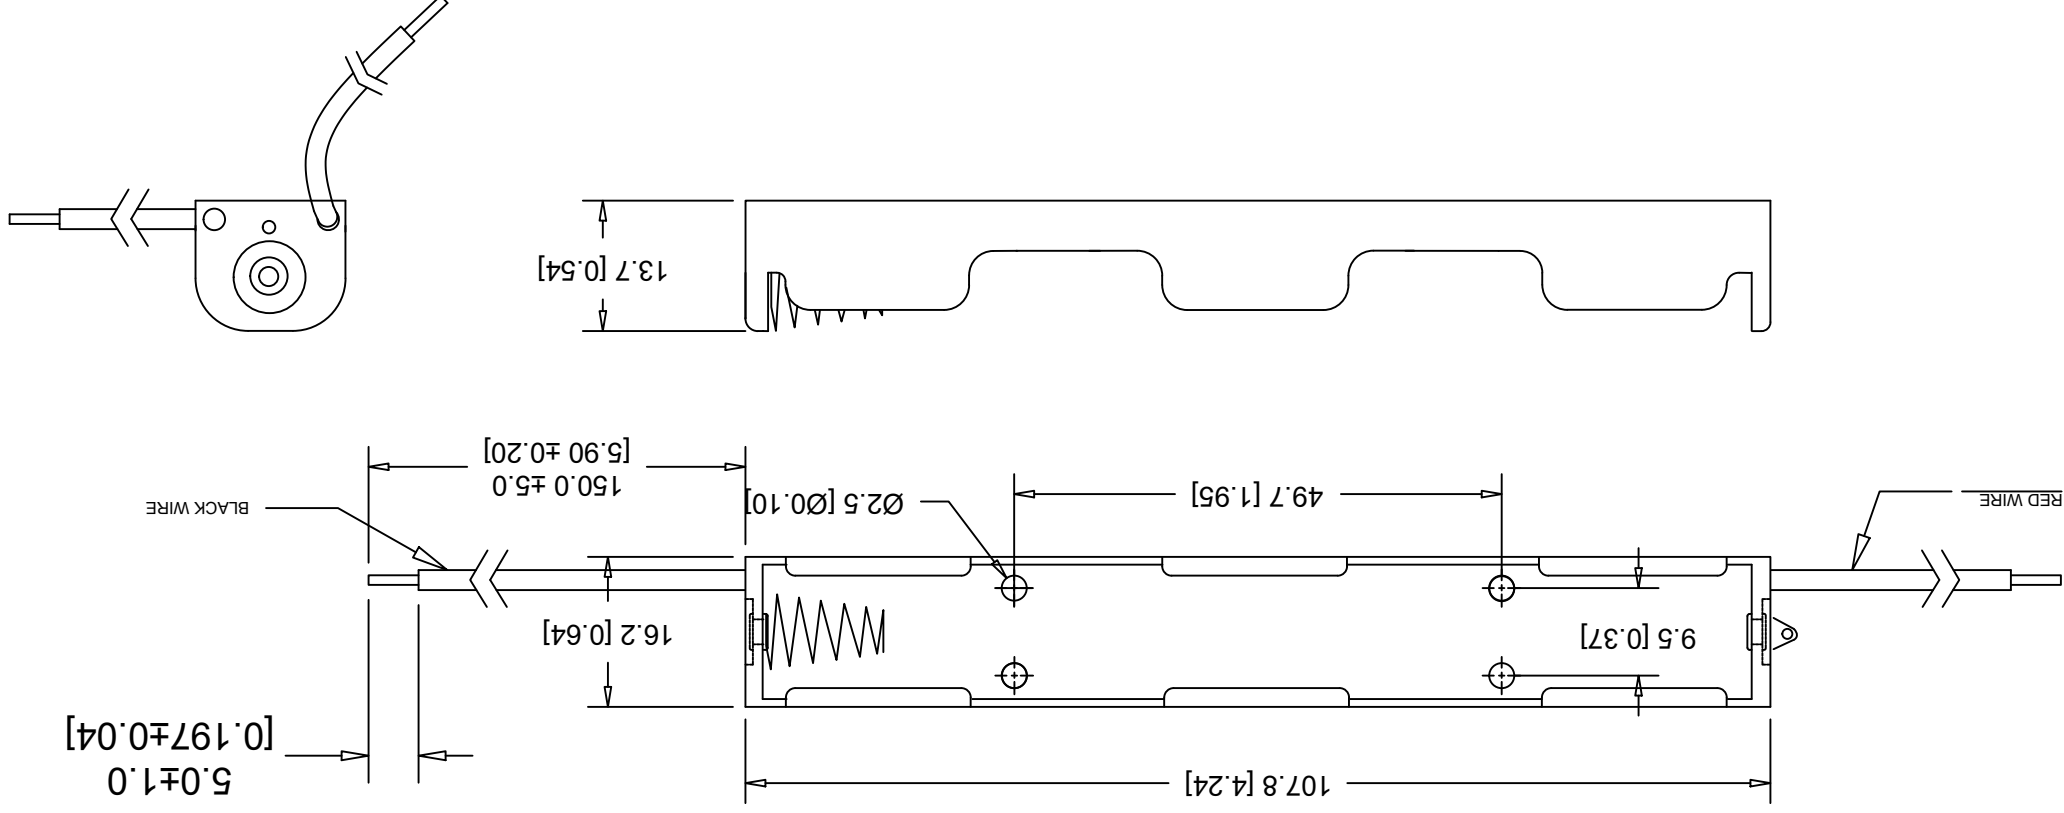

13.7 [0.54]

150.0 ±5.0
 [5.90 ±0.20]

16.2 [0.64]

Ø2.5 [Ø0.10]

49.7 [1.95]

9.5 [0.37]

107.8 [4.24]

5.0 ±1.0
 [0.197 ±0.04]

BLACK WIRE

RED WIRE

03/07/19

G

UPDATED TO "ROHS COMPLIANT"

T.B. B.S.

04/29/17

F

REDRAWN IN AUTOCAD

T.B. B.S.

Date

SYM

REVISION RECORD

AUTH DR. CK.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)