
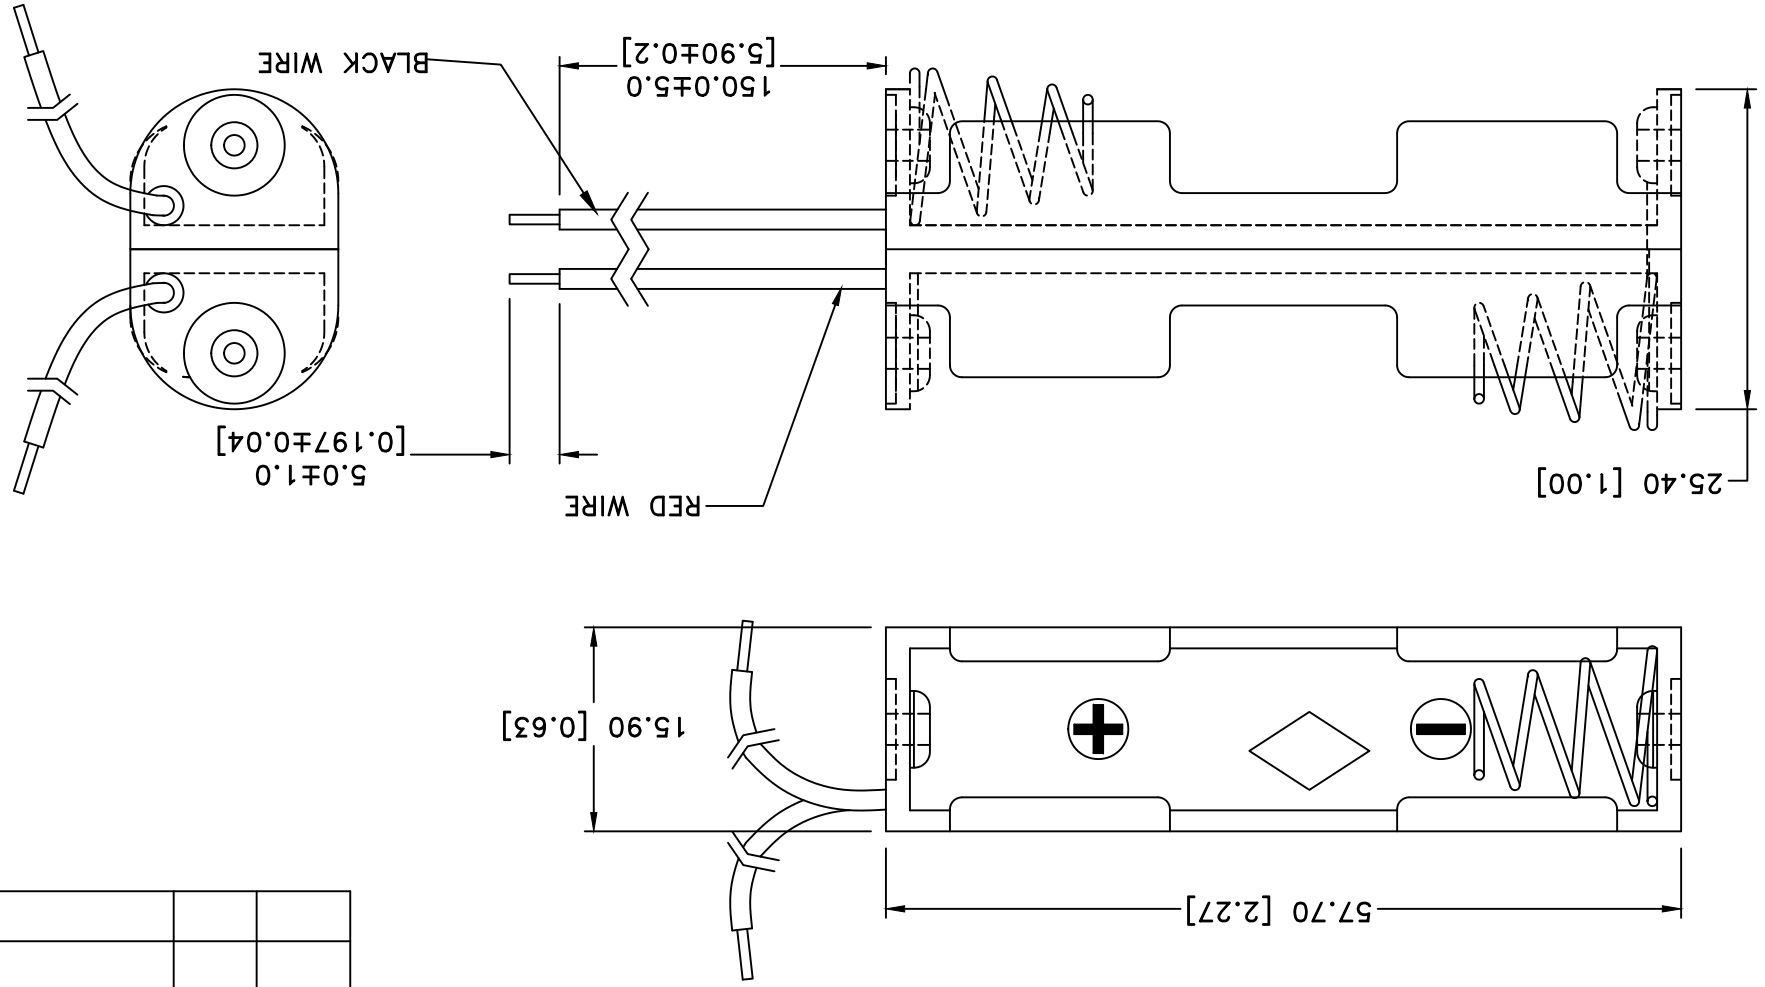


ROHS COMPLIANT
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 Wire: 26AWG, UL1007, CSA, TR64, 300V, 80°C
 Rivets - Brass, Nickel Plated
 Springs - Nickel Plated Spring Steel
 Temperature Range: -10°C to +100°C
 Flammability Rating -UL94-HB, UL File NO. E216959
 Plastic material - Polypropylene, PP-1040

NOTES:

Angular ± 3°	Date 03/07/19
Fractional ± .8 (.030)	Title TWO "AA" CELL HOLDER WITH WIRE LEADS
decimal ±.5 (.020)	
Tolerance (Except as noted)	

Memory Protection Devices, Inc  200 Broad Hollow Road, Farmingdale, New York 11735		Scale	Drawn By B.S.	Approved By T.B.
Drawing Number BC22AAW				



Date	SYM	REVISION RECORD	AUTH	DR. CK.
04/21/17	F	DIM. 57.70 WAS 58.40 DIM. 150.0 WAS 152.4 UPDATED NOTES	T.B.	B.S.
03/07/19	G	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)