
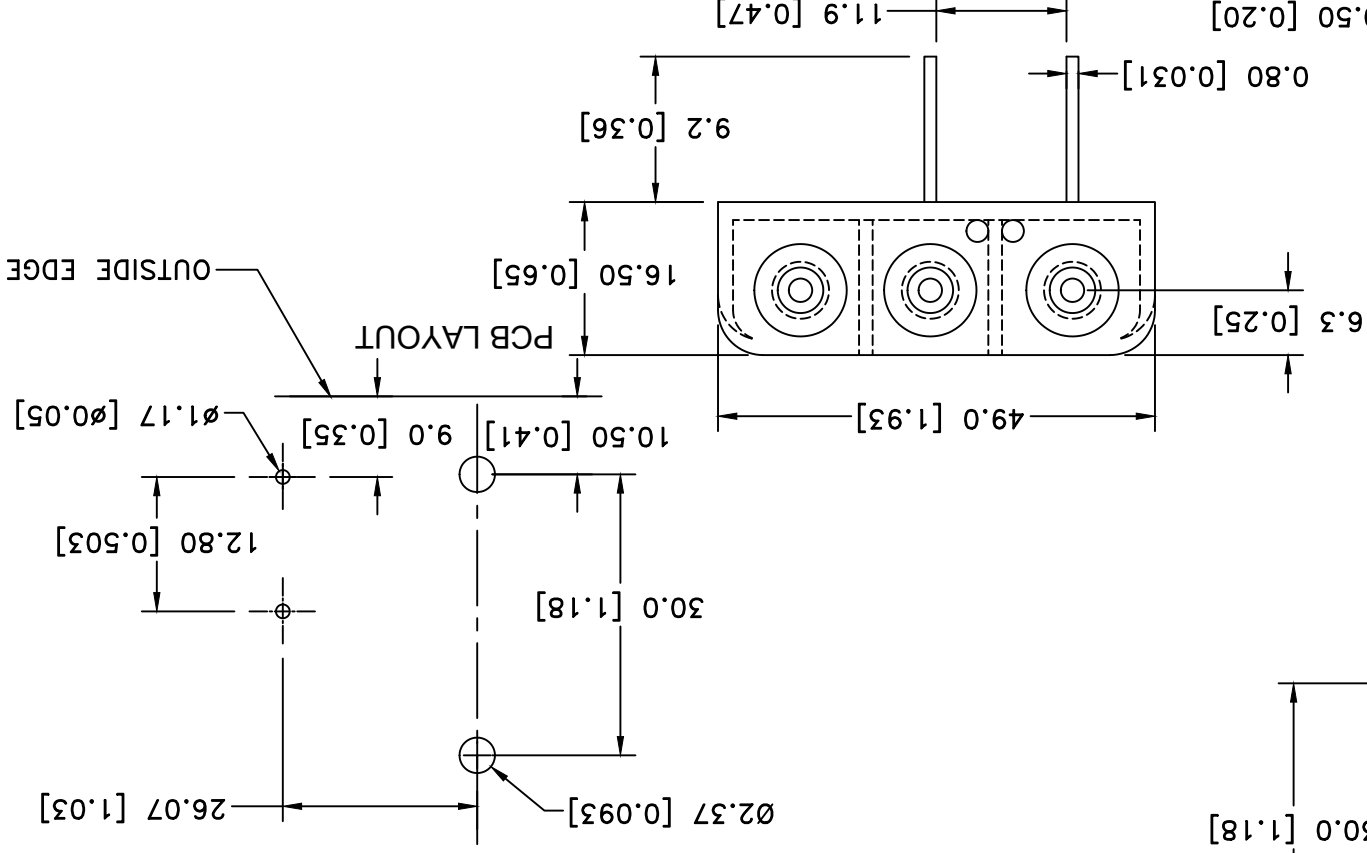
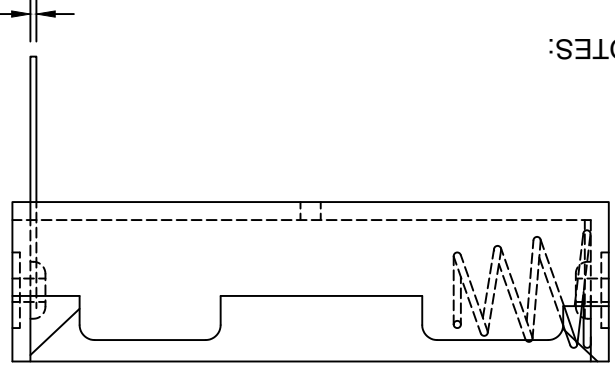


HOUSING : POLYPROPYLENE  
 FLAMMABILITY RATING: UL94 HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C TO +100°C  
 RIVETS: BRASS, NICKEL PLATED.  
 SPRING: SPRING STEEL, NICKEL PLATED.  
 PC PINS: STEEL, NICKEL PLATED  
 CONTACT RESISTANCE: UNDER 50m Ω FOR ± CONTACTS PER  
 EIA-540J000  
 ROHS COMPLIANT

1. MATERIAL:

NOTES:

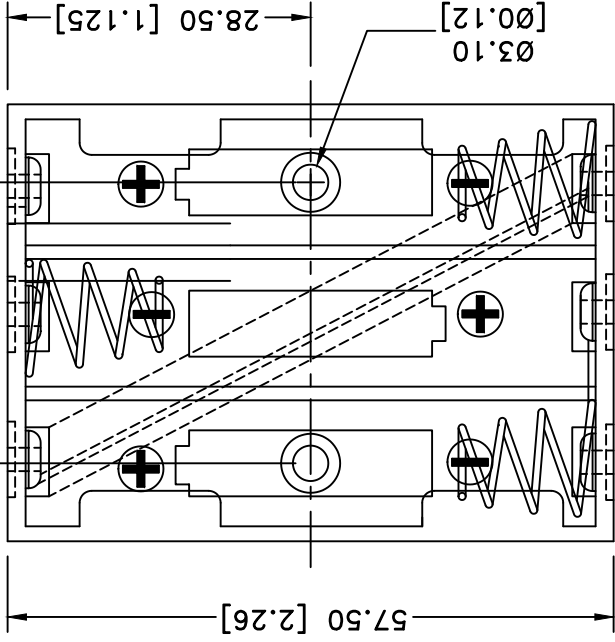

Date	SYM	REVISION RECORD	AUTH	DR. CK.
05/05/17	E	DIM. 9.2 WAS 10.54 ADDED DIM. 11.9, Ø3.10	T.B.	B.S.
05/12/17	F	DIM. 57.50 WAS 57.40	T.B.	B.S.
05/19/18	G	DIM. 12.80 WAS 15.80	T.B.	B.S.
02/13/19	H	DIM. 0.80 WAS 0.90 DIM. 0.50 WAS 0.51	T.B.	B.S.
03/06/19	J	Updated to "ROHS Compliant"	T.B.	B.S.

Tolerance  
 (Except as noted)

decimal  
 ±.5 (.020)

Fractional  
 ±.8 (.030)

Angular  
 ± 3°



Memory Protection Devices, Inc  
 200 Broad Hollow Road, Farmingdale, New York 11735

Scale

Drawn By B.S.

Approved By T.B.

Title  
 THREE "AA" CELL HOLDER

Date  
 03/06/19

Drawing Number  
 BC3AAPC

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mpd](#) manufacturer:*

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)  
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)  
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)  
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)