


SPECIFICATIONS :

Plastic material - polypropylene
 Flammability Rating-UL94 HB, UL File No. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel
 Rivets - Brass, nickel plated
 Wires: 26AWG, UL1007,CSA, TR64, 300V, 80°C
 Contact Resistance: Under 50m Ω for +/- contacts per EIA-540J000
 ROHS COMPLIANT

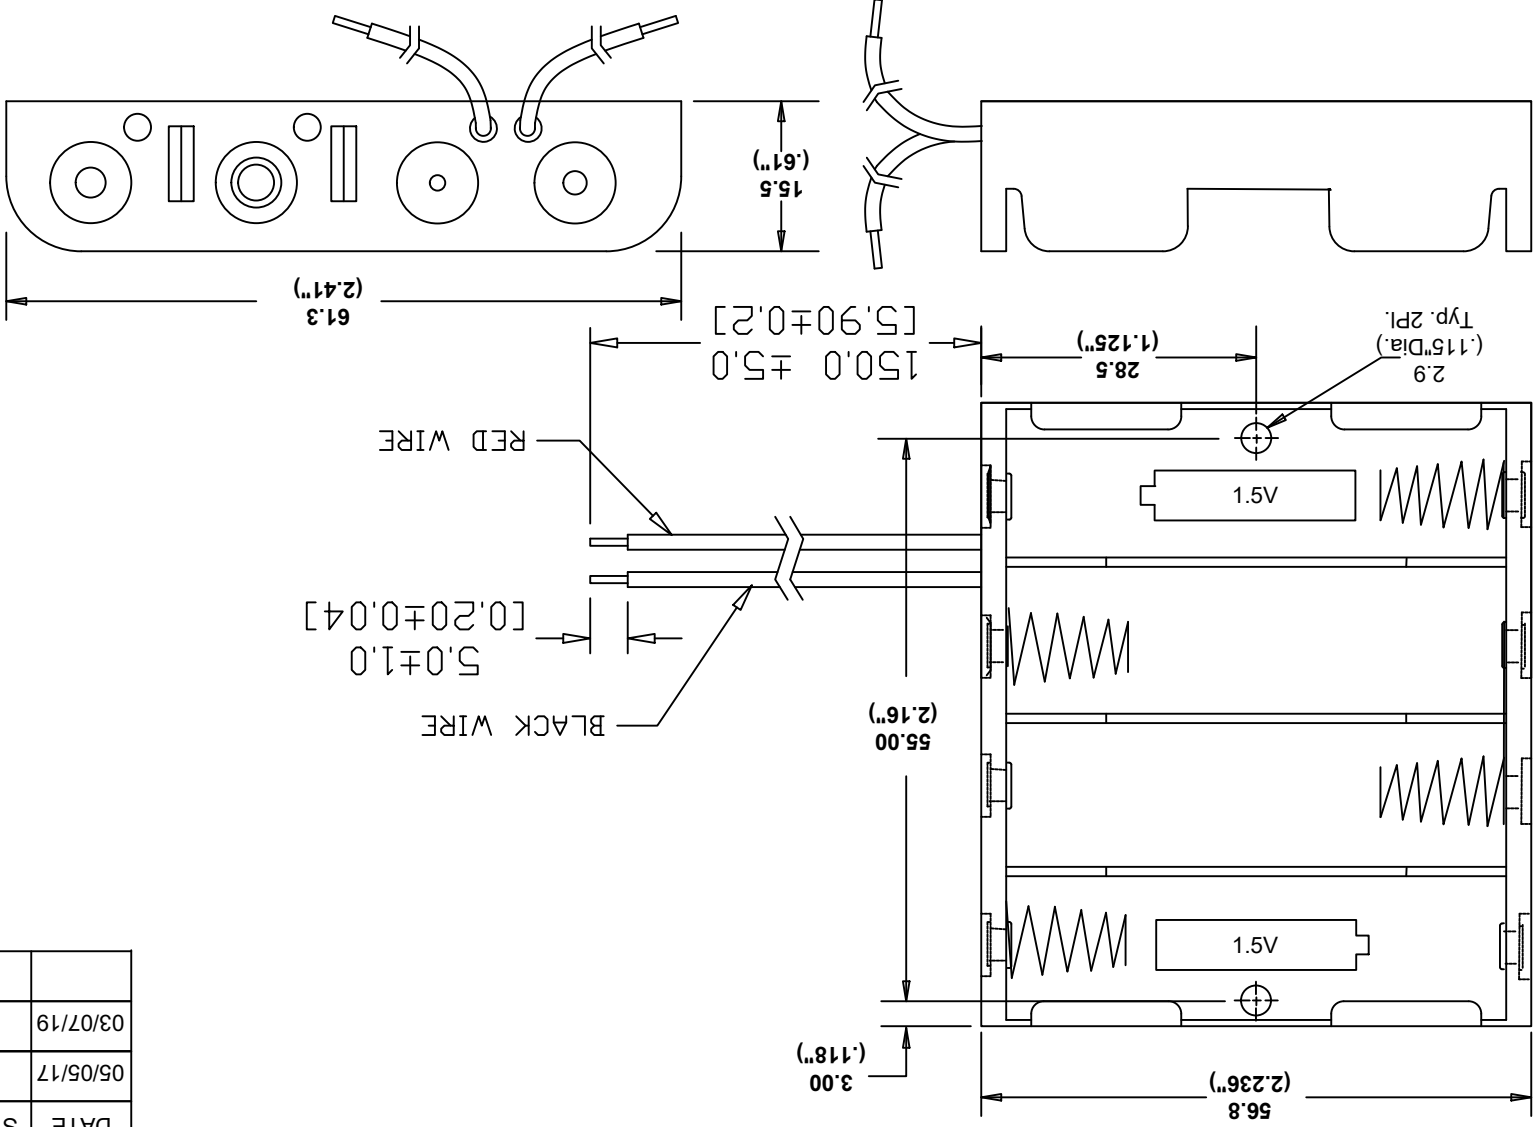

Note: Dimensions in mm. (inches)

Tolerance
 (Except as noted)



200 Broad Hollow Road, Farmingdale, New York 11735

Memory Protection Devices, Inc

Scale

Drawn By B.S.

Approved By T.B.

Title
 FOUR "AA" CELL HOLDER WITH WIRE LEADS

Drawing Number

BC4AAW

Angular
 ± 3°

Date
 03/07/19

DATE	SYM	REVISION RECORD	AUTH	DR.	CK
05/05/17	F	DIM. 150.0 WAS 152.4	T.B.	B.S.	
03/07/19	G	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)