


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/10/14	D	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
05/12/17	Ш	DIM. 16.56 WAS 17.20	T.B.	B.S.	
·			·		

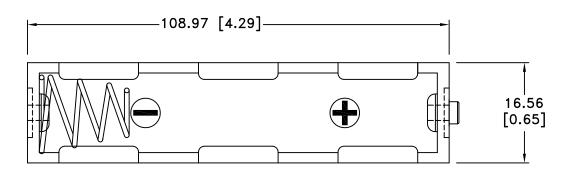

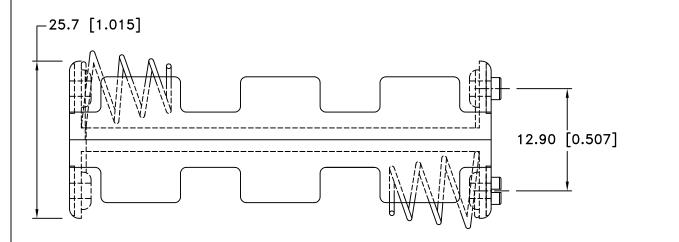



NOTES:

Plastic material - Polypropylene

Flammability Rating -UL94-HB, UL File NO. E216959

Temperature Range: -10°C to +100°C Springs - Nickel Plated Spring Steel

Rivets - Brass, Nickel Plated

9 Volts snaps: Brass, Nickel Plated

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER

EIA-540J000

ROHS 2 COMPLIANT

Tolerance	Memory Protection Devices, Inc							
(Except as noted)	200 Broad Hollow Road, Farmingdale, New York 11735							
·								
decimal			Scale	Drawn By B.S.				
±.5 (.020)				Approved By T.B.				
Fractional	Title FOUR "AA" CELL HOLDER WITH SNAP FASTENER:							
± .8 (.030)								
Angular	Date	Drawing Number						
± 3°	05/12/17	BH14AASF						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for mpd manufacturer:

Other Similar products are found below:

AS212-L BH24AAAL BC4AAAPC ZA5075 BC4AAAL AP-130 BK-5021 ZA5070 BC3AAPC BH9VL APP-004 AP-133 BH2/3AC

413717H BC22AAL SBH421AS BH48DW AP-124 APP-001 BC-2013 BC3AAAPC AP-129 ZA5074-B BS4T-HD ZA5350 ZA5076

ABG-43 SBH441AS ZA1060 AP-131 BH-20H-1T BE-2AAAA-PC AS212 BH26AAL BC2AAAL BHX1-1225-PC BH2/3A-SM BS6T

BA2032 BH26DL BH1/2AA-3 ZA5036 BH2DL BC12AAL BH24AAAW BK-5091 BH24AASF BC3AAL BH9VW BK-5003