	B.S.	.8.T	4.521 SAW 0.031 .MID 81.5 SAW 0.3 .MID	_	Z1/0E/90	
	B.S.	.8.T	S SHOR TO TO ROHS S COMPLIANT		10/03/14	
	.s.a	.a.T	UPDATED NOTES	A	11/91/60	with protected 18650 batteries (PCB)
Κ'	ס 'אנו	HTUA	KE∧1210N KECOKD	MYZ	Date	This battery holder is designed for use

61/11/90

07/22/17


SETON GETAGRU ADDED MOUNTING INSTRUCTION

.S.B

.S.B

.a.T

.B.T

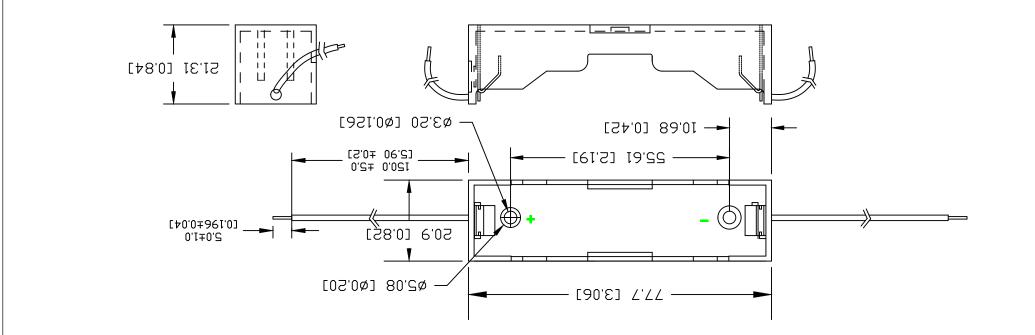

Flammability Rating: UL 94V-0
Contacts: 302 Stainless Steel Spring Temper, Mickel Plated
Temperature Range: -40°c to +180°c
Material: Self-extinguishing Thermoplastic Polyester, color black
NOTES:

Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene

Use 2-56 machine screws or eyelets 0.089" OD

Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.

also adhesives and double sided tapes work well. by 0.15" flange stimpson GS-3 series or equivalent.

Wires: 24AWG, TR64, 300V, 80°C

Mounting Instruction:

ROHS COMPLIANT Weight: 12.67g.

M	1-18650 Johan	02\1\\10 D⊄f6	.ε ∓ JohgnAn				
930.	Janoit⊃an7 (050,) 8, ±						
Approved By T.B.				F'2 ('050)			
Drawn By B.S.	Σ⊂αίε			Decimαl			
Tolerance (Inches) 200 Broad Hollow Road, Farmingdale, New York 11735							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for mpd manufacturer:

Other Similar products are found below:

AS212-L BH24AAAL BC4AAAPC ZA5075 BC4AAAL AP-130 BK-5021 ZA5070 BC3AAPC BH9VL APP-004 AP-133 BH2/3AC

413717H BC22AAL SBH421AS BH48DW AP-124 APP-001 BC-2013 BC3AAAPC AP-129 ZA5074-B BS4T-HD ZA5350 ZA5076

ABG-43 SBH441AS ZA1060 AP-131 BH-20H-1T BE-2AAAA-PC AS212 BH26AAL BC2AAAL BHX1-1225-PC BH2/3A-SM BS6T

BA2032 BH26DL BH1/2AA-3 ZA5036 BH2DL BC12AAL BH24AAAW BK-5091 BH24AASF BC3AAL BH9VW BK-5003