


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/17/14	C	DIM. Ø3.0 WAS Ø2.0	T.B.	B.S.	
07/07/17	D	DIM. 150.0 WAS 152.40 DIM. 5.0 WAS 3.18 DIM. 38.0 WAS 37.60 ADDED DIM. Ø1.95	T.B.	B.S.	
07/17/17	E	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	

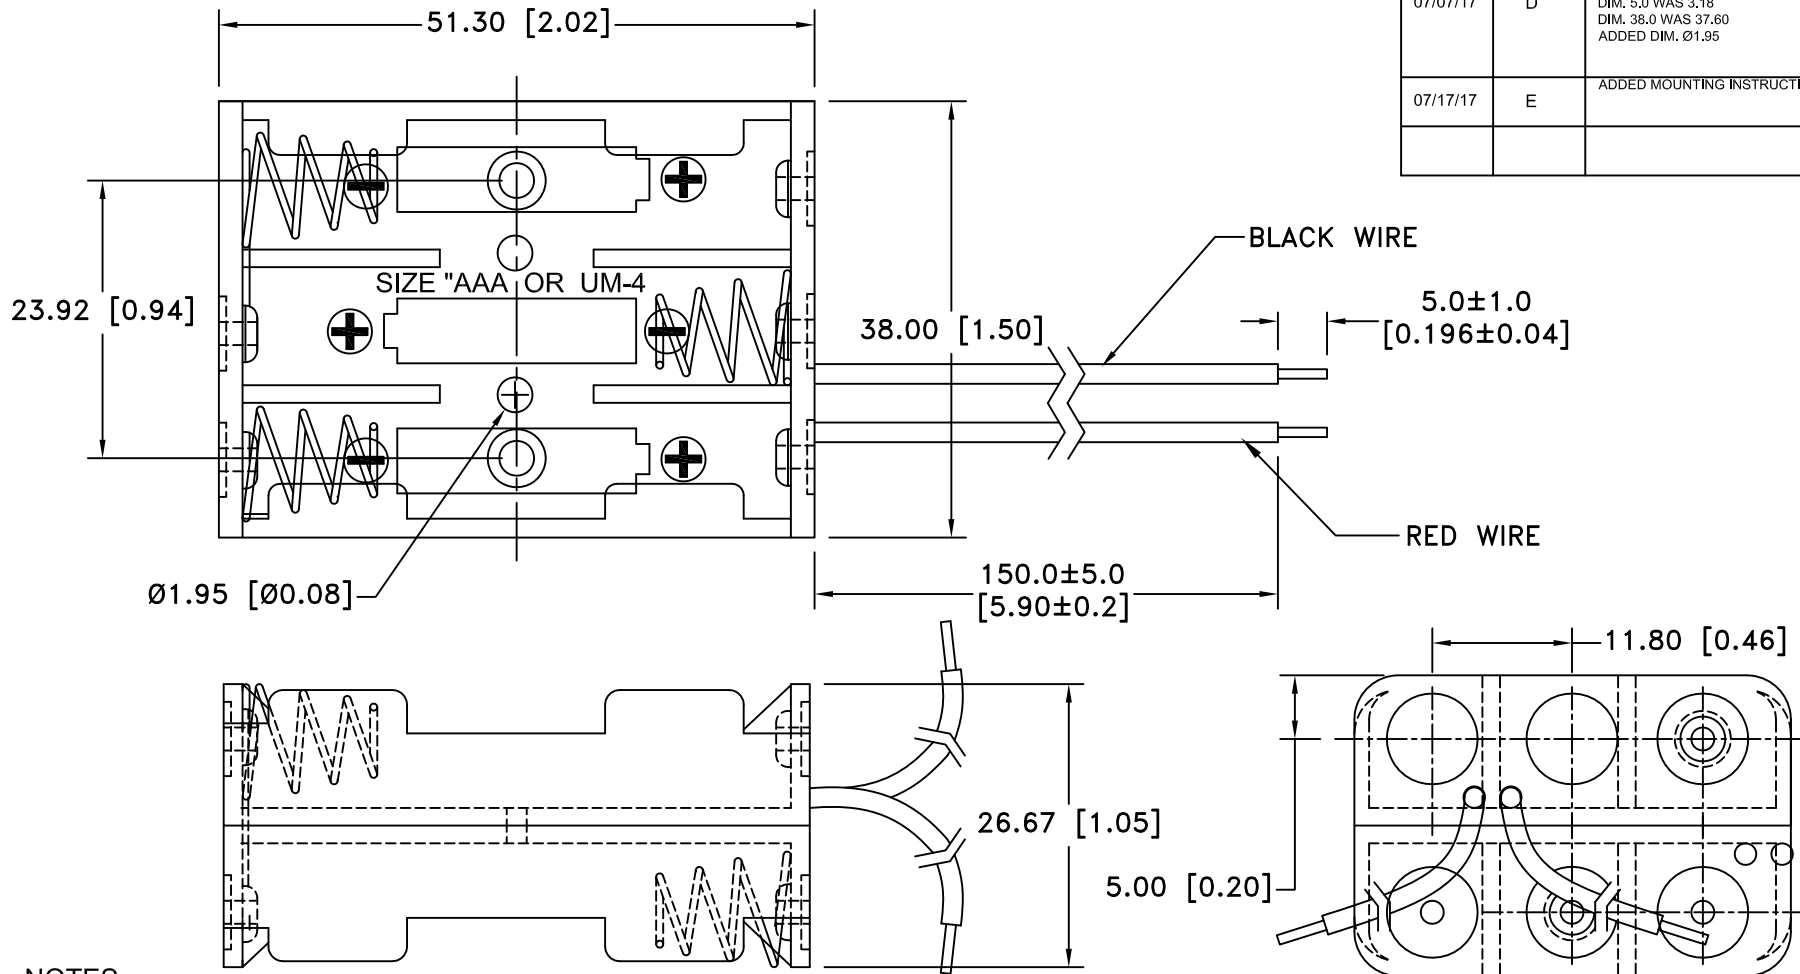


**NOTES:**

Plastic material - Polypropylene, Black  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Springs - Nickel Plated Spring Steel  
 Rivets - Brass, Nickel Plated  
 Wire: 26 awg, UL1007, CSA, TR64, 300V, 80°C  
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000  
 ROHS 2 COMPLIANT

**Mounting Instruction:**

Use 2-56 machine screws or eyelets 0.089" OD  
 by 0.15" flange stimpson GS-3 series or equivalent.  
 also adhesives and double sided tapes work well.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title SIX "AAA" CELL HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 07/17/17	Drawing Number BH26AAAW	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mpd](#) manufacturer:*

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)  
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)  
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)  
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)