


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/26/05	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
12/02/05	C	REMOVED "SOLDER DIPPED TAILS" FROM SPEC.	T.B.	B.S.	
6/13/14	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

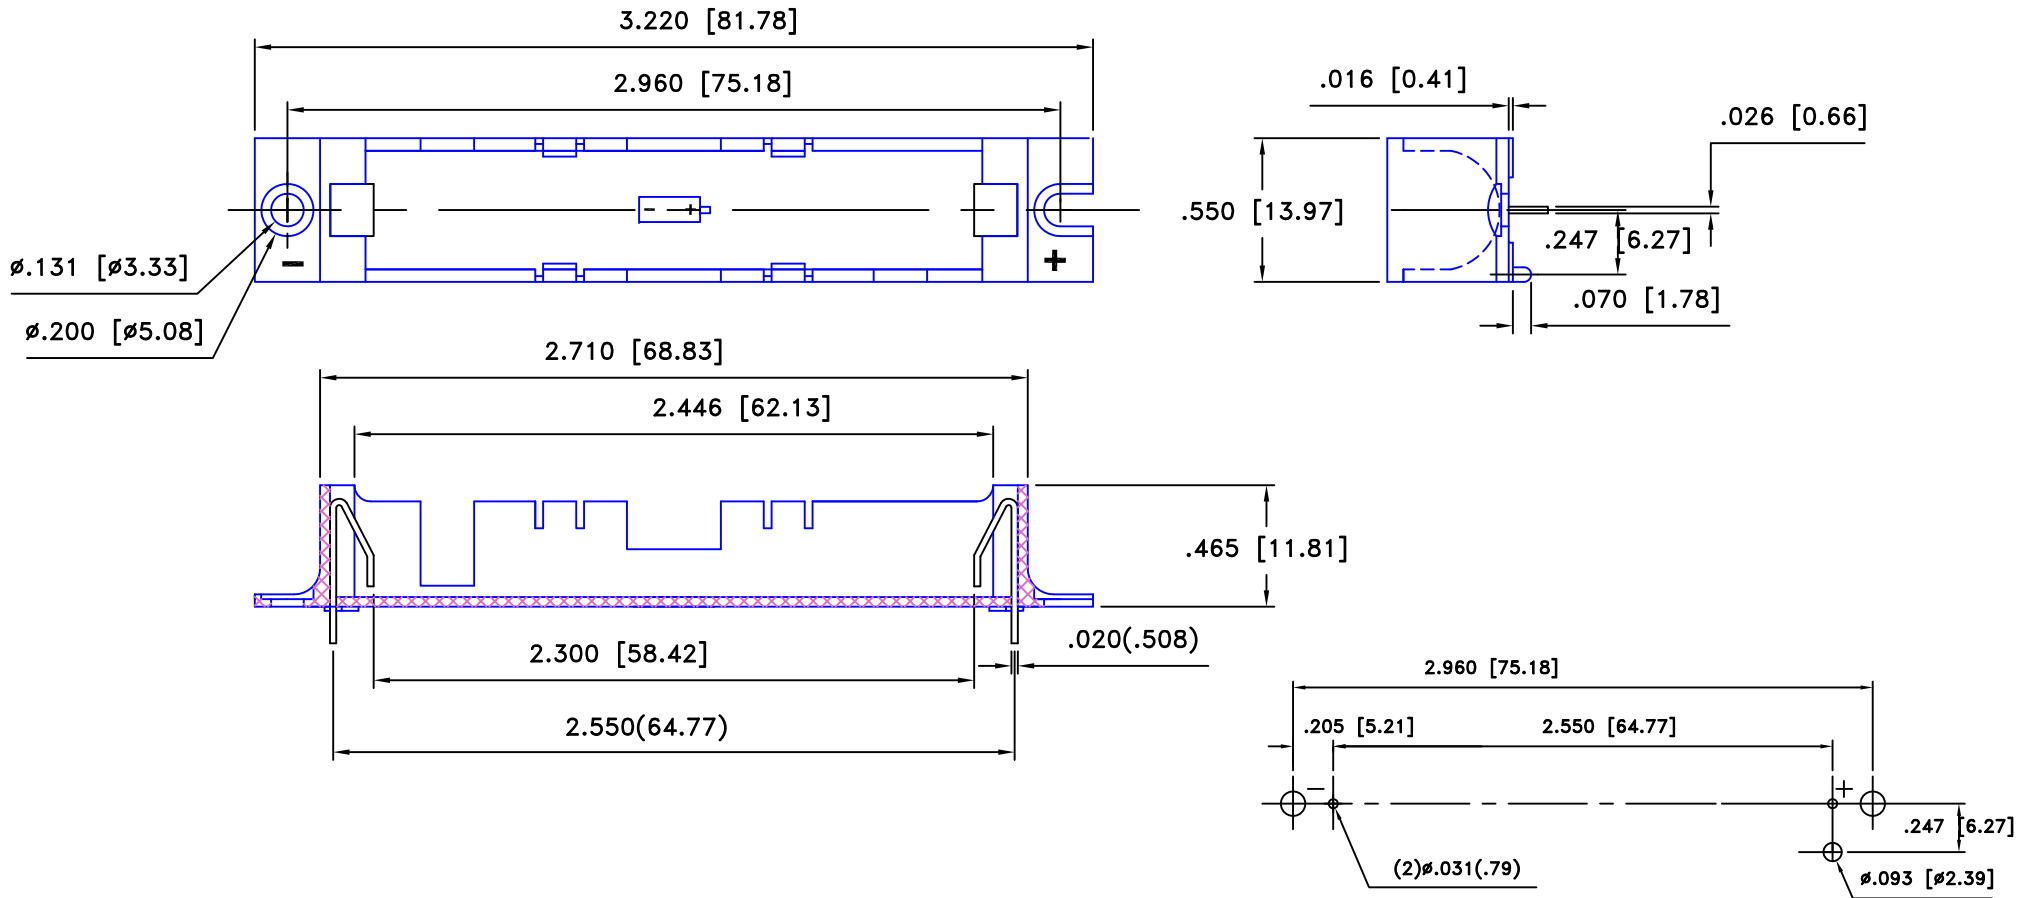


SPECIFICATION

HOLDER: SELF-EXTINGUISHING THERMOPLASTIC POLYESTER PBT, BLACK, UL94V-0
 CONTACTS: 301 - 304 SPRING TEMPER STAINLESS STEEL, NICKEL PLATED,

FLAMMABILITY RATING, 94V-0, FILE NO. E88499(M)
 DIELECTRIC STRENGTH: 560V/ MIL AT 25°C FOR 5 SEC.
 TEMPERATURE RANGE: -55°C TO +180°C
 RESISTANCE TO SOLVENTS: Xylene; Ethyl acetate; Butyl, Methyl & propyl alcohol;
 Refrigerants; Heptane; Toluene.

ROHS 2 COMPLIANT

PCB LAYOUT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale 2=1	Drawn By T.S. Approved By T.B.
Fractional ± .8 (.030)	Title BH-2N LITHIUM BATTERY HOLDER		
Angular ± 3°	Date 6/13/14	Drawing Number BH-2N	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)