


∽ RED WIRE

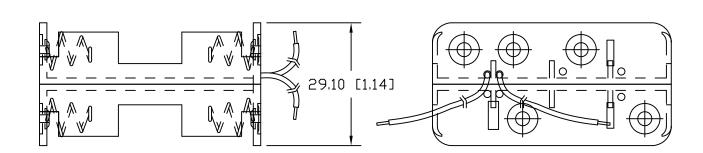

150.0±6.0 [5.90±0.20]

## MATERIAL:

HOUSING: POLYPROPYLENE

FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959

TEMPERATURE RANGE: -10°C to +100°C SPRINGS: SPRING STEEL, NICKEL PLATED WIRES: 26AWG, UL1007, CSA, TR64, 300V, 80°C

RIVETS: BRASS, NICKEL PLATED

CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS

PER EIA-540J000

1.5∨ □ 🕀

- 57.90 [2.28]

**ROHS 2 COMPLIANT** 

Tolerance (Inches)	MPD Memory Protection Devices, Inc				
	200 Broad Hollow Road, Farmingdale, New York 11735				
Decimal				Scale	Drawn By B.S.
±.5 (.020)					Approved By T.B.
Fractional	Title EIGHT "AA" BATTERY HOLDER WITH WIRE LEADS				
± .8 (.030)					
Angular	Date	Drawing Number			
± 3°	06/27/17		ВН	H48AAW	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for mpd manufacturer:

Other Similar products are found below:

AS212-L BH24AAAL BC4AAAPC ZA5075 BC4AAAL AP-130 BK-5021 ZA5070 BC3AAPC BH9VL APP-004 AP-133 BH2/3AC

413717H BC22AAL SBH421AS BH48DW AP-124 APP-001 BC-2013 BC3AAAPC AP-129 ZA5074-B BS4T-HD ZA5350 ZA5076

ABG-43 SBH441AS ZA1060 AP-131 BH-20H-1T BE-2AAAA-PC AS212 BH26AAL BC2AAAL BHX1-1225-PC BH2/3A-SM BS6T

BA2032 BH26DL BH1/2AA-3 ZA5036 BH2DL BC12AAL BH24AAAW BK-5091 BH24AASF BC3AAL BH9VW BK-5003