
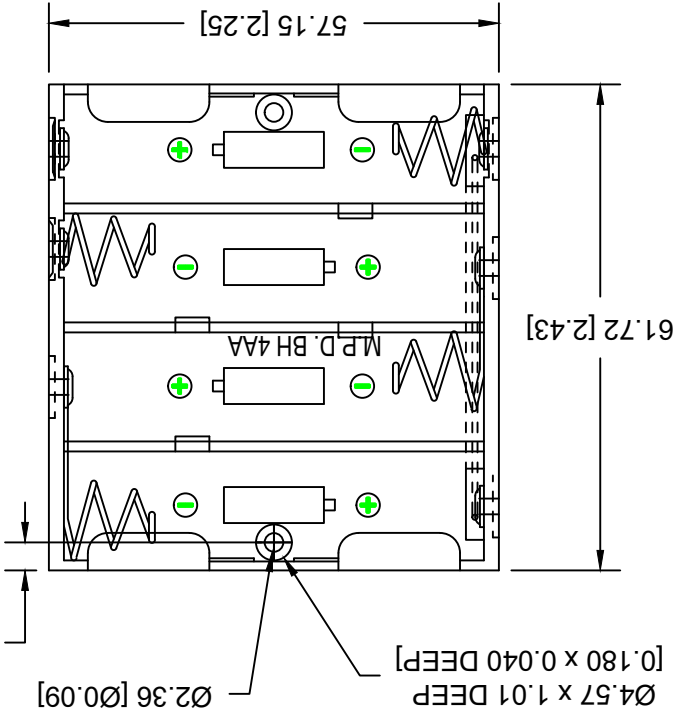


MOUNTING INSTRUCTION:
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

1. MATERIAL:
 HOUSING: HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E130155
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: 302 STAINLESS STEEL, NICKEL PLATED.
 TEMPERATURE RANGE: -40°C TO +140°C
 RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS
 ROHS COMPLIANT

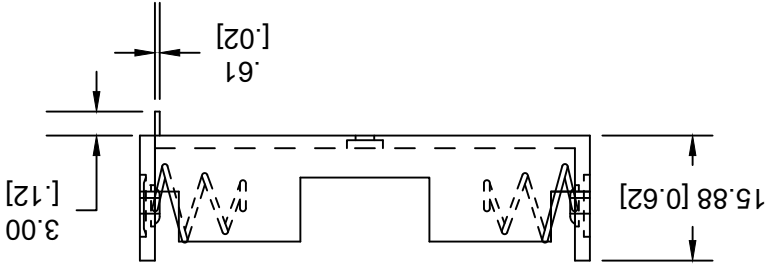

Tolerance (Inches)
 Decimal $\pm .5 (.020)$
 Fractional $\pm .8 (.030)$
 Angular $\pm 3^\circ$

Date 05/17/19

Drawing Number BH4AA-PC

Title

4AA BATTERY HOLDER WITH PC PINS

Scale


Drawn By B.S.

Approved By T.B.



MPD
 Memory Protection Devices, Inc
 200 Broad Hollow Road, Farmingdale, New York 11735



INTER CONNECTION SCHEMATIC

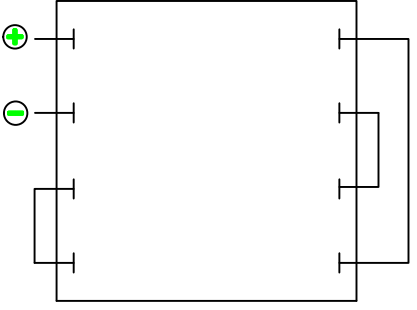

Pcb LAYOUT

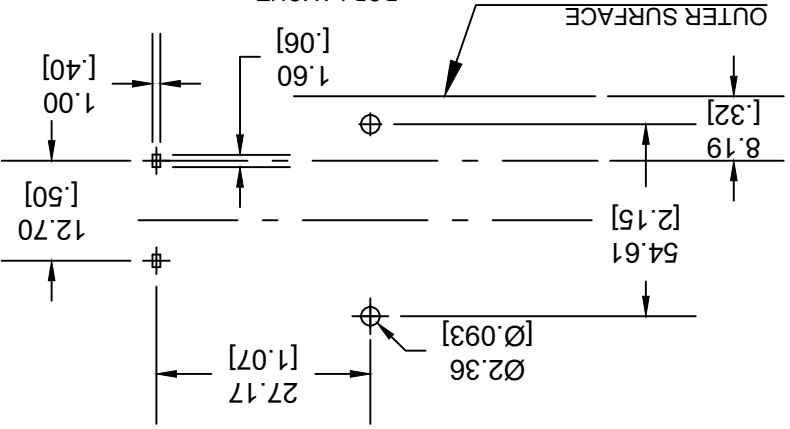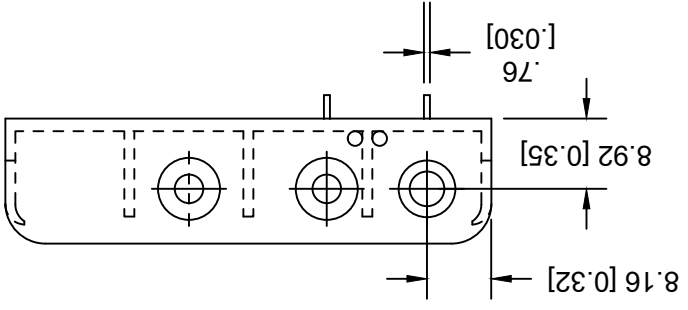

Date	SYM	REVISION RECORD	AUTH	DR. CK.
10/17/14	D	REDRAWN AND UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.
05/17/19	E	UL FILE NO. FOR MATERIAL CHANGED TO E130115	T.B.	B.S.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)