



- SPECIFICATIONS:
- * Holder material- LCP Zenite, Color off white, UL File No. E344082
 - * Contacts : Phosphor Bronze C5191, Gold Flash, 1u - 3u thickness
 - * Temperature range: -40°C to +280°C
 - * Vibration Test: 10-50-10 Hz swept in 60 seconds
X,Y,Z direction: 1 hour each direction
 - * Result: No dislodgement of the cell or damage
 - * Shock Test: Half sine wave acceleration 150G, 6 milliseconds
No discontinuity over 10 milliseconds
 - * Result: No evidence of physical damage
 - * Drop Test: 1meter - No dislodgement of cell
 - * Approximate weight: 0.76g
 - * ROHS Compliant

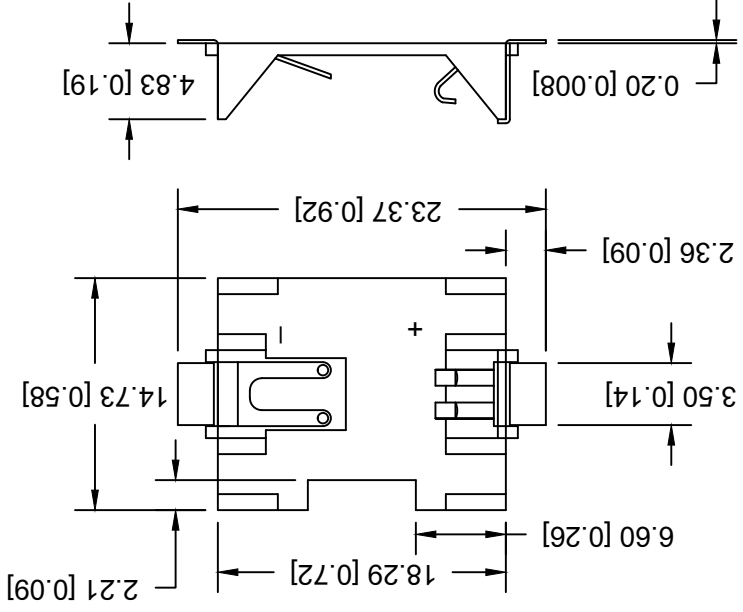

PCB LAYOUT

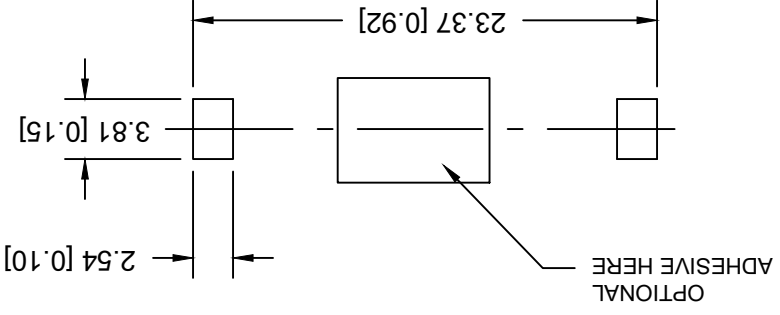

PATENT:9,192,059

Tolerance
[Inches]



Memory Protection Devices, Inc
200 Broad Hollow Road, Farmingdale, New York 11735

Decimal

Fractional
±.8 (.030)

Angular
± 3°

Date

10/31/19

Title

BASE, SURFACE MOUNT, CR1225 BATTERY

Scale

Drawn By B.S.

Approved By T.B.

Drawing Number

BHSD-1225-SM

Date

SYM

REVISION RECORD

AUTH DR. CK.

10/31/19

F

Added weight of the part

01/27/17

E

Updated UL File number

T.B.

B.S.

T.B.

B.S.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)