
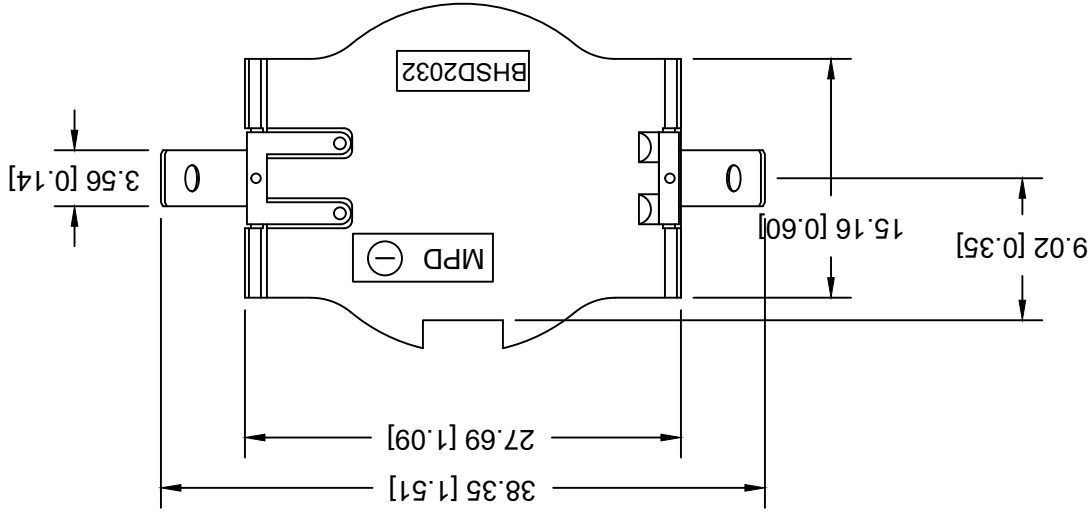



SPECIFICATIONS:

- * Holder material- LCP Vectra, Color white, UL File No. E174096
- * Contacts : Phosphor Bronze C5191, Gold Flash, 1u - 3u thickness
- * Temperature range: -40°C to +280°C
- * Vibration Test: 10-50-10 Hz swept in 60 seconds
- * X,Y,Z direction: 1 hour each direction
- * Result: No dislodgement of the cell or damage
- * No discontinuity over 10 micro-seconds
- * Shock Test: Half sine wave acceleration 150G, 6 m/s
- * 3 shock pulses each direction per axis, total of 18 pulses
- * Result: No evidence of physical damage
- * Drop Test: 1meter - No dislodgement of cell
- * ROHS Compliant

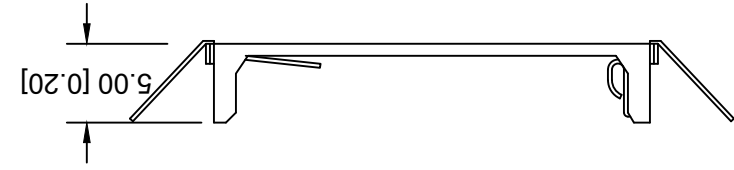

Weight: 1.16g

Tolerance [Inches]		 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735
Decimal	±.5 (.020)	
Fractional	± .8 (.030)	
Angular		± 3°
Date		10/24/19
Drawing Number		BHSD-2032-L

Title		CR2032 BATTERY HOLDER WITH SOLDER LUG	
Scale	Drawn By	B.S.	
	Approved By	T.B.	

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/27/18	C	Updated Positive contact design	T.B.	B.S.	
10/24/19	D	Added weight of the part	T.B.	B.S.	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)