


NEGATIVE MARKING
ON OPPOSITE SIDE

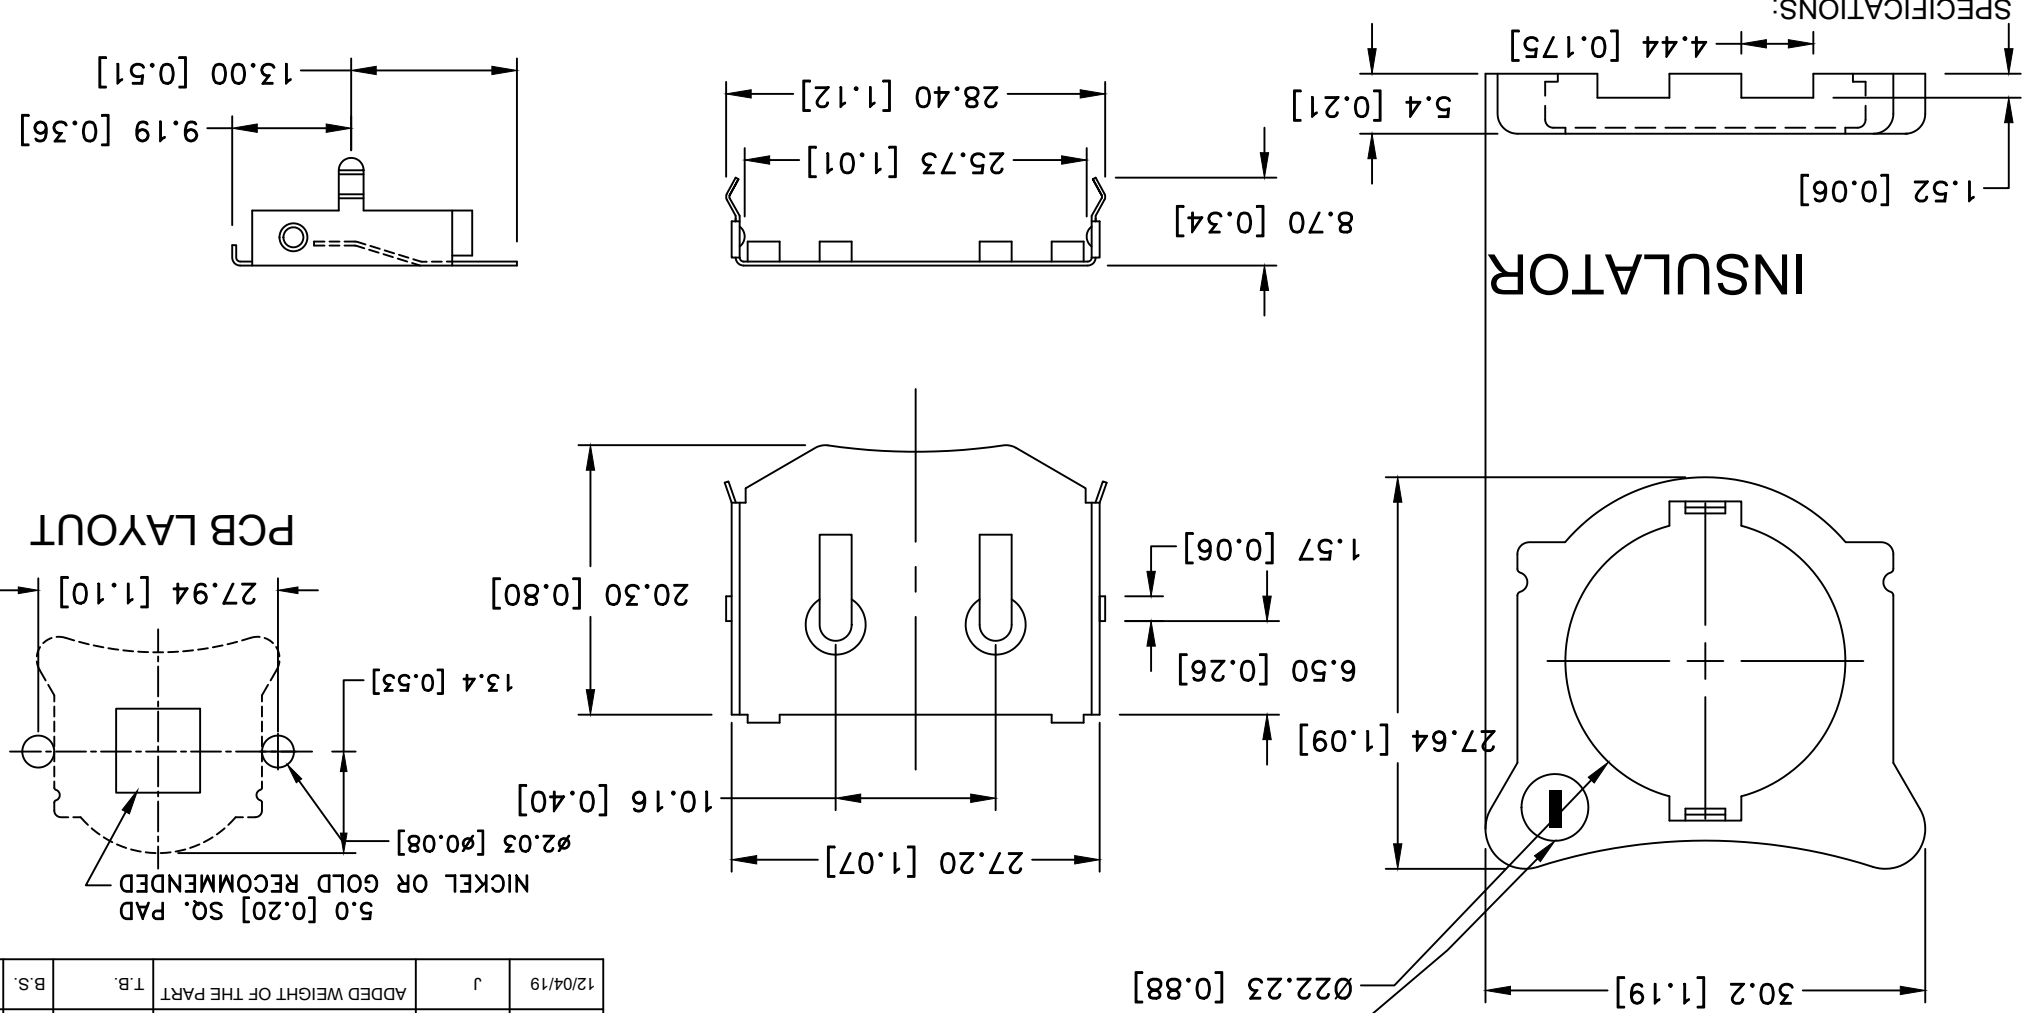

SPECIFICATIONS:

- * Holder material- Polypropylene, AV161 PP, Off White
- * UL Flammability Rating: UL 94-HB File No. E108370
- * Contacts : Phosphor Bronze C5191, Nickel Plated 80-150u thickness
- * Vibration test: 10-50-10 hz swepped in 60 seconds
- * x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
- * no discontinuity over 10 milliseconds
- * Shock test: half sine wave acceleration 150g.
- * 6 milliseconds 3 shock pulses each direction per axis,
- * total of 18 pulses
- * Result: no evidence of physical damage
- * Approximate weight: Retainer: 1.57g, Insulator: 0.54g
- * ROHS COMPLIANT

Tolerance (Except as noted)		Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	
decimal	±.5 (.020)	Scale	Drawn By B.S.
Fractional	±.8 (.030)	Approved By T.B.	
Angular	± 3°	Title CR2450 PC PINS BATTERY RETAINER WITH INSULATOR	
Date	12/04/19	Drawing Number BHX1-2450-PC	

Date	SYM	REVISION RECORD	AUTH	DR. CK.
12/11/15	G	CHANGED MICRO SEC. TO MILLISECONDS	T.B.	B.S.
09/10/19	H	CHANGED INSULATOR VIEW ADDED DIM. 1.52 AND 4.44	T.B.	B.S.
12/04/19	J	ADDED WEIGHT OF THE PART	T.B.	B.S.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)