

NOTES:
 1. MATERIAL:
 CONTACT PLATE: 0.45mm (0.018") THICK
 RIVETS: BRASS, NICKEL PLATED.
 SPRING: 1.02mm (0.04") THICK SPRING STEEL, NICKEL PLATED.
 ROHS COMPLIANT

Tolerance (Except as noted)	decimal ±.5 (.020)	Fractional ±.8 (.030)	Angular ± 3°
--------------------------------	-----------------------	--------------------------	-----------------



Memory Protection Devices, Inc
 200 Broad Hollow Road, Farmingdale, New York 11735

Scale


Drawn By B.S.

Approved By T.B.

Title
 NEGATIVE CONTACT FOR "D" CELL

Date
 03/26/19

Drawing Number
 BK-876

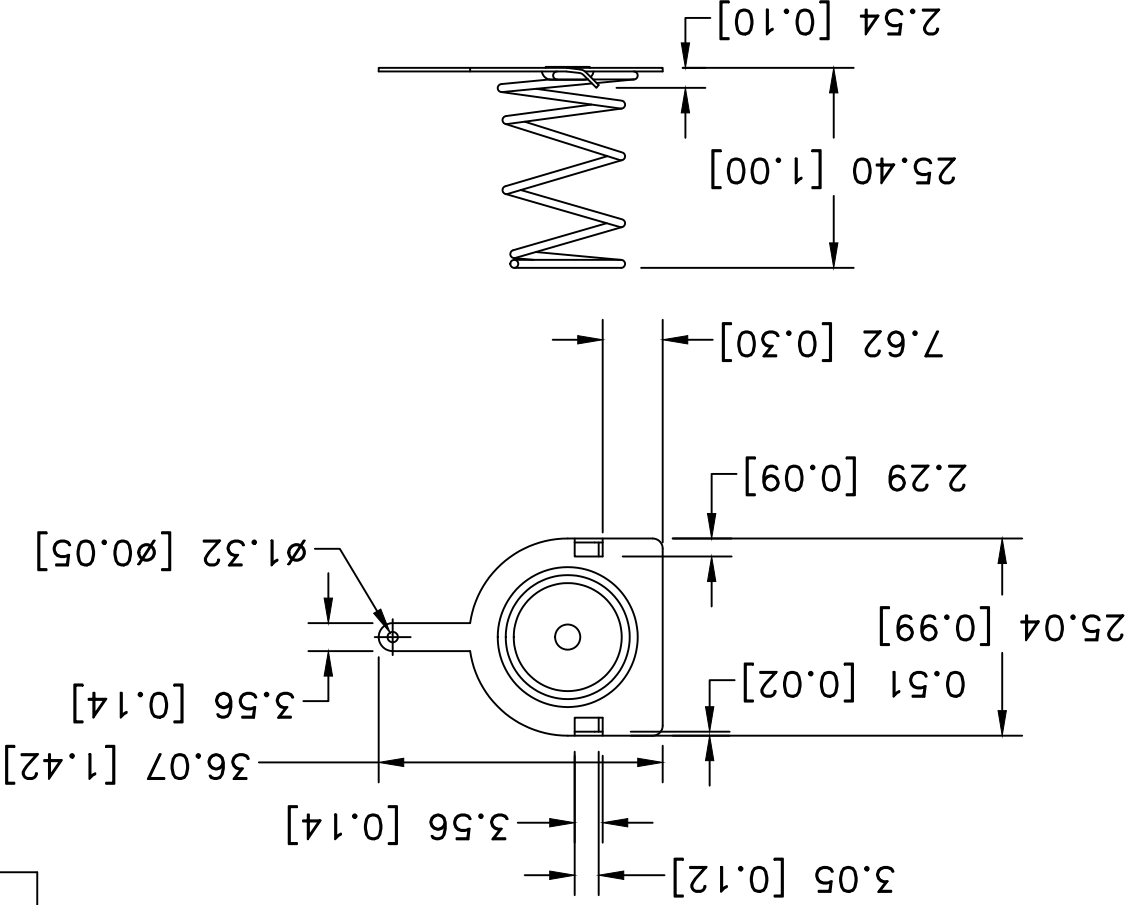

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/27/09	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
11/21/14	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
03/26/19	C	DIM. 3.56 WAS 5.46 DIM. 7.62 WAS 6.60 DIM. 2.29 WAS 1.78 DELETE DIM. 17.78	T.B.	B.S.	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)