

SPECIFICATION

- * Contact : Phosphor Bronze C5191, Nickel Plated 80-150u thickness
- * Vibration test: 10-50-10 hz swept in 60 seconds
- x,y,z direction: 1 hour each direction
- * Result: no dislodgement of the cell or damage
- * no discontinuity over 10 micro-seconds
- * Shock test: half sine wave acceleration 150g.
- 6 milli-seconds 3 shock pulses each direction per axis,
- total of 18 pulses
- * Result: no evidence of physical damage
- * ROHS COMPLIANT

Insulator Tray P/N BRX1-0003

Tolerance
(Except as noted)



Memory Protection Devices, Inc
200 Broad Hollow Road, Farmingdale, New York 11735

Weight: 0.55g

decimal

±.5 (.020)

Fractional
±.8 (.030)

Angular
± 3°

Date
10/24/19



Drawing Number
BRX1-2032-SM

Approved By T.B.


Scale
Drawn By B.S.

Title
CR2032 SURFACE MOUNT BATTERY RETAINER

Date	SYM	REVISION RECORD	AUTH	DR. CK.
06/16/17	C	ADDED INSULATOR PART NUMBER	T.B.	B.S.
10/24/19	D	ADDED WEIGHT OF THE PART	T.B.	B.S.

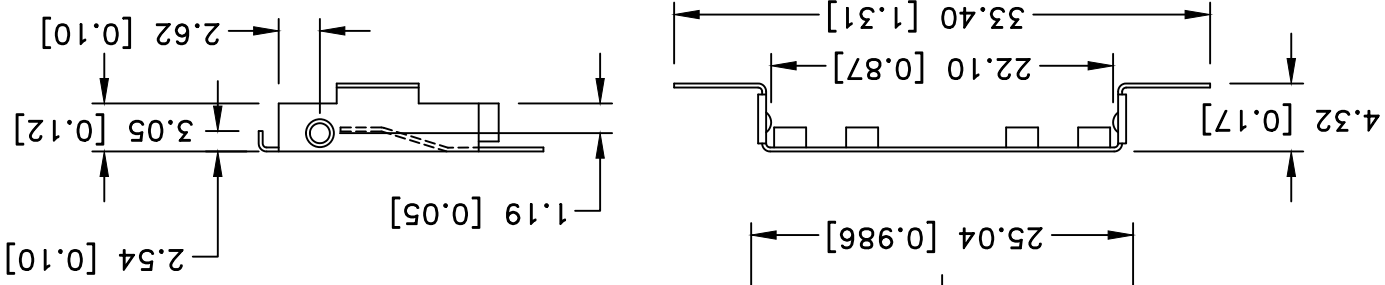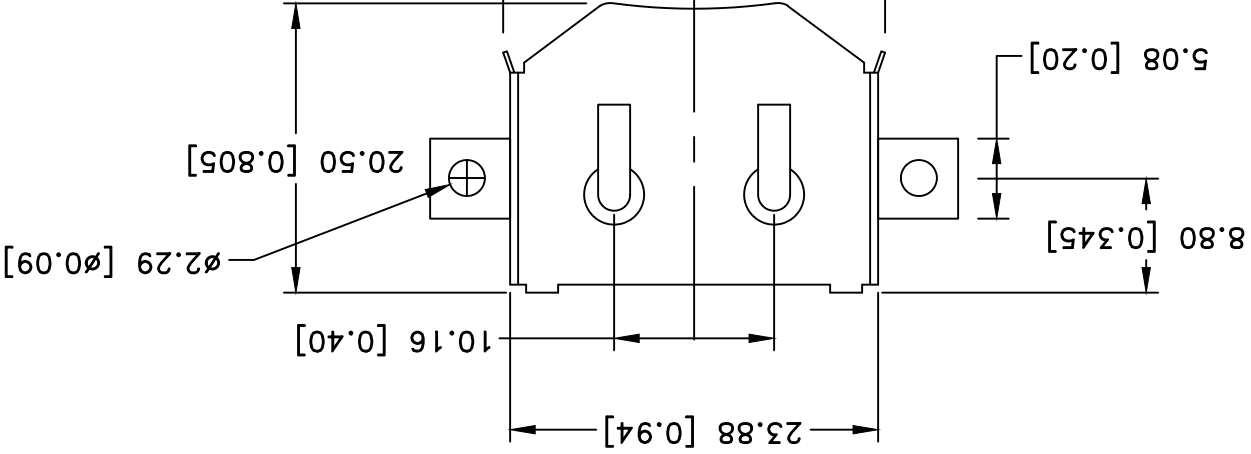

PCB LAYOUT

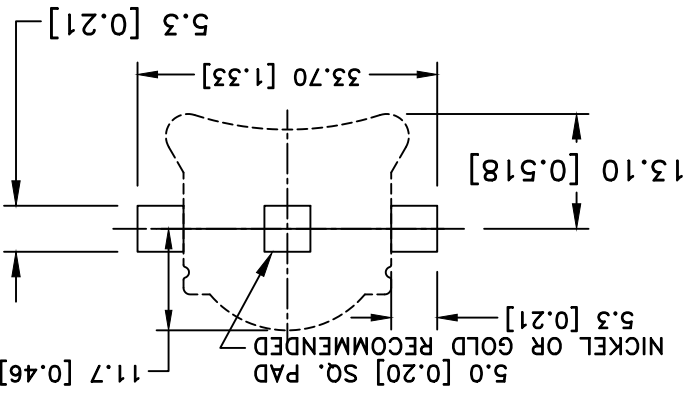

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [mpd](#) manufacturer:

Other Similar products are found below :

[AS212-L](#) [BH24AAAL](#) [BC4AAAPC](#) [ZA5075](#) [BC4AAAL](#) [AP-130](#) [BK-5021](#) [ZA5070](#) [BC3AAPC](#) [BH9VL](#) [APP-004](#) [AP-133](#) [BH2/3AC](#)
[413717H](#) [BC22AAL](#) [SBH421AS](#) [BH48DW](#) [AP-124](#) [APP-001](#) [BC-2013](#) [BC3AAAPC](#) [AP-129](#) [ZA5074-B](#) [BS4T-HD](#) [ZA5350](#) [ZA5076](#)
[ABG-43](#) [SBH441AS](#) [ZA1060](#) [AP-131](#) [BH-20H-1T](#) [BE-2AAAA-PC](#) [AS212](#) [BH26AAL](#) [BC2AAAL](#) [BHX1-1225-PC](#) [BH2/3A-SM](#) [BS6T](#)
[BA2032](#) [BH26DL](#) [BH1/2AA-3](#) [ZA5036](#) [BH2DL](#) [BC12AAL](#) [BH24AAAW](#) [BK-5091](#) [BH24AASF](#) [BC3AAL](#) [BH9VW](#) [BK-5003](#)