

# MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

## MBRS360BT3G(MS)

Product specification



## FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:  
260°C/10 seconds at terminals
- Compliant to RoHS 2.0

## Mechanical data

- **Case:** JEDEC DO-214AA molded plastic body
- **Terminals:** Solder plated, solderable per MIL-STD-750, Method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any

## Reference News

| Outline  | Marking   |
|--|---|
|  |  |
| SMB  |   |

## Maximum ratings and Electrical Characteristics(AT T=25°C unless otherwise noted)

| Rating   | Symbol      | Value         | Unit |
|--|-------------|---------------|------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                     | $V_{RRM}$   | 60            | V    |
| Average Rectified Forward Current  | $I_{F(AV)}$ | 3.0 @TL=137°C | A    |
| Nonrepetitive Peak Surge Current<br>(Surge applied at rated load conditions halfwave, single phase, 60 Hz) | $I_{FSM}$   | 125           | A    |
| Storage Temperature Range  | $T_{stg}$   | -65 to +175   | °C   |
| Operating Junction Temperature (Note 1)  | $T_J$       | -65 to +175   | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. The heat generated must be less than the thermal conductivity from Junction-to-Ambient:  $dP_D/dT_J < 1/R_{\theta JA}$ .

## THERMAL CHARACTERISTICS

| Characteristic   | Symbol          | Value | Unit |
|--|-----------------|-------|------|
| Thermal Resistance, Junction-to-Lead (Note 2)<br>SMB   | $R_{\theta JL}$ | 15    | °C/W |
| Thermal Resistance Junction-to-Ambient (Note 2)<br>SMB | $R_{\theta JA}$ | 145   | °C/W |
| Thermal Resistance Junction-to-Ambient (Note 3)<br>SMB | $R_{\theta JA}$ | 73    | °C/W |


## ELECTRICAL CHARACTERISTICS

|   |       |             |    |
|---|-------|-------------|----|
| Maximum Instantaneous Forward Voltage (Note 5)<br>( $I_F=3.0$ A, $T_J=25^\circ\text{C}$ )   | $V_F$ | 0.63        | V  |
| Maximum Instantaneous Reverse Current (Note 5)<br>(Rated dc Voltage, $T_J=25^\circ\text{C}$ )<br>(Rated dc Voltage, $T_J=100^\circ\text{C}$ ) | $i_R$ | 0.03<br>3.0 | mA |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Mounted with minimum recommended pad size, PC Board FR4.
3. 1 inch square pad size (1 x 0.5 inch for each lead) on FR4 board.
4. Typical Value; 1 inch square pad size (1 x 0.5 inch for each lead) on FR4 board.
5. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .


**Rating and characteristic curves**

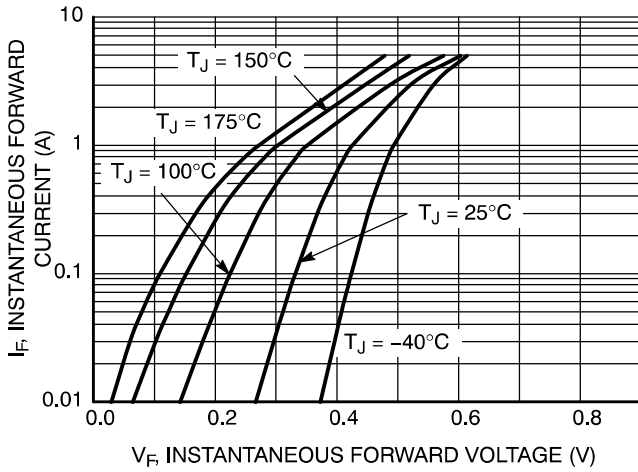


**Figure 1. Typical Forward Voltage**

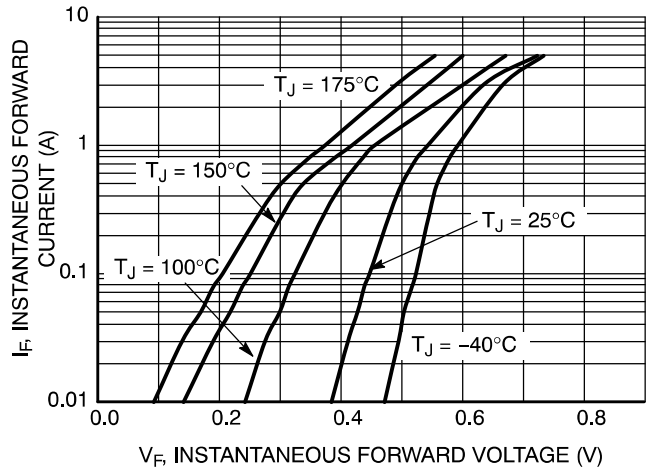


**Figure 2. Maximum Forward Voltage**

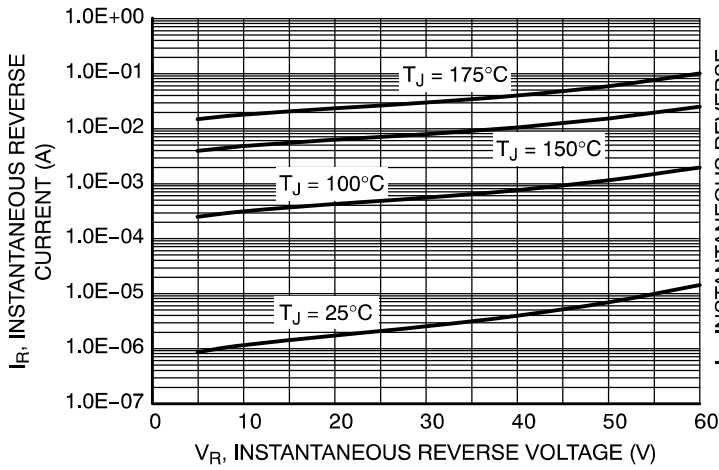


**Figure 3. Typical Reverse Current**

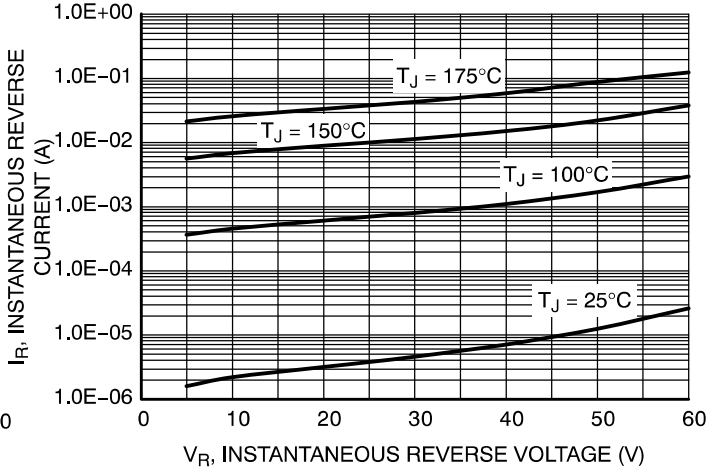

**Figure 4. Maximum Reverse Current**

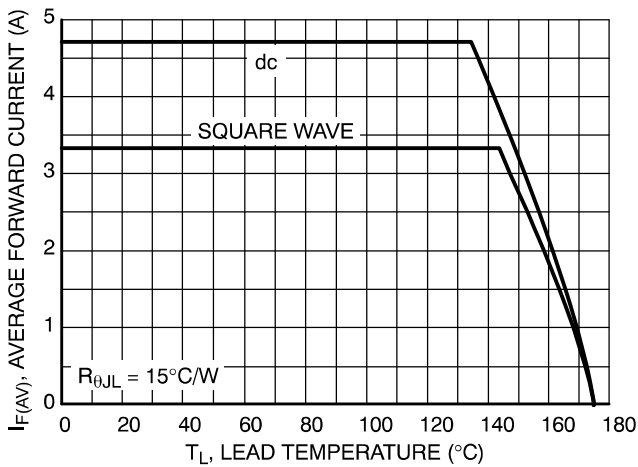


**Figure 5. Current Derating**

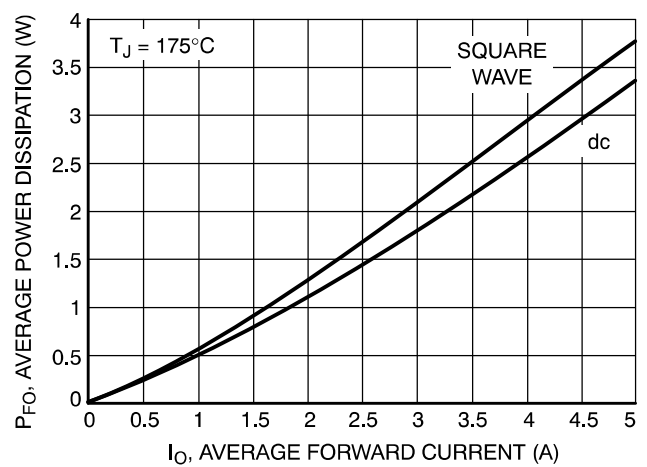


**Figure 6. Forward Power Dissipation**

**PACKAGE MECHANICAL DATA**

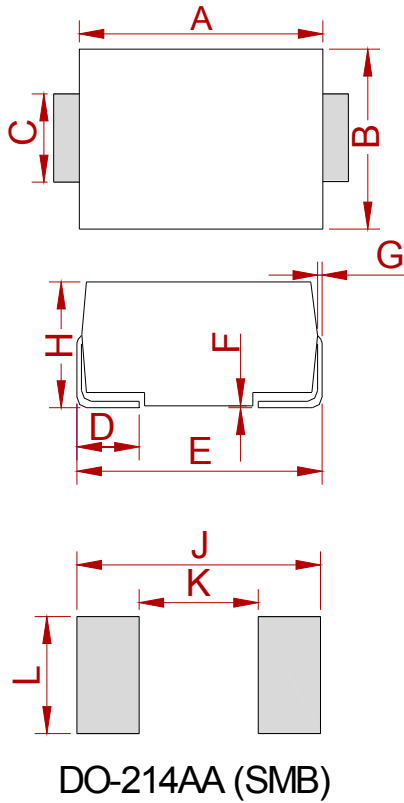

| Ref. | Dimensions  |       |        |       |
|------|-------------|-------|--------|-------|
|      | Millimeters |       | Inches |       |
|      | Min.        | Max.  | Min.   | Max.  |
| A    | 4.25        | 4.75  | 0.167  | 0.187 |
| B    | 3.30        | 3.94  | 0.130  | 0.155 |
| C    | 1.85        | 2.21  | 0.073  | 0.087 |
| D    | 0.76        | 1.52  | 0.030  | 0.060 |
| E    | 5.08        | 5.59  | 0.200  | 0.220 |
| F    | 0.051       | 0.203 | 0.002  | 0.008 |
| G    | 0.15        | 0.31  | 0.006  | 0.012 |
| H    | 2.11        | 2.44  | 0.083  | 0.096 |
| J    | 6.80        |       | 0.270  |       |
| K    |             | 2.60  |        | 0.100 |
| L    | 2.40        |       | 0.090  |       |

**Suggested solder pad layout**

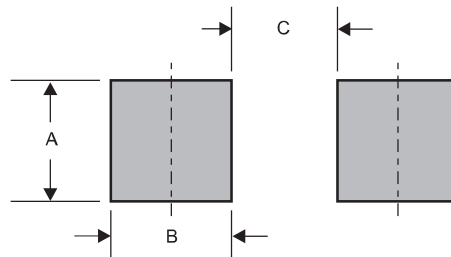

Dimensions in inches and (millimeters)

| PACKAGE | A            | B            | C            |
|---------|--------------|--------------|--------------|
| SMB     | 0.078 (2.00) | 0.059 (1.50) | 0.110 (2.80) |

**REEL SPECIFICATION**

| P/N             | PKG | QTY  |
|-----------------|-----|------|
| MBRS360BT3G(MS) | SMB | 3000 |

## Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [MSKSEMI](#) manufacturer:*

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#)  
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBRA140TRPBF](#)  
[MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#)  
[NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)  
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#) [PDS1040Q-13](#) [B160BQ-13-F](#)  
[SDM05U20CSP-7](#) [BAS 70-07 E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#) [HSM190Je3/TR13](#) [B330AF-13](#)  
[ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#) [DMF2822-000](#)