



MSKSEMI

SEMICONDUCTOR

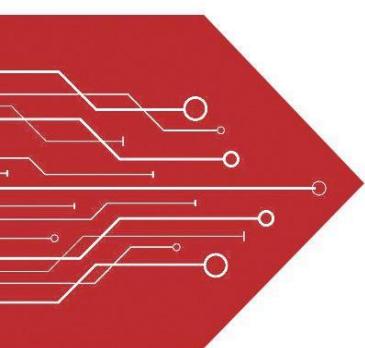


ESD



TVS



TSS



MOV



GDT




PLED

Product data sheet
Block diagram sheet

FEATURES

- Extremely small surface mounting type. (SOD882).
- Low VF.
- High reliability.
- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.



SOD-882




MAXIMUM RATINGS(T_a = 25°C)

| Parameter | Symbol | Limits | Unit |
|--|------------------|----------|------|
| Reverse voltage (DC) | VR | 30 | V |
| Average rectified forward current | IO | 200 | mA |
| Forward current surge peak (60Hz • 1cyc) | IFSM | 500 | |
| Junction temperature | T _j | 125 | °C |
| Storage temperature | T _{stg} | -40~+125 | |


ELECTRICAL CHARACTERISTICS (T_a= 25°C)

| Characteristic | Symbol | Min. | Typ. | Max. | Unit |
|--------------------------------|--------|------|------|------|------|
| Forward voltage (IF =200mA) | VF | - | - | 0.5 | V |
| (IF =100mA) | | - | - | 0.4 | |
| (IF =20mA) | | - | - | 0.38 | |
| (IF =10mA) | | - | - | 0.35 | |
| Reverse current (VR =10V) | IR | - | - | 30 | µA |

ELECTRICAL CHARACTERISTICS CURVES

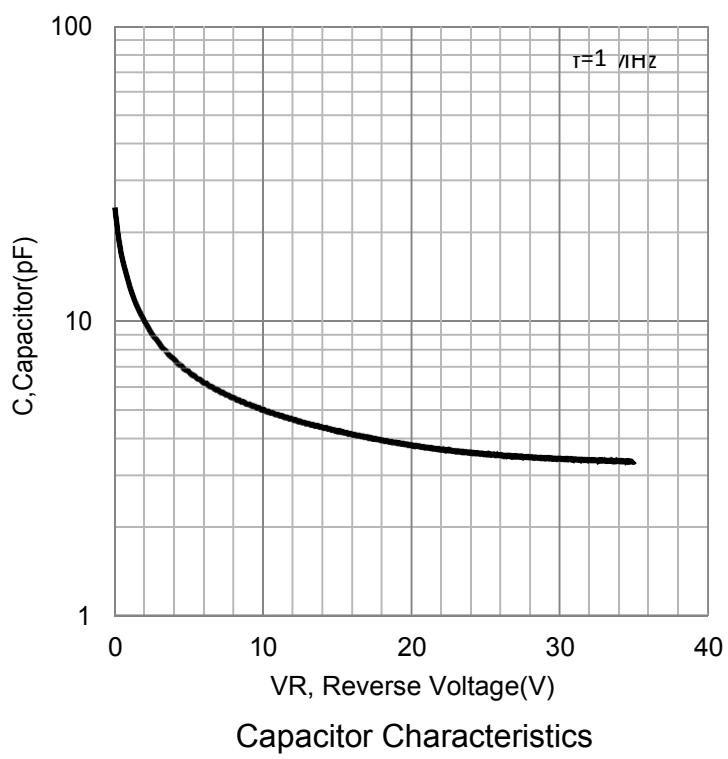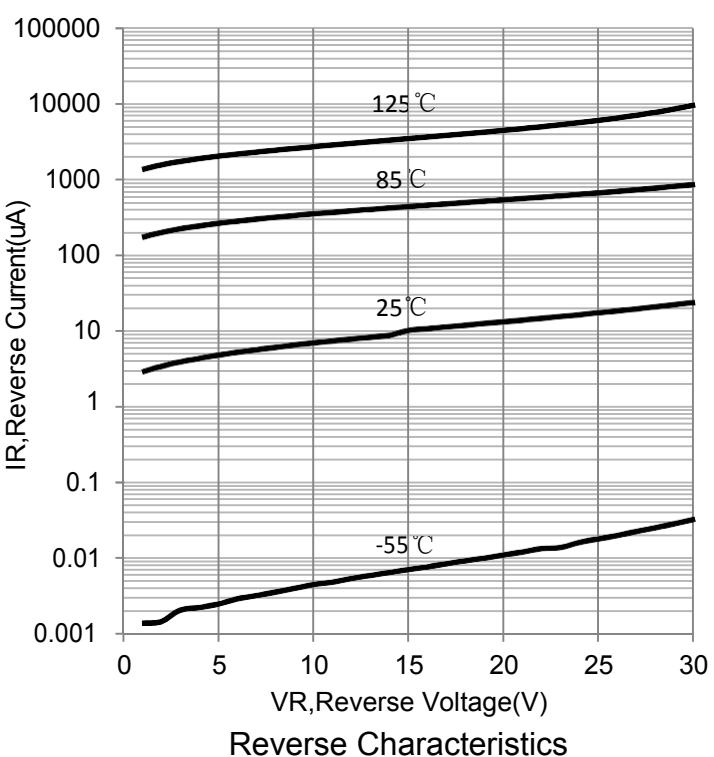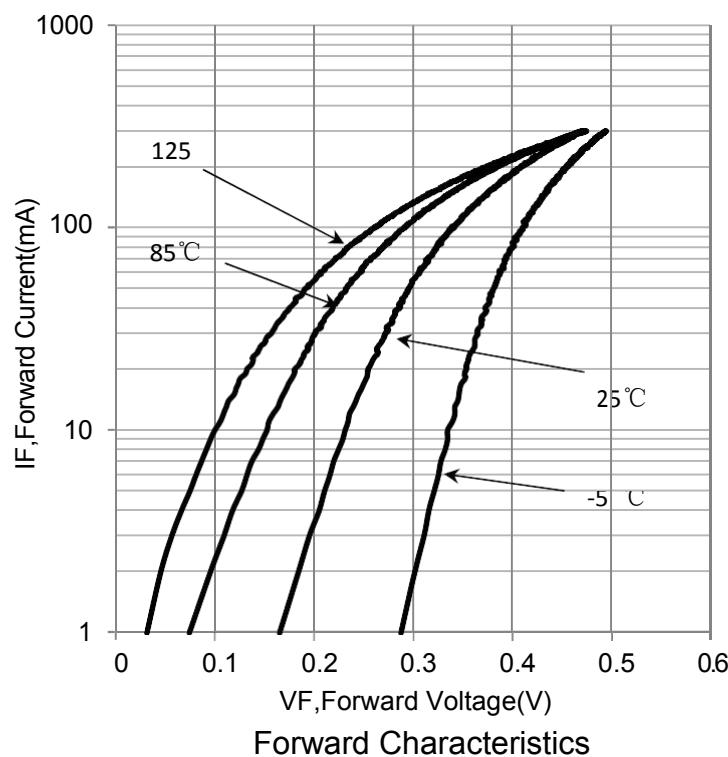


PACKAGE MECHANICAL DATA

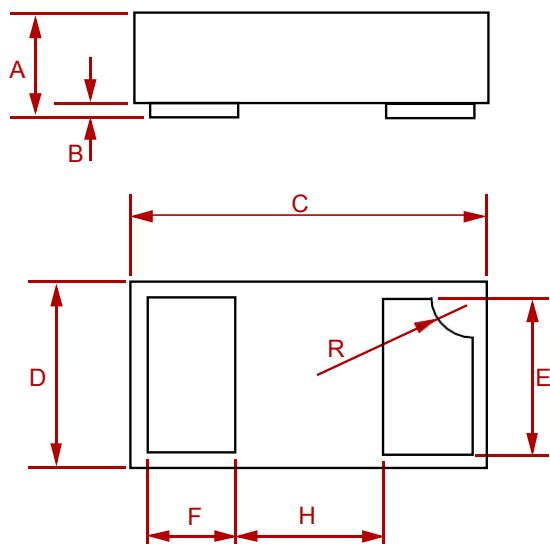

| Dim | Inches | | Millimeters | |
|-----|-----------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.0125 | 0.02 | 0.32 | 0.52 |
| B | 0.000 | 0.002 | 0.00 | 0.05 |
| C | 0.037 | 0.043 | 0.95 | 1.080 |
| D | 0.022 | 0.027 | 0.55 | 0.680 |
| E | 0.016 | 0.024 | 0.40 | 0.60 |
| F | 0.008 | 0.012 | 0.20 | 0.30 |
| H | 0.015Typ. | | 0.40Typ. | |
| R | 0.001 | 0.005 | 0.05 | 0.15 |

Suggested Pad Layout

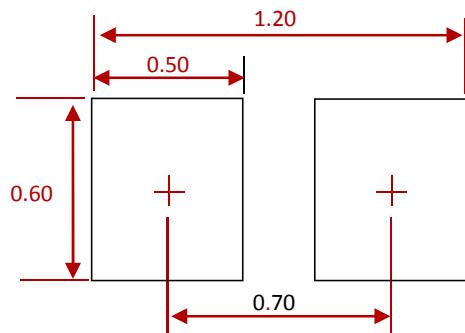

NOTES:

1. CONTROLLING DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES).
2. THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY.
CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR
COMPANY'S MANUFACTURING GUIDELINES ARE MET.

REEL SPECIFICATION

| P/N | PKG | QTY |
|---------------|---------|-------|
| RB521BS-30-MS | SOD-882 | 10000 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by MSKSEMI manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SBS818-TL-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [SS0503SH-TL-E](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#)
[ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#)
[10BQ060-M3/5BT](#) [NRVB130LSFT1G](#) [CRS08TE85LQM](#)