



# Product data sheet

www.msksemi.com





SOD-523



## **SD103AX** SCHOTTKY BARRIER DIODE

#### FEATURES

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Low Reverse Recovery Time
- Low Reverse Capacitance

#### MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted )


Symbol	Parameter	Value	Unit		
V <sub>RRM</sub>	Peak Repetitive Reverse Voltage				
V <sub>RWM</sub>	Working Peak Reverse Voltage	40	V		
V <sub>R</sub>	DC Blocking Voltage				
V <sub>R(RMS)</sub>	RMS Reverse Voltage	28	V		
I <sub>FM</sub>	Forward Continuous Current	350	mA		
I <sub>FSM</sub>	Non-Repetitive Peak Forward Surge Current@t=8.3ms	2	А		
PD	Power Dissipation	150	mW		
R <sub>OJA</sub>	Thermal Resistance From Junction To Ambient	667	°C/W		
Tj	Junction Temperature	125	°C		
T <sub>stg</sub>	Storage Temperature	-55~+150	°C		

#### ELECTRICAL CHARACTERISTICS(T<sub>a</sub>=25℃ unless otherwise specified)


Parameter	Symbol	Test conditions	Min	Тур	Max	Unit	
Reverse voltage	V <sub>(BR)</sub>	I <sub>R</sub> =100μA	40			V	
	I <sub>R</sub>	V <sub>R</sub> =30V			5		
Reverse current		V <sub>R</sub> =20V			2	μA	
		V <sub>R</sub> =10V			1		
		I <sub>F</sub> =1mA		0.27		- V	
		I <sub>F</sub> =5mA		0.32			
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =20mA			0.37	v	
		I <sub>F</sub> =200mA			0.6		
Total capacitance	C <sub>tot</sub>	V <sub>R</sub> =0V,f=1MHz		50		pF	
Reverse recovery time	t <sub>rr</sub>	$I_{F}=I_{R}=200$ mA, $I_{rr}=0.1 \times I_{R}$ , $R_{L}=100\Omega$		10		ns	






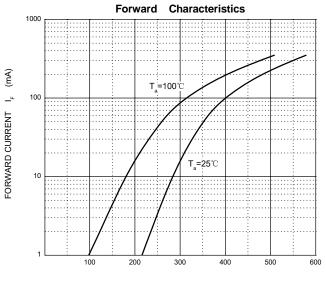




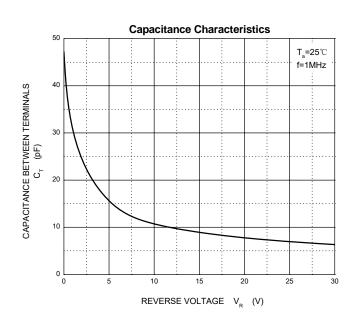

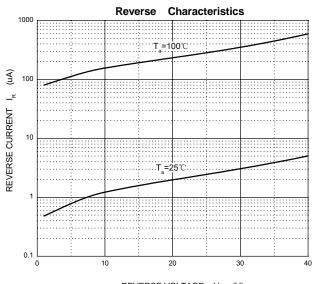




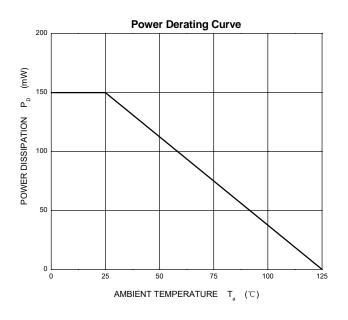







#### PACKAGE MECHANICAL DATA








Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min	Max	Min	Max	
A	0.510	0.770	0.020	0.031	
A1	0.500	0.700	0.020	0.028	
b	0.250	0.350	0.010	0.014	
С	0.080	0.150	0.003	0.006	
D	0.750	0.850	0.030	0.033	
E	1.100	1.300	0.043	0.051	
E1	1.500	1.700	0.059	0.067	
E2	0.200 REF		800.0	REF	
L	0.010	0.070	0.001	0.003	
θ	7° REF		7° F	REF	

### Suggested Pad Layout



Note: 1.Controlling dimension:in millimeters. 2.General tolerance:± 0.05mm.
3.The pad layout is for reference purposes only.

#### **REEL SPECIFICATION**

	P/N	PKG	QTY
:	SD103AX	SOD-523	3000





## <u>Attention</u>

■ Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.

■ MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications f any and all MSKSEMI Semiconductor products described orcontained herein.

■ Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ MSKSEMI Semiconductor. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with someprobability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits anderror prevention circuits for safedesign, redundant design, and structural design.

■ In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from theauthorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. Whendesigning equipment, referto the "Delivery Specification" for the MSKSEMI Semiconductor productthat you intend to use.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by MSKSEMI manufacturer:

Other Similar products are found below :

MA4E2039 MA4E2508M-1112 MBR1545CT MMBD301M3T5G RB160M-50TR D83C BAS16E6433HTMA1 BAT 54-02LRH E6327 NRVBAF360T3G NSR05F40QNXT5G NTE555 JANS1N6640 SK310-T SK34B-TP SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRA140TRPBF MBRB30H30CT-1G BAT 15-04R E6152 JANTX1N5712-1 DMJ3940-000 SB007-03C-TB-E SK33B-TP NRVBB20100CTT4G NRVBM120LT1G NTSB30U100CT-1G VS-6CWQ10FNHM3 CRG04(T5L,TEMQ) ACDBA1100LR-HF ACDBA1200-HF ACDBA240-HF ACDBA3100-HF CDBQC0530L-HF CDBQC0240LR-HF ACDBA260LR-HF ACDBA1100-HF MA4E2502L-1246 10BQ015-M3/5BT NRVBM120ET1G CRS08TE85LQM PMAD1108-LF B120Q-13-F 1N5819T-G B0530WSQ-7-F PDS1040Q-13 B160BQ-13-F SDM05U20CSP-7 B140S1F-7