




Clinched	vargion	availa	hla

GENERAL DESCRIPTION	N
Breaking capacity	2000 A
Voltage rating	32 V
Ambient temp. + overheating	-40 °C to +125 °C
Body material	PA66-GF25
Blade material	Copper
Blade coating	Tin plated
Rivets material	Copper
Mounting screw	M6
Tightening torque	9±1 Nm
Vibration class compliant with	ISO 16750-3 Test IV
Compliant with	ISO 8820-5 (except for dimensions) REACH, RoHS

OVERALL DIMENSIONS

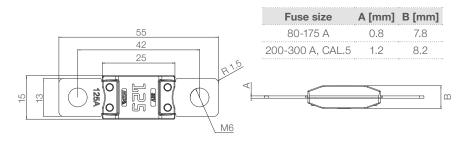


RATINGS

Size [A]	Color coding	Expected voltage drop [mV]	ISO cable size [mm²]	l²t* [A²s]	Average cold resistance** [mΩ]
80	Red	100	10	32000	0.7
100	Yellow	100	10	48000	0.5
125	Green	100	16	108000	0.4
150	Orange	100	25	157400	0.4
175	☐☐ White	100	25	232000	0.3
200	Blue	90	35	292000	0.3
225	Beige	100	35	404000	0.2
250	Pink	80	50	513400	0.2
300	Grey	53	50	749400	0.2
CAL.5	■■ Black	20	35	1161000	0.1

^{*}Calculated from breaking capacity test.

RERATING CURVE



MELTING TIME AND CURVE

Operating time limits:


% IR	Min [s]	Max [s]
75	14400*	-
100	14400**	-
135**	120	1800
200	1	15
350	0.3 (0.5*)	5
600	0.1	1

*Applicable for 300 A. **Non-applicable for 300 A.

CAL.5

I [A]	Min [s]	Max [s]
800	6	20
900	2	7
1000	1	4
1200	0.8	3
1400	0.7	0.9

Melting time graph at 23°C on test module ISO.



^{**}At ambient temperature = 23 ± 1 °C, injection time = 0.5 sec.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Fuses category:

Click to view products by MTA manufacturer:

Other Similar products are found below:

HBO-10 HBO-100 HBO-150 HBO-25 HBO-40 HBO-50 AFX-150 AT-10 AT-30 AT-5 ATM-4LP ACL-30 ACL-50 AFX-50 HBO-15 HBO-70 AT-20 AT-25 AT-3 142.7010.5502 BK-HBH-I BK-AGX-1-2 142.0020.6152 FMM-15 0695030.PXPS 0695040.PXPS 0297003.WXT 0695025.PXPS 0695015.PXPS 0200300 02400106P 0297002.WXT 0297004.WXT 0297010.WXT 0297015.WXT 0297020.WXT 0297025.WXT 0297030.WXT 0297030.WXT 029707.5WXT 0602930 0602935 0602940 0602950 0602960 0611100 0611125 0611150 0611175 0611200 0611225