


BU-P2451
(BNC Female Panel Receptacle)

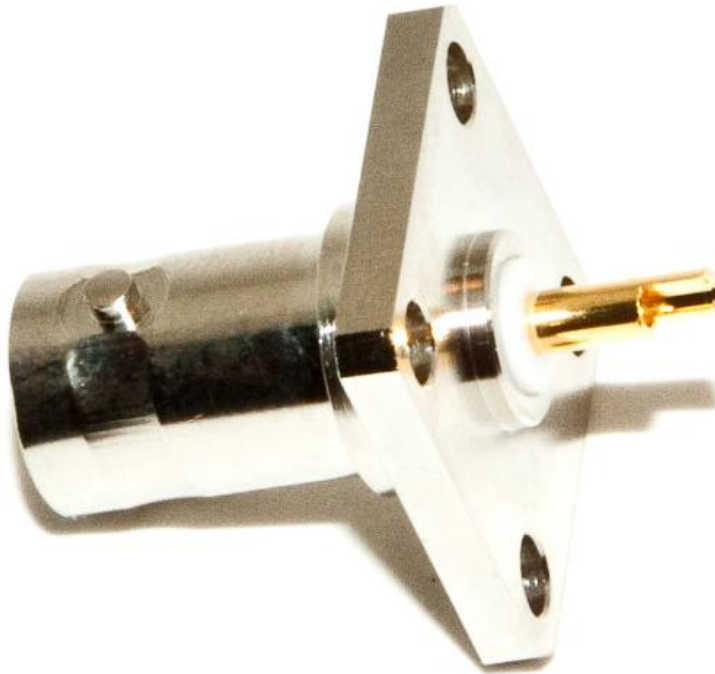

- Mueller's BU-P2451 is used as a BNC female receptacle that can be mounted to a panel with 0.53" (12.7mm) spacing between each hole.
- Material: Body Brass, tarnish-resistant plating
 Center contact Gold-plated beryllium copper
 Dielectric PTFE
- Rating Nominal Impedance 50 Ohms
 Voltage 30VAC/60VDC max, shield/earth
 500 VRMS inner conductor/shield
 Temperature -65°C (-85°F) to 165°C (329°F)
- RoHS 3 compliant, exemption 6c

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Mueller](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543004](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#)
[R921934000](#) [R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#)
[108-1000-106](#) [108-2301-621](#) [66001-9](#) [7013](#) [930166100](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#) [BP30-2BR10-B PKG](#) [BP30-10-WT](#) [BP30-2BR-](#)
[B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R921922000](#) [R644543022](#) [R948142000](#) [R941346000](#) [R941341000](#)