



# Chip Multilayer Hybrid Baluns

## Chip Multilayer Hybrid Baluns

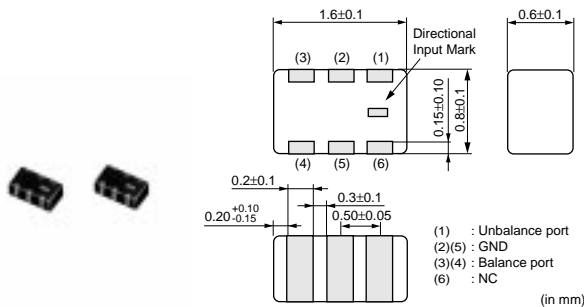

LDB18 Series

\* Terminal of "NC" should be fixed to the no connected pattern.  
All the technical data and information contained herein are subject to change without prior notice.

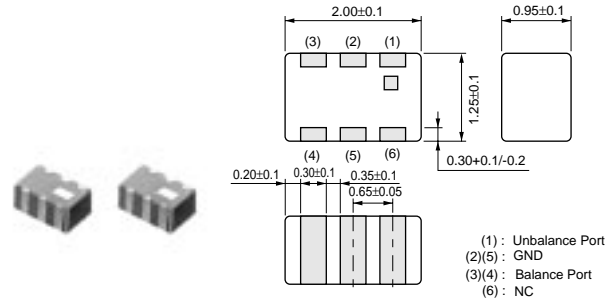

LDB21 Series

\* Terminal of "NC" should be connected to the floating land.  
All the technical data and information contained herein are subject to change without prior notice.  
in mm

Part Number	Frequency Range (MHz)	Insertion Loss I) (dB)	Insertion Loss II) (dB)	Unbalance Impedance (Nom.) (ohm)	Balance Impedance (Differential) (Nom.) (ohm)
LDB181G8115G-120	1810 ±100MHz	1.1 max. (at 25°C)	1.2 max. (-40~+85°C)	50	150
LDB181G8120G-120	1810 ±100MHz	1.2 max. (at 25°C)	1.3 max. (-40~+85°C)	50	200
LDB181G8405C-110	1842.5 ±37.5MHz	1.2 max. (at 25°C)	1.3 max. (-40~+85°C)	50	50
LDB181G8420C-110	1842.5 ±37.5MHz	1.3 max. (at 25°C)	1.4 max. (-40~+85°C)	50	200
LDB181G8820C-110	1880.0 ±30.0MHz	1.3 max. (at 25°C)	1.4 max. (-40~+85°C)	50	200
LDB181G9505C-110	1955.0 ±35.0MHz	1.2 max. (at 25°C)	1.3 max. (-40~+85°C)	50	50
LDB181G9510C-110	1955.0 ±35.0MHz	1.2 max. (at 25°C)	1.3 max. (-40~+85°C)	50	100
LDB182G4505C-110	2450.0 ±50.0MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	50
LDB182G4510C-110	2450.0 ±50.0MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	100
LDB182G4520C-110	2450.0 ±50.0MHz	1.3 max. (at 25°C)	1.4 max. (-40~+85°C)	50	200
LDB183G7010C-110	3700.0 ±300.0MHz	1.4 max. (at 25°C)	1.5 max. (-40~+85°C)	50	100
LDB184G5010C-110	4500.0 ±300.0MHz	1.1 max. (at 25°C)	1.2 max. (-40~+85°C)	50	100
LDB185G3705G-120	5375 ±475MHz	1.50 max. (at 25°C)	1.65 max. (-40~+85°C)	50	50
LDB185G3710G-120	5375 ±475MHz	1.20 max. (at 25°C)	1.35 max. (-40~+85°C)	50	100
LDB18869M10G-120	869.5 ±45.5MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	100
LDB18869M15G-120	869.5 ±45.5MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	150
LDB211G6005C-001	1600 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	50
LDB211G6010C-001	1600 ±100MHz	0.9 max. (at 25°C)	1.0 max. (-40~+85°C)	50	100
LDB211G6020C-001	1600 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	200
LDB211G8005C-001	1800 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	50
LDB211G8010C-001	1800 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	100
LDB211G8020C-001	1800 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	200
LDB211G8105C-001	1815 ±105MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	50
LDB211G8110C-001	1810 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	100
LDB211G8115C-001	1810 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	150
LDB211G8120C-002	1810 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	200
LDB211G9005C-001	1900 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	50
LDB211G9010C-001	1900 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	100
LDB211G9020C-001	1900 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	200
LDB212G1005C-001	2100 ±100MHz	0.9 max. (at 25°C)	1.0 max. (-40~+85°C)	50	50
LDB212G1010C-001	2100 ±100MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	100
LDB212G1020C-001	2100 ±100MHz	0.9 max. (at 25°C)	1.0 max. (-40~+85°C)	50	200
LDB212G4005C-001	2400 ±100MHz	0.8 max. (at 25°C)	0.9 max. (-40~+85°C)	50	50
LDB212G4010C-001	2400 ±100MHz	0.9 max. (at 25°C)	1.0 max. (-40~+85°C)	50	100
LDB212G4020C-001	2400 ±100MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	200
LDB213G7010C-002	3700 ±300MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	100
LDB213G7020C-001	3700 ±300MHz	2.2 max. (at 25°C)	2.3 max. (-40~+85°C)	50	200
LDB215G1210C-001	5125 ±225MHz	1.10 max. (at 25°C)	1.25 max. (-40~+85°C)	50	100
LDB215G2505C-001	5250 ±100MHz	1.10 max. (at 25°C)	1.25 max. (-40~+85°C)	50	50
LDB215G2510C-001	5250 ±100MHz	0.95 max. (at 25°C)	1.10 max. (-40~+85°C)	50	100

Continued on the following page.

**Note** • This PDF catalog is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

Part Number	Frequency Range (MHz)	Insertion Loss I) (dB)	Insertion Loss II) (dB)	Unbalance Impedance (Nom.) (ohm)	Balance Impedance (Differential) (Nom.) (ohm)
<b>LDB215G2520C-001</b>	5250 ±100MHz	1.10 max. (at 25°C)	1.25 max. (-40~+85°C)	50	200
<b>LDB215G3710C-001</b>	5375 ±475MHz	0.95 max. (at 25°C)	1.10 max. (-40~+85°C)	50	100
<b>LDB215G5105C-001</b>	5512 ±363MHz	1.10 max. (at 25°C)	1.25 max. (-40~+85°C)	50	50
<b>LDB215G5110C-001</b>	5512 ±363MHz	0.95 max. (at 25°C)	1.10 max. (-40~+85°C)	50	100
<b>LDB215G5120C-001</b>	5512 ±363MHz	1.10 max. (at 25°C)	1.25 max. (-40~+85°C)	50	200
<b>LDB21836M15C-002</b>	836.5 ±12.5MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	150
<b>LDB21836M20C-001</b>	836.5 ±12.5MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	200
<b>LDB21869M10C-001</b>	869.5 ±45.5MHz	1.0 max. (at 25°C)	1.1 max. (-40~+85°C)	50	100
<b>LDB21869M15C-001</b>	869.5 ±45.5MHz	1.2 max. (at 25°C)	1.3 max. (-40~+85°C)	50	150
<b>LDB21869M20C-001</b>	869.5 ±45.5MHz	1.2 max. (at 25°C)	1.3 max. (-40~+85°C)	50	200
<b>LDB21881M05C-001</b>	881.5 ±12.5MHz	1.4 max. (at 25°C)	1.5 max. (-40~+85°C)	50	50
<b>LDB21881M20C-001</b>	881.5 ±12.5MHz	1.4 max. (at 25°C)	1.5 max. (-40~+85°C)	50	200
<b>LDB21897M05C-001</b>	897.5 ±17.5MHz	1.4 max. (at 25°C)	1.5 max. (-40~+85°C)	50	50
<b>LDB21906M05C-001</b>	906.0 ±19.0MHz	1.4 max. (at 25°C)	1.5 max. (-40~+85°C)	50	50
<b>LDB21906M20C-001</b>	906.0 ±19.0MHz	1.3 max. (at 25°C)	1.4 max. (-40~+85°C)	50	200
<b>LDB21924M05C-001</b>	924.5 ±35.5MHz	1.3 max. (at 25°C)	1.4 max. (-40~+85°C)	50	50
<b>LDB21924M20C-001</b>	924.5 ±35.5MHz	1.3 max. (at 25°C)	1.4 max. (-40~+85°C)	50	200
<b>LDB21942M05C-001</b>	942.5 ±17.5MHz	1.4 max. (at 25°C)	1.5 max. (-40~+85°C)	50	50
<b>LDB21942M20C-001</b>	942.5 ±17.5MHz	1.3 max. (at 25°C)	1.4 max. (-40~+85°C)	50	200

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Murata](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [1E1305-3](#) [1F1304-3S](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)