LQM21PN1R5MC0#

"#" indicates a package specification code.
















< List of part numbers with package codes > LQM21PN1R5MC0D , LQM21PN1R5MC0B

Shape

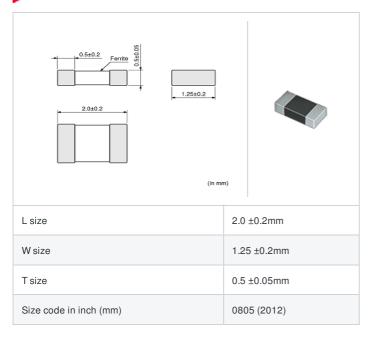



Notes

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM21P_C0 series.

Please apply the derating curve shown in the chart according to the operating temperature.

Please consider "Notice (Rating)."

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max.

References

Packaging code	Specifications	Minimum quantity
D	φ180mm Paper taping	4000
В	Packing in bulk	1000

Mass (Typ.)	
1 piece	0.007g

Specifications

Inductance	1.5µH ±20%
Inductance test frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	0.7A(Ambient temp.85°C) 0.52A(Ambient temp.125°C)
Max. of DC resistance	0.325Ω
Avg. of DC resistance	0.26Ω±25%
Self resonance frequency (min.)	70MHz
Operating temperature range	-55~125°C
Class of magnetic shield	Ferrite Core
Series	LQM21PN_C0

1 of 3



^{1.} This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




^{2.} This datasheet has only typical specifications because there is no space for detailed specifications



In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature.

Derating of Rated Current



2 of 3





Attention


1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

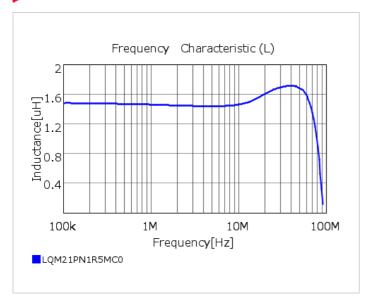

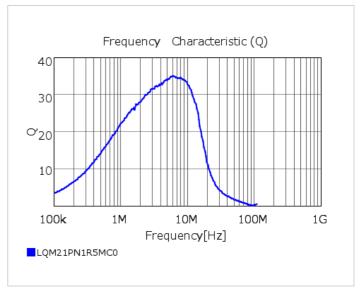



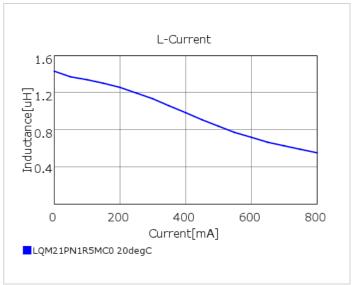

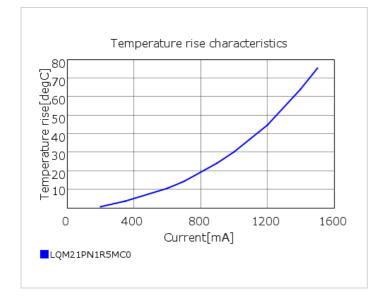

3 of 3



^{1.} This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

^{2.} This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by Murata manufacturer:

Other Similar products are found below:

CR32NP-100KC CR32NP-151KC CR32NP-180KC CR32NP-181KC CR32NP-1R5MC CR32NP-390KC CR32NP-3R9MC CR32NP680KC CR32NP-820KC CR32NP-8R2MC CR43NP-390KC CR43NP-560KC CR43NP-680KC CR54NP-181KC CR54NP-470LC

CR54NP-820KC CR54NP-8R5MC 70F224AI MGDQ4-00004-P MHL1ECTTP18NJ MHQ1005P10NJ MHQ1005P1N0S MHQ1005P2N4S

MHQ1005P3N6S MHQ1005P5N1S MHQ1005P8N2J PE-51506NL PE-53601NL PE-53602NL PE-53630NL PE-53824SNLT PE-92100NL

PG0434.801NLT PG0936.113NLT 9220-20 9310-16 PM06-2N7 PM06-39NJ A01TK 1206CS-471XJ HC2LP-R47-R HC2-R47-R HC32R2-R HCF1305-3R3-R 1206CS-151XG RCH664NP-140L RCH664NP-4R7M RCH8011NP-221L RCP1317NP-332L RCP1317NP-391L