

1. General Descriptions

LXRFZZUCCA-036(JP/US) and LXRFZZUCCA-037(EU) are UHF short range antenna (Magnetic loop antenna).



[Features]

- -Optimized antenna design for Murata tag
- -FCC / IC / ETSI / Japan Radio law certified device (FCC ID: VPYLXRF032, IC: 772C-LXRF032, JP: 007-AF0012, CE Mark is acquired)
- -SMA connection (reverse polarity)
- -RoHS compliance
- -Related product name

	EU	JP	US/Canada
Evaluation Kit*	LXRFZZUAAA-029-KIT	LXRFZZUAAA-031-KIT	LXRFZZUAAA-033-KIT
Reader writer	LXRFZZUAAA-027	LXRFZZUAAA-030	LXRFZZUAAA-032
Short Range Antenna	LXRFZZUCCA-037	LXRFZZUCCA-036	LXRFZZUCCA-036
Long Range Antenna	LXRFZZUCCA-035	LXRFZZUCCA-034	LXRFZZUCCA-034
Interface Board		LXRFZZUBBA-042	


^{*}A reader writer, a short range antenna, a long range antenna, an interface board, cables are included in Evaluation Kit.




2. Mechanical Information

[Dimension]

<Top View>

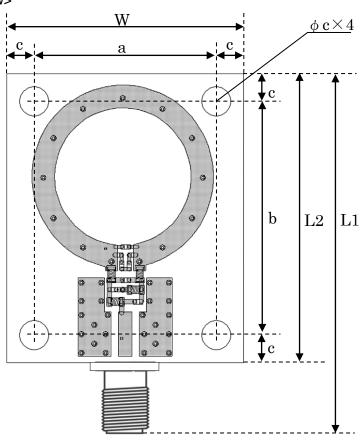

<Side View>



Mark	Size	Mark	Size	Mark	Size
L1	39.1 +/- 2.0	b	25.5 +/- 0.2	t	0.8 +0.2 / -0.1
L2	31.5 +/- 0.3	С	3.0 +/- 0.2		
W	26.0 +/- 0.3	φс	3.2 +/- 0.1		
а	20.0 +/- 0.2				


Connector type: RP-SMA(female)

< Specification is subject to change without notice >




3. Characteristics

3-1. Magnetic field

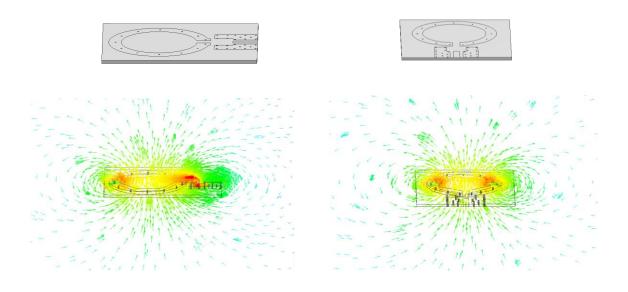

Please place the RFID tag at the position where it interlinks with the antenna magnetic field.

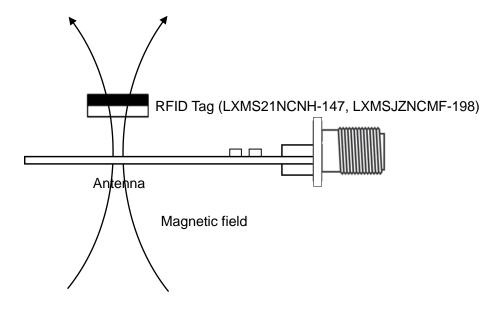



3-2. Ratings

3-2-1. Limiting values

Parameter	Symbol	Limiting values		Unit
		Min	Max	
Storage temperature	T _{STG}	-40	+85	°C

3-2-2. Operation condition

Parameter	Symbol	Min	Тур	Max	Unit
Ambient Temperature	T _{amb}		25		°C

3-3. Electrical Characteristics

LXRFZZUCCA-036 (JP/US)

Parameter	Min	Тур	Max	Unit
Return Loss (@920MHz)			-10	dB
Gain		-16		dBi

LXRFZZUCCA-037 (EU)

Parameter	Min	Тур	Max	Unit
Return Loss (@866MHz)			-10	dB
Gain		-16		dBi

4. Packaging

4-1 Quantities per 1 tray

10pcs / Tray

4-2 Quantities per 1 carton

10pcs / Carton

4-3 Minimum order quantity

10pcs



5. Contact window

URL: http://www.murata.com/en-global/products/rfid

Email: magicstrap@murata.com

For any inquiries, please feel free to contact us.

NOTICE

1. Storage Conditions:

To avoid damaging, be sure to observe the following points.

- Store products where the ambient temperature is 15 to 35 °C and humidity 45 to 75% RH. (Packing materials, In particular, may be deformed at the temperature over 40 °C.).
- Store products in non corrosive gas (Cl₂, NH₃,SO₂, No_x, etc.).
- Stored products should be used within 6 months of receipt.

2. Handling Conditions:

Be careful in handling or transporting products because excessive stress or mechanical shock may break products.



Note:

Please make sure that your product has been evaluated and confirmed against your specifications when our product is applied to your product.

All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Murata manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF EXB144SM C37 MAF94051 P1744 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352