



### FEATURES

- Optimised bipolar output voltages for IGBT/ Mosfet gate drives
- Reinforced insulation to UL60950 recognised<sup>3</sup>
- ANSI/AAMI ES60601-1, 1 MOPP/2 MOOP's recognised<sup>4</sup>
- 5.2kVDC isolation test voltage 'Hi Pot Test'
- Ultra low coupling capacitance
- SIP package style
- 5V, 12V, 15V & 24V inputs
- +15V/-3V, +15V/-5V, +15V/-8.7V, +15V/-15V, +17V/-9V, +18V/-2.5V, +20V/-3.5V & +20V/-5V outputs
- Operation to 100°C
- Characterised CMTI >200kV/μs
- Continuous barrier withstand voltage 2.4kVd
- Characterised partial discharge performance

### PRODUCT OVERVIEW

The MGJ2 series of DC-DC converters is ideal for powering 'high side' and 'low side' gate drive circuits for IGBTs and Mosfets in bridge circuits. A choice of asymmetric output voltages allows optimum drive levels for best system efficiency and EMI. The MGJ2 series is characterised for high isolation and dv/dt requirements commonly seen in bridge circuits used in motor drives and inverters, while the MGJ2 industrial grade temperature rating and construction gives long service life and reliability.

### SELECTION GUIDE

Order Code	Nominal Input Voltage		Output Voltage 1	Output Voltage 2	Output Current 1	Output Current 2	Input Current at Rated Load	Load Regulation (Typ)	Load Regulation (Max)	Ripple & Noise (Typ) <sup>2</sup>	Ripple & Noise (Max) <sup>2</sup>	Efficiency (Min)	Efficiency (Typ)	Isolation Capacitance	MTTF <sup>1</sup>	
	V	V	V	V	mA	mA	mA	%	%	mVp-p	mVp-p	%	%		MIL.	Tel.
															kHrs	kHrs
MGJ2D051505SC	5	15	-5	80	40	360	5.7	7	30	50	71	76	3	2095		
MGJ2D051509SC	5	15	-8.7	80	40	390	6	7	30	50	73	77.5	3	1902		
MGJ2D051515SC	5	15	-15	67	67	492	7	8.5	20	35	74	78	3	2629		
MGJ2D051802SC	5	18	-2.5	80	80	410	9	12	20	50	70	75	3	1376	31920	
MGJ2D052003SC	5	20	-3.5	80	80	470	8	11	20	50	72	77	3	1253	32603	
MGJ2D052005SC	5	20	-5	80	40	440	6.2	8	30	50	74	78.5	3	1655		
MGJ2D121503SC <sup>3</sup>	12	15	-3	95	95	170	8	10	25	50	76	80	3			
MGJ2D121505SC	12	15	-5	80	40	150	4.7	6	30	50	76	80	3	2339		
MGJ2D121509SC	12	15	-8.7	80	40	155	5.3	7.5	30	50	76	80	3	2296		
MGJ2D121515SC	12	15	-15	67	67	203	6.0	7	24	40	78	82	3	2707		
MGJ2D121802SC	12	18	-2.5	80	80	170	8	11	20	50	74	80	3	1553	36519	
MGJ2D122003SC	12	20	-3.5	80	80	190	7	10	20	50	77	82	3	1371	36431	
MGJ2D122005SC	12	20	-5	80	40	195	5.5	8	30	45	78	82	3	1799		
MGJ2D151505SC	15	15	-5	80	40	120	5	7	30	50	75	80	3	2374		
MGJ2D151509SC	15	15	-8.7	80	40	130	5	7	30	50	76	80	3	2736		
MGJ2D151515SC	15	15	-15	67	67	167	5.5	7	23	35	75	79	3	2100		
MGJ2D151802SC	15	18	-2.5	80	80	130	8	11	20	50	73	79	3	1392	32908	
MGJ2D152003SC	15	20	-3.5	80	80	150	7	10	20	50	76	81	3	2000	80000	
MGJ2D152005SC	15	20	-5	80	40	145	6	8	30	50	78	81	3	1864		
MGJ2D241505SC	24	15	-5	80	40	75	4.6	7	30	50	75	80.5	4	2194		
MGJ2D241509SC	24	15	-8.7	80	40	80	4.8	7	30	50	77	82	4	2275		
MGJ2D241709SC	24	17	-9V	80	80	105	6	8	30	50	78	83	4	1050	47000	
MGJ2D241802SC	24	18	-2.5	80	80	90	8	11	20	50	73	80	4	1461	32315	
MGJ2D242003SC	24	20	-3.5	80	80	90	7	10	20	50	76	82	4	1333	32482	
MGJ2D242005SC	24	20	-5	80	40	90	6	8	30	50	78	82	4	1725		

### INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	
	Continuous operation, 15V input types	13.5	15	16.5	
	Continuous operation, 24V input types	21.6	24	26.4	
Input reflected ripple	5V input types		40		mA
	12V & 15V input types		20		
	24V input types		15		

### OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	T <sub>A</sub> =-40°C to 100°C			2	W
Voltage Set Point Accuracy	See tolerance envelopes				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>		1.0	1.2	%/%

1. Calculated using MIL-HDBK-217 FN2 and Telcordia SR-332 calculation model with nominal input voltage at full load.
2. See ripple & noise test method.
3. UL60950-1 recognition is currently pending for the MGJ2D121503SC variant as the product is in development and data included within this datasheet is preliminary.
4. ANSI/AAMI ES60601-1 recognition is currently pending for the MGJ2D241709SC, MGJ2Dxx1515SC, MGJ2Dxx1802SC, MGJ2D121503SC and MGJ2Dxx2003SC variants.

All specifications typical at T<sub>A</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.



For full details go to [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)



ISOLATION CHARACTERISTICS						
Parameter	Conditions		Min.	Typ.	Max.	Units
Isolation test voltage	Production tested for 1 second		5200			VDC
	Qualification tested for 1 minute		5200			
Resistance	Viso= 500VDC			1		GΩ
Continuous barrier withstand voltage	Non-safety barrier application				2400	V
Safety standard	UL60950-1	MGJ2Dxx1515SC types	Basic/supplementary		200	Vrms
		All others <sup>1</sup>	Reinforced		150	
	ANSI/AAMI ES60601-1	MGJ2Dxx1515SC types	Basic/supplementary		300	
			1 MOOP		200	
		All others <sup>2</sup>	1 MOOP		300	
			2 MOOP/1 MOPP		200	

GENERAL CHARACTERISTICS						
Parameter	Conditions		Min.	Typ.	Max.	Units
Switching frequency	All other types			45		kHz
	MGJ2Dxx1802MC types			50		

TEMPERATURE CHARACTERISTICS						
Parameter	Conditions		Min.	Typ.	Max.	Units
Specification	All output types (see safety approval section for limitations)		-40		100	°C
Storage			-55		125	
Case Temperature above ambient	5V input types			24		
	All other input types			20		
Cooling	Free air convection					

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection	Continuous
Lead temperature 1mm from case for 10 seconds	260°C
Input voltage $V_{IN}$ , MGJ2D05xxxxSC	5.5V
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760-1 Section 6.1.3. Please refer to <a href="#">application notes</a> for further information.
Input voltage $V_{IN}$ , MGJ2D12xxxxSC	13.2V
Input voltage $V_{IN}$ , MGJ2D15xxxxSC	16.5V
Input voltage $V_{IN}$ , MGJ2D24xxxxSC	26.4V

1. UL60950-1 recognition is currently pending for the MGJ2D121503SC variant.

2. ANSI/AAMI ES60601-1 recognition is currently pending for the MGJ2D241709SC, MGJ2Dxx1515SC, MGJ2Dxx1802SC, MGJ2D121503SC and MGJ2Dxx2003SC variants.

**TECHNICAL NOTES**

**ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions MGJ2 series of DC-DC converters are all 100% production tested at 5.2kVDC for 1 second and have been qualification tested at 5.2kVDC for 1 minute.

The MGJ2 series is recognised by Underwriters Laboratory, please see safety approval section for more information. When the insulation in the MGJ2 series is not used as a safety barrier, i.e. provides functional isolation only, continuous or switched voltages across the barrier up to 2.4kV are sustainable. This is established by measuring the partial discharge inception voltage in accordance with IEC 60270. Please contact Murata for further information.

**REPEATED HIGH-VOLTAGE ISOLATION TESTING**

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

**SAFETY APPROVAL**

**MGJ2Dxx1515SC**

**ANSI/AAMI ES60601-1**

The MGJ2Dxx1515SC variants are pending recognition by Underwriters Laboratory (UL) to ANSI/AAMI ES60601-1 and provides 1 MOOP (Means Of Operator Protection) based upon a working voltage of 200 Vrms max and 280 Vpk max., between Primary and Secondary and between Primary and its Enclosure, in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C (case temperature measured on the face opposite the pins).

File Number E202895 applies.

**UL60950**

The MGJ2Dxx1515SC variants have been recognised by Underwriters Laboratory (UL) to UL60950 for basic/supplementary insulation to a working voltage of 200Vrms in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C (case temperature measured on the face opposite the pins).

File number E151252 applies.

Creepage and clearance 2mm

Working altitude 4000m

**Fusing**

The MGJ2 Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

MGJ2D051515SC: 2A

MGJ2D121515SC: 750mA

MGJ2D151515SC: 750mA

All fuses should be UL recognised and rated to 125V.

**All other variants**

**ANSI/AAMI ES60601-1**

The MGJ2 series has been recognised by Underwriters Laboratory (UL) to ANSI/AAMI ES60601-1 and provides 1 MOOP (Means Of Operator Protection) based on a working voltage of 300Vrms or 2 MOOP based upon a working voltage of 200 Vrms, and 1 MOPP (Mean Of Patient Protection) based on a working voltage of 200Vrms., between Primary and Secondary. The MGJ2D241709SC, MGJ2Dxx1802SC, MGJ2D121503SC and MGJ2Dxx2003SC variants are currently pending recognition.

File number E202895 applies.

**UL60950**

The MGJ2 series is recognised by Underwriters Laboratory (UL) to UL60950 for reinforced insulation to a working voltage of 150Vrms and for basic/supplementary insulation to a working voltage of 300Vrms. The MGJ2D121503SC variant is currently pending recognition.

File number E151252 applies.

Over voltage category	OVC I	OVC II
Working voltage	150Vrms	300Vrms
Working altitude	2000m	2000m
Creepage & clearance	2mm	2mm

**Fusing**

The MGJ2 Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

MGJ2D05xxxxSC: 1.25A

MGJ2D12xxxxSC: 750mA

MGJ2D15xxxxSC: 750mA

MGJ2D24xxxxSC: 750mA

All fuses should be UL recognised and rated to 125V.

**RoHS COMPLIANCE INFORMATION**



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. Please refer to [application notes](#) for further information. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)


**ENVIRONMENTAL VALIDATION TESTING**

The following tests have been conducted on this product series, please contact Murata if further information about the tests is required.

Test	Standard	Condition
Temperature cycling	MIL-STD 883 1010, Condition B	10 cycles between two chambers set to achieve -55°C and +125°C. The dwell time shall not be less than 10min.
Humidity bias	JEDEC STD 22-A101	85°C ± 2°C, 85% ± 5% R.H. for >1000 hours.
Storage life	JEDEC JESD22-A103, Condition A	125°C +10/-0°C for ≥1000 hours.
Vibration	MIL-STD 883 Method 2007, Condition A	1.5mm pk-pk / 20g pk min, 20-2000Hz, 4 sweeps in each of 3 mutually perpendicular axes at 3 oct/min.
Shock	MIL-STD 883 method 2002, Condition A	500g 1.0ms half sine, 5 shocks in each direction of 3 mutually perpendicular axes.
ESD	JESD22-A114	HBM Testing Standard at 3 stress levels; 2.0kV, 4.0kV and 8.0kV.
Bump	IEC Class 4M5 of ETS 300 019-2-4	Shock Spectrum Type II, 6ms duration, 250m/s <sup>2</sup> 500 bumps in 6 directions.
Solderability	IPC/ECA J-STD-002, Test A1	For lead free solderability the parts are conditioned in a steam ager for 8 hours ± 15 min. at a temperature of 93±3°C. Dipped in solder at 255°C ±5°C for 5 +0/-0.5 seconds. For leaded solderability the parts are conditioned in a steam ager for 8 hours ± 15 min. at a temperature of 93±3°C. Dipped in solder at 245°C ±5°C for 5 +0/-0.5 seconds
Solder heat	JEDEC JESD22-B106	The test sample is subjected to a molten solder bath at 260 ±5°C for 10 seconds (96SC tin/silver/copper).
Solder heat (hand)	MIL-STD 202 Method 210, Condition A	The soldering iron is heated to 350°C ± 10°C and applied to the terminations for a duration of 4 to 5 seconds.
Solvent cleaning	Resistance to cleaning agents.	Solvent – Novec 71IPA & Topklean EL-20A. Pulsed ultrasonic immersion 45°C- 65°C
Solvent Resistance	MIL-STD 883 Method 2015	Separate samples subjected to solvent A, solvent B and solvent D
Lead Integrity (Adhesion)	MIL-STD 883 Method 2025	Leads are bent through 90° until a fracture occurs.
Lead Integrity (Fatigue)	MIL-STD 883 Method 2004, condition B <sub>2</sub>	The leads are bent to an angle of 15°. Each lead is subjected to 3 cycles.
Lead Integrity (Tension/Pull)	MIL-STD 883 Method 2004, Condition A <sub>1</sub>	Pull of 0.227kg applied for 30 seconds. The force is then increased until the pins snap.

**PART NUMBER STRUCTURE**

**MGJ 2 D XX XXXX S C -RXX**

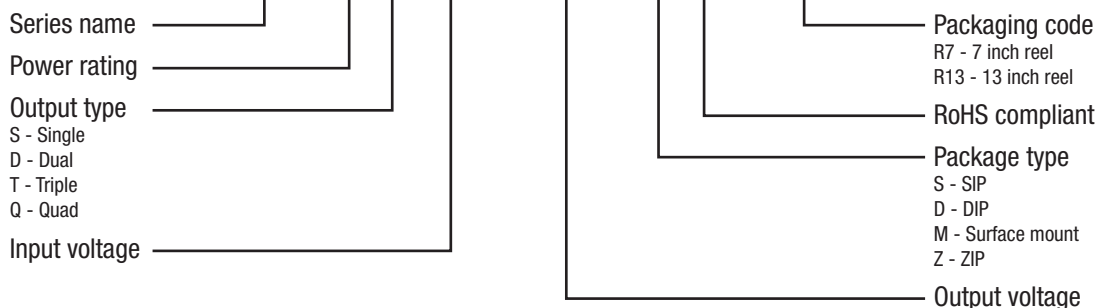

**CHARACTERISATION TEST METHODS**


**Ripple & Noise Characterisation Method**

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires

Measured values are multiplied by 10 to obtain the specified values.

**Differential Mode Noise Test Schematic**

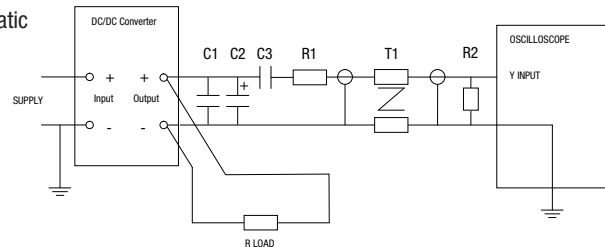

**APPLICATION NOTES**

**Minimum load**

The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically 1.25 times the specified output voltage if the output load falls to less than 5%.

**Gate Drive Applications Advisory Note**


For general guidance for product usage in gate drive applications please refer to ["gate drive application notes"](#).

**Capacitive loading and start up**





Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into capacitance ranging from 47µF up to 220µF with increased start times.

	Start-up time ms		Start-up time ms
MGJ2D051505SC	3.3	MGJ2D151505SC	2.5
MGJ2D051509SC	4.5	MGJ2D151509SC	3
MGJ2D051515SC	20.8	MGJ2D151515SC	10.5
MGJ2D051802SC	4	MGJ2D151802SC	3
MGJ2D052003SC	5	MGJ2D152003SC	5
MGJ2D052005SC	5.4	MGJ2D152005SC	4.5
MGJ2D121503SC	3	MGJ2D241505SC	2.7
MGJ2D121505SC	3.2	MGJ2D241509SC	3
MGJ2D121509SC	4	MGJ2D241709SC	4
MGJ2D121515SC	14.5	MGJ2D241802SC	3
MGJ2D121802SC	5	MGJ2D242003SC	4
MGJ2D122003SC	5	MGJ2D242005SC	4.2
MGJ2D122005SC	5.5		

Typical Start-Up Wave Form

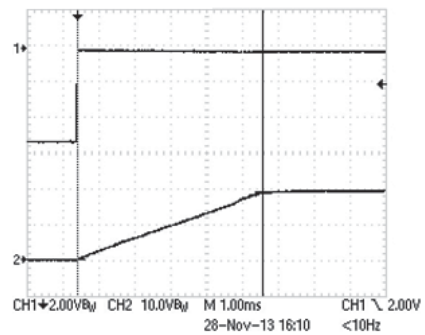


### EFFICIENCY VS LOAD

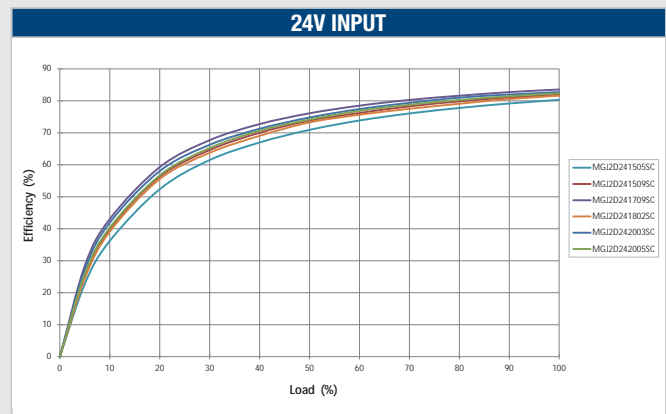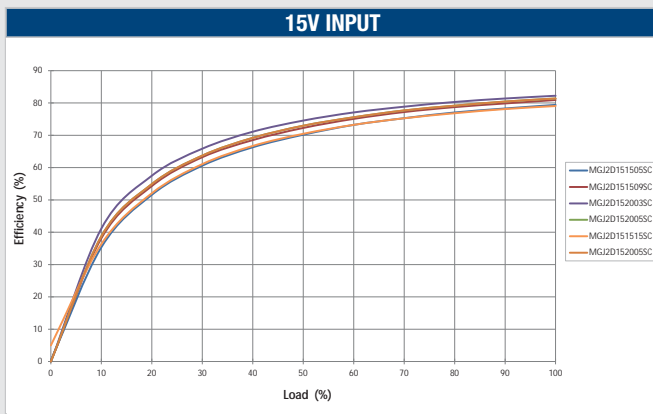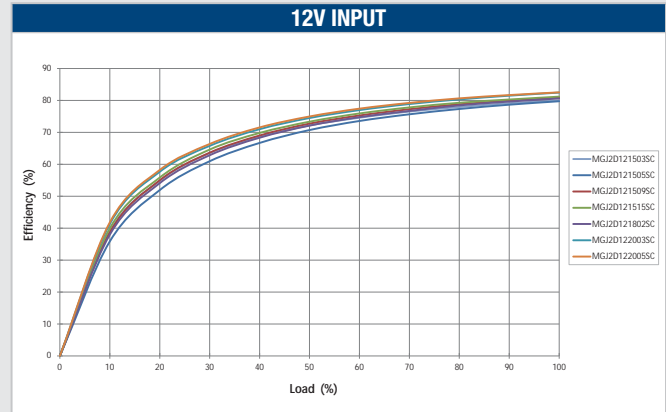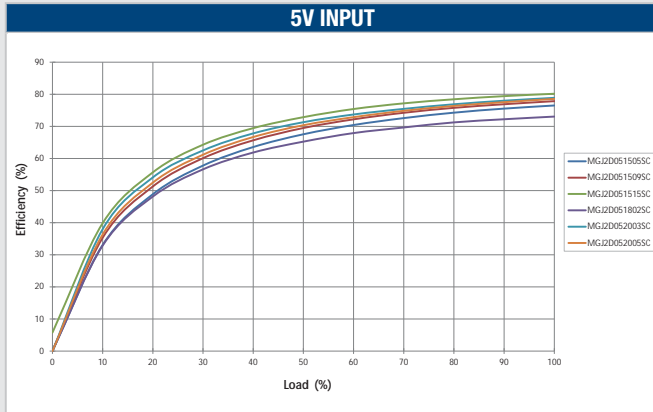


### TEMPERATURE DERATING GRAPHS


121503, 051515, 121515, 151515, 051802 & 052003

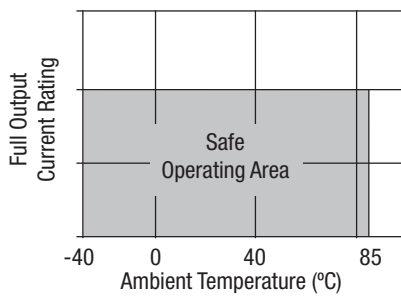

051505, 121802, 151802, 241802, 052005, 122003, 152003 & 242003

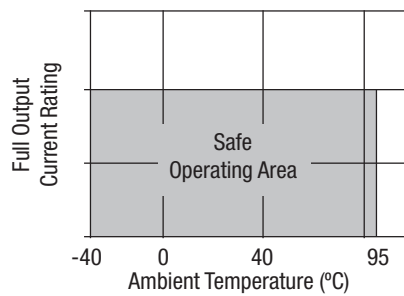


All other variants

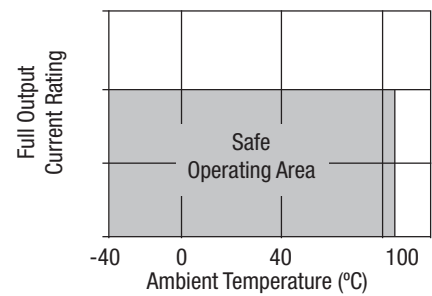


**POSITIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES**

The voltage tolerance envelopes show typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading and set point accuracy.


**051505, 051509, 151505 & 151509**

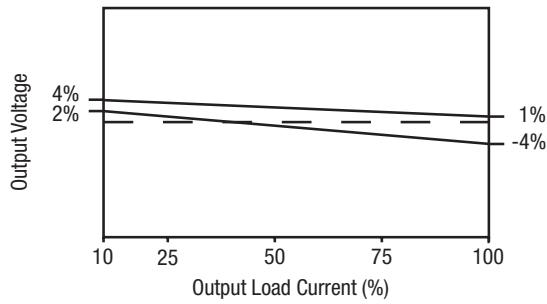


**122005, 152005 & 242005**

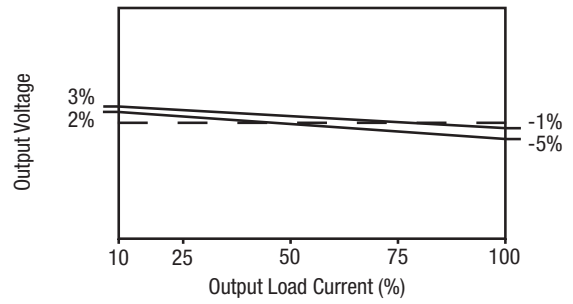


**121509, 241509 & 052005**

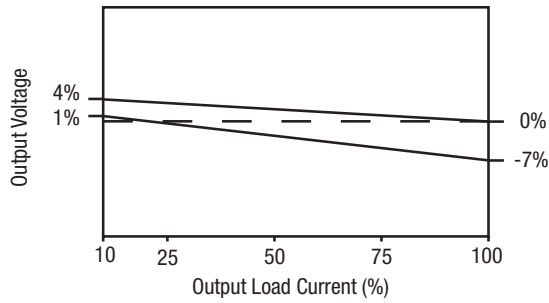


**121505 & 241505**

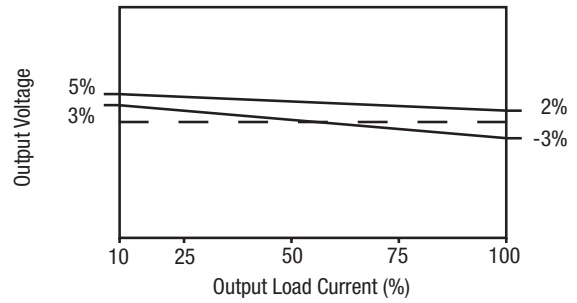

**121515 & 151515**

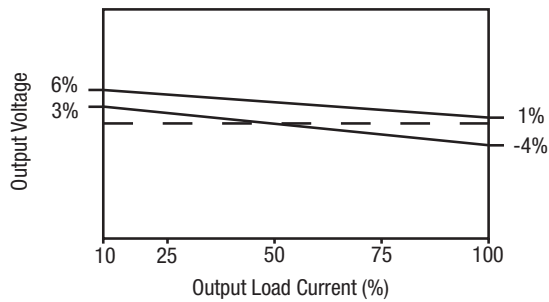


**051515**

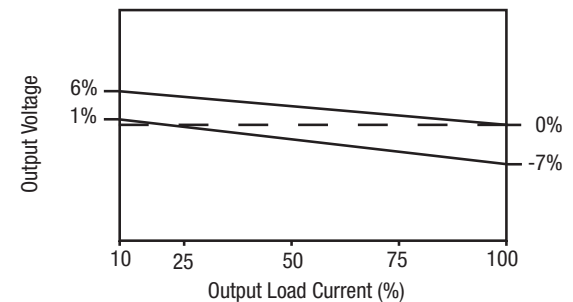




**POSITIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES CONTINUED**


**241709**

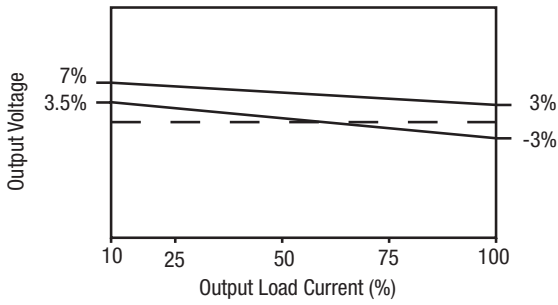


**052003**

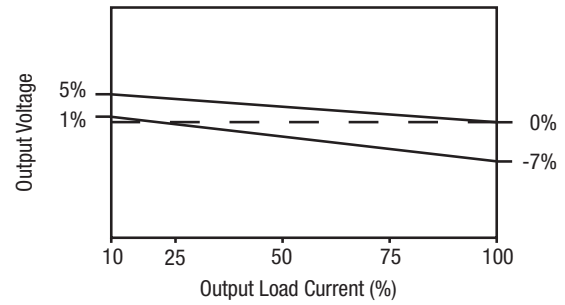


**122003, 152003 & 242003**

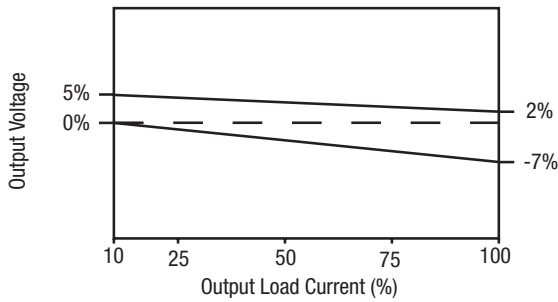


**051802**

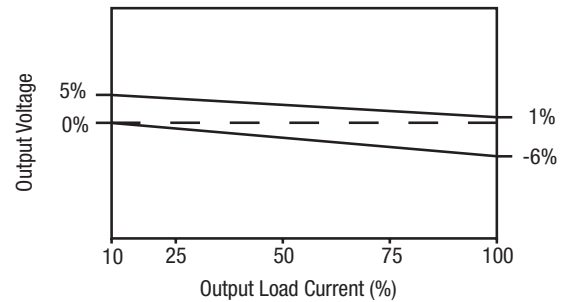

**121802, 151802 & 241802**

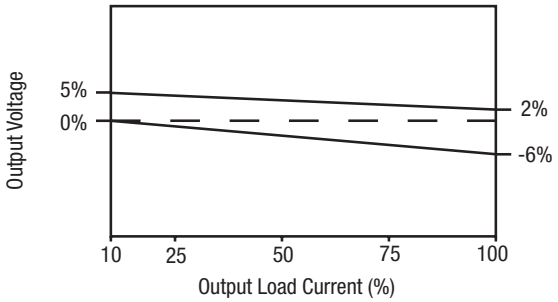


**121503**

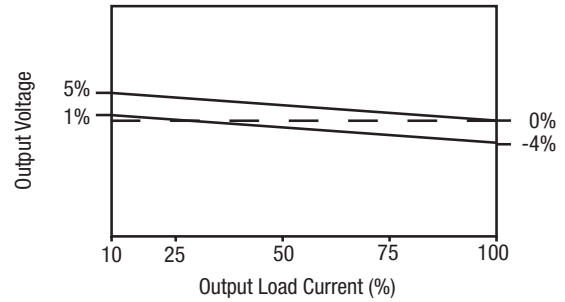


**NEGATIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES**


**051509, 052005, 121505, 122005, 152005 & 242005**

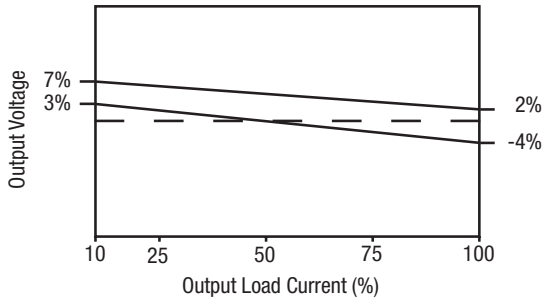


**151505**

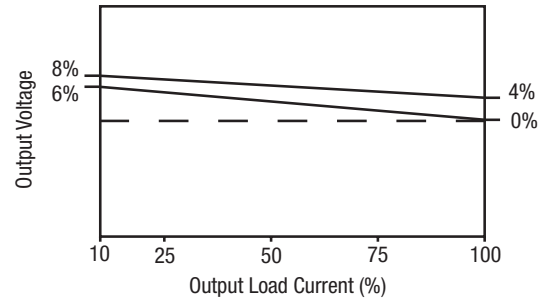


**121509 & 241509**

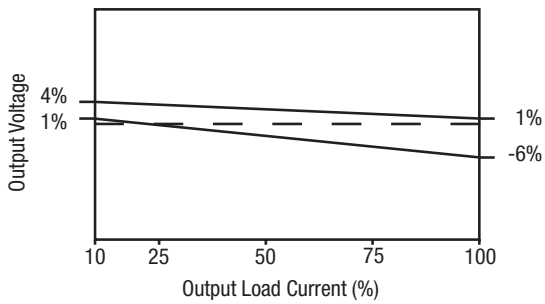


**051505**

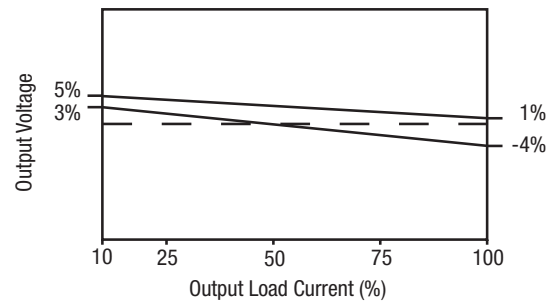

**151509 & 241505**

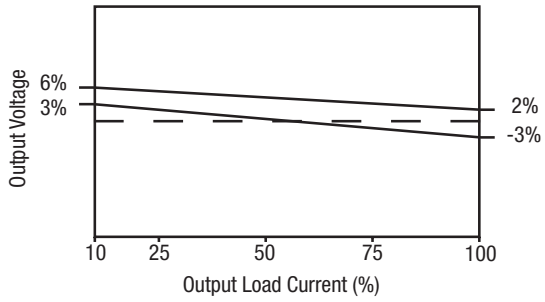


**121515 & 151515**

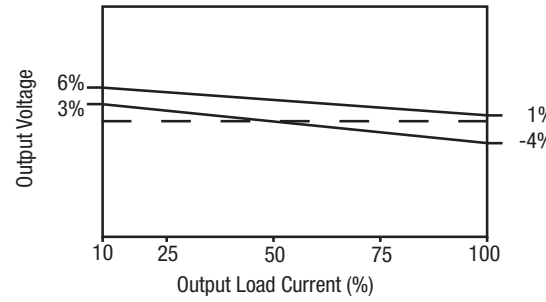


**NEGATIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES CONTINUED**


**051515**

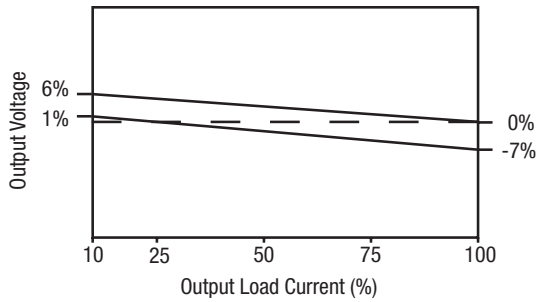


**241709**

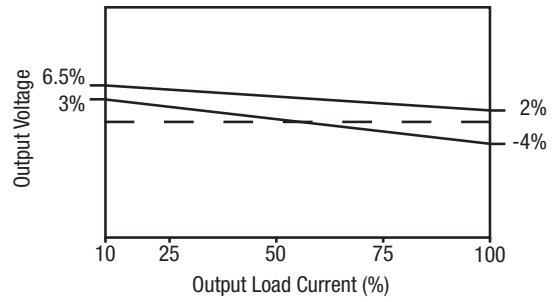


**052003**

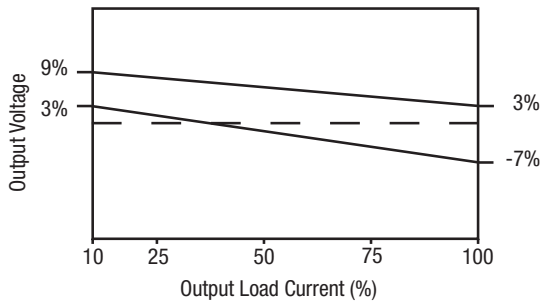


**122003, 152003 & 242003**

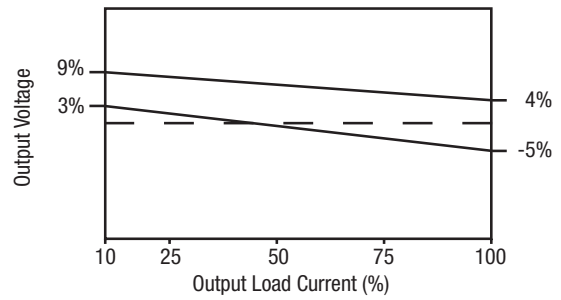


**051802**

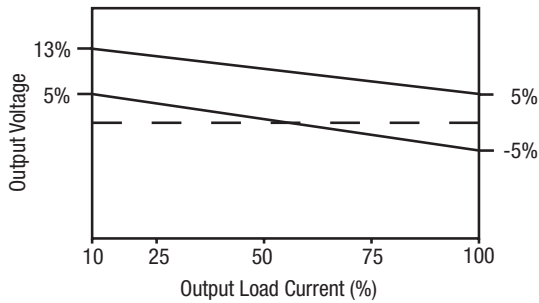

**121802, 151802 & 241802**

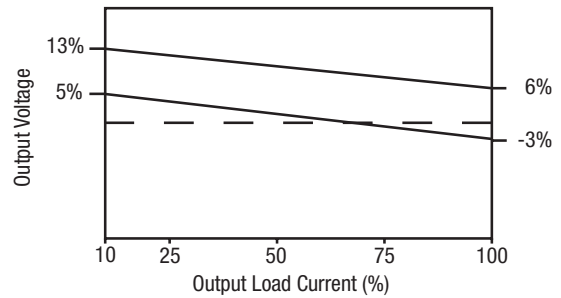


**121503**

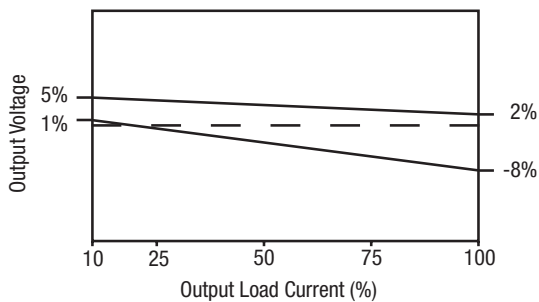

### PACKAGE SPECIFICATIONS

#### MECHANICAL DIMENSIONS

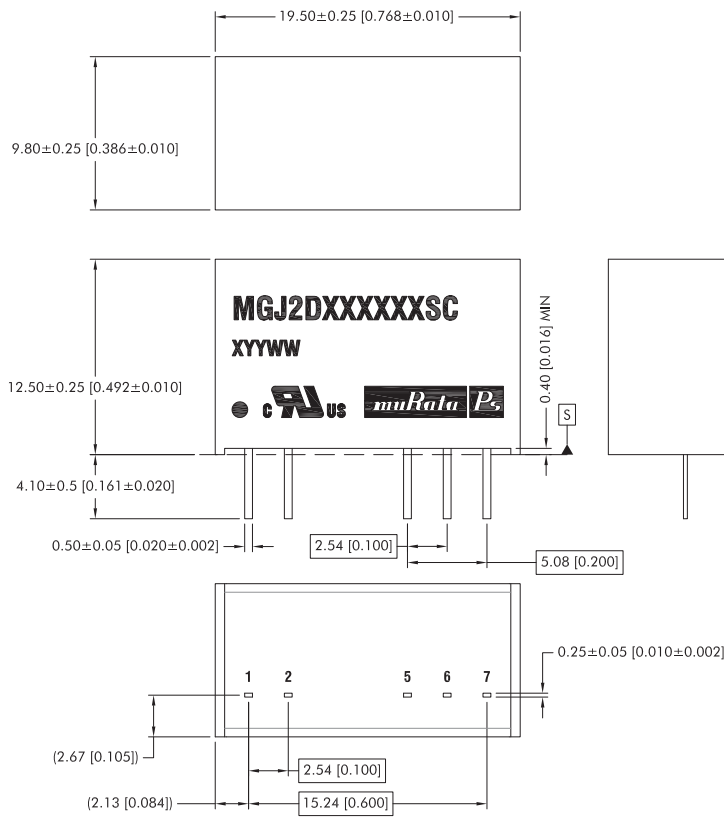

All dimensions in mm ±0.25mm (inches ±0.01). All pins on a 2.54 (0.1) pitch and within ±0.25 (0.01) of true position.


Weight: 4.3g

#### PIN CONNECTIONS

##### Pin Output

Pin	Function
1	+VIN
2	-VIN
5	-VOUT
6	OV
7	+VOUT

#### Tube outline dimensions

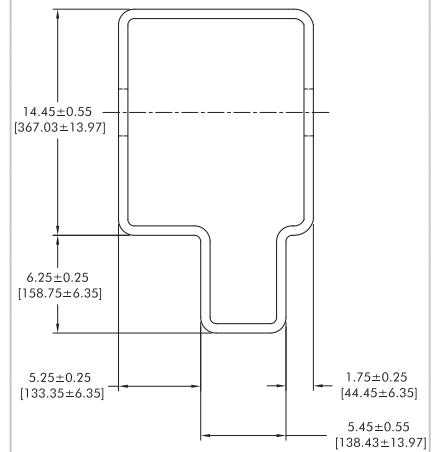


Unless otherwise stated all dimensions in mm (inches).

Tube length : 525mm [20.669] ±2.0 [0.079]

Tube Quantity : 25

#### RECOMMENDED FOOTPRINT DETAILS

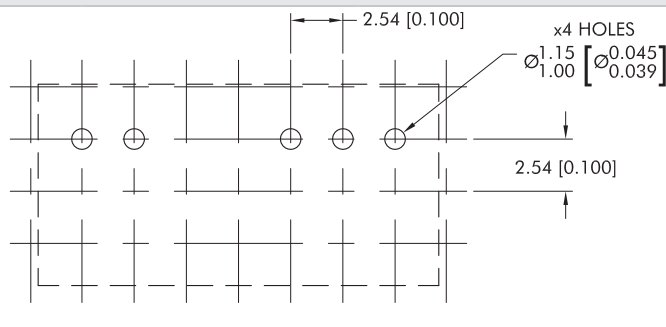

This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#):

Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2020 Murata Power Solutions (Milton Keynes) Ltd.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [Murata](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [MI-220-IW](#) [MI-J22-IY](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#)  
[AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [J80-0041NL](#) [V24C12M100BL](#)  
[V24C5C100BL2](#) [V300C12C150BG](#) [V375C24E150BG](#) [VE-JW3-CY](#) [VI-241-EU](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#)  
[419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#)  
[NCT1000N040R050B](#) [SPB05B-15](#)