



Preliminary Specification of COAXIAL CONNECTOR  
 Preliminary SPEC No. : NMM04-PU0049A  
 Part Number : MM126525


Written by H.Matsukawa  
 Checked by M.Atokawa  
 Date 05/Aug./2014  
 Revised A:14/Jan./14 MA

**SPECIFICATION**

**1. MECHANICAL**

This probe MM126525 is needed to measure Antenna side performance for manual measurement.

A>

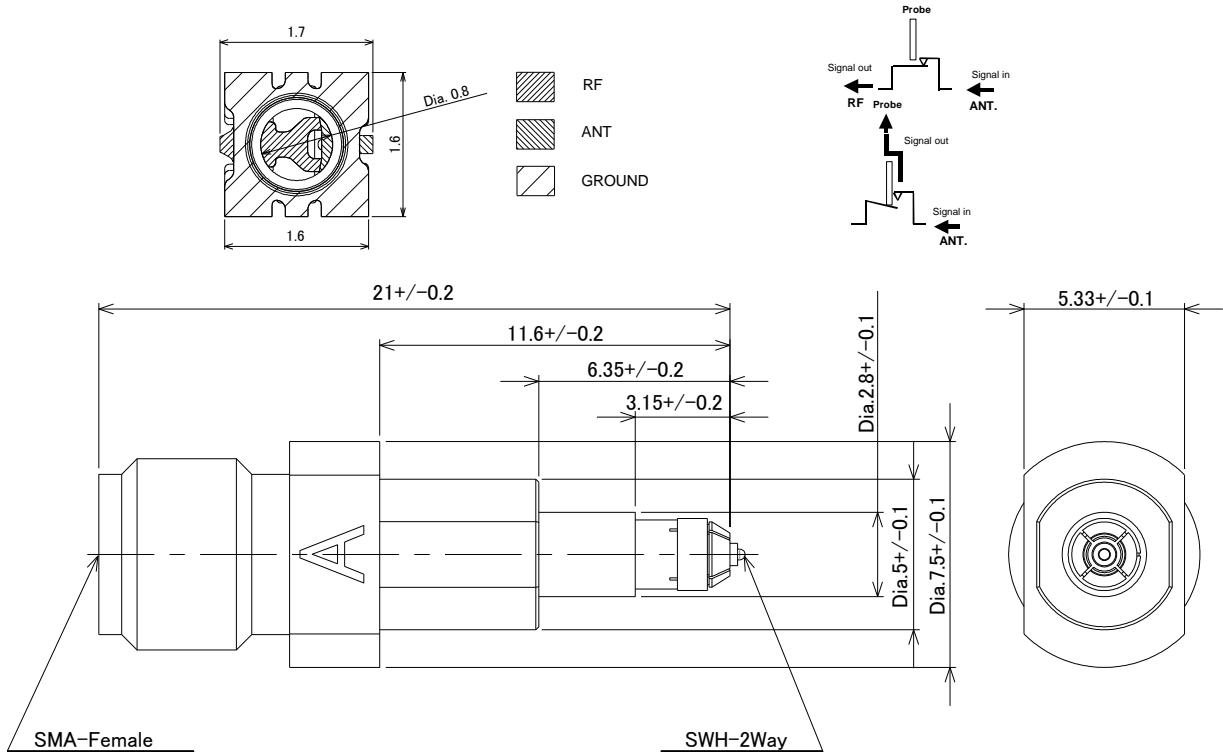

Scale: Free  
 Tolerances Unless  
 Otherwise Specified: +/-0.2  
 Unit: mm

Figure.1 Construction

**2. RATING:**

Item	Specification
Voltage Rating	30V r.m.s. maximum
Nominal Frequency Range	DC to 6GHz
Nominal Impedance	50Ω
Temperature Rating	-40°C to +85°C
Insulation Resistance	500 MΩ minimum
Withstanding Voltage	No evidence of breakdown
Initial Contact Resistance (without conductor resistance)	70 m Ω max.
Voltage Standing Wave Ratio (V.S.W.R.)	Meet the requirements of following spec. 1.5 max. (DC ~3GHz) 1.6 max. (3GHz ~6GHz)
Insertion loss	0.5dB max. (DC ~3GHz) 0.9dB max. (3GHz ~6GHz)
Durability	2K cycles
Engage and disengage force. (Probe side only)	a. Engagement 30N maximum b. Disengagement 5N minimum 20 N maximum

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Connectors](#) category:*

*Click to view products by [Murata](#) manufacturer:*

Other Similar products are found below :

[5739](#) [MXHS83QE1000](#) [1691](#) [M08SW](#) [M10X100](#) [4247](#) [MM126037](#) [4726](#) [5747](#) [MM126511](#) [MM126527](#) [2375380-1](#) [100045-045-958](#) [3743](#)  
[MXHS83QE3000](#) [M19100](#) [4320-01069-0](#) [3302](#) [783538-01](#) [3602](#) [3719](#) [4226](#) [4245](#) [4246](#) [4903](#) [MXFR01JA1000](#) [911](#) [BF-5](#) [M19201](#)  
[MM126317](#) [MM126515](#) [MM126518](#) [MM126526](#) [MM126711](#) [MM126715](#) [MXHS83QH3000](#) [BF-1](#) [BF-3](#) [BS-1](#) [A9663](#) [3316](#) [3603](#) [3862-0](#)  
[3862-0#](#) [4115](#) [4655](#) [5130](#) [5532](#) [5678-K-48](#) [6232A](#)