

### FEATURES

- ROHS COMPLIANT
- HIGH ISOLATION - 4000V RATING
- 8000V ISOLATION TEST VOLTAGE
- BARRIER 100% PRODUCTION TESTED
- LOW BARRIER CAPACITANCE - 10pF
- LOW LEAKAGE CURRENT - 2µA MAX
- 24-PIN DIP PACKAGE
- INTERNAL FILTERING

### APPLICATIONS

- BIOMEDICAL DATA ACQUISITION
- INDUSTRIAL PROCESS CONTROL
- ANALYTICAL MEASUREMENTS
- GROUND LOOP ELIMINATION
- INTRINSIC SAFETY SYSTEMS



### PRODUCT OVERVIEW

The PWR13XXC Series offers a broad line of low-cost, high-isolation voltage, unregulated, single and dual output DC/DC converters in a 24-pin DIP package. These small converters offer a 4000V isolation rating in a 1.25" x 0.8" package area.

The dielectric withstand characteristics of each converter is tested in production to ensure barrier integrity. During the development of the PWR13XXC Series extensive testing was done to verify that subjecting the barrier to as many as ten barrier tests will not destroy the barrier.

The PWR13XXC Series uses advanced circuit design and packaging technology to realize superior reliability and performance. A 220kHz driven push-pull oscillator is used to ensure stable frequency and non-saturating operation of the input stage. This means there are no high peak voltages or currents like other design topologies, which can reduce unit reliability.

Reliability is further enhanced by the use of MOSPOWER transistors. These rugged devices permit higher frequency operation with less complicated drive circuitry than is possible with bipolar power transistors. Reduced parts count adds to the reliability of the PWR13XXC Series.

The high efficiency of the PWR13XXC Series means less internal power dissipation. With less heat to dissipate, the PWR13XXC Series can operate over a wider ambient temperature range with no degradation of reliable operation.

The PWR13XXC Series offers the user low cost without sacrificing reliability. The use of surface mounted devices and manufacturing technologies make it possible to offer premium performance and low cost. Testing of the PWR13XXC isolation barrier is performed per the methods set forth by UL544, VDE750, CSA 22.2 and IEC 601-1.



### ELECTRICAL SPECIFICATIONS

Specifications typical at  $T_A = +25^{\circ}\text{C}$ , nominal input voltage, rated output current unless otherwise noted.

MODEL	NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	RATED OUTPUT VOLTAGE (V <sub>DC</sub> )	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED RIPPLE CURRENT (mAp-p)
				NO LOAD (mA)	RATED LOAD (mA)	
Available PWR1300AC	5	5	300	50	400	30
Available PWR1301AC	5	12	125	50	400	30
Discontinued PWR1302AC	5	15	100	50	400	30
Available PWR1303AC	5	±5	±150	50	400	30
Available PWR1304AC	5	±12	±63	50	400	30
Discontinued PWR1305AC	5	±15	±50	50	400	30
Discontinued PWR1306AC	12	5	300	30	167	25
Available PWR1307AC	12	12	125	30	167	25
Available PWR1308AC	12	15	100	30	167	25
Discontinued PWR1309AC	12	±5	±150	30	167	25
Discontinued PWR1310AC	12	±12	±63	30	167	25
Available PWR1311AC	12	±15	±50	30	167	25
Discontinued PWR1312AC	15	5	300	30	133	20
Discontinued PWR1313AC	15	12	125	30	133	20
Discontinued PWR1314AC	15	15	100	30	133	20
Discontinued PWR1315AC	15	±5	±150	30	133	20
Discontinued PWR1316AC	15	±12	±63	30	133	20
Available PWR1317AC	15	±15	±50	30	133	20

### COMMON SPECIFICATIONS

Specifications typical at  $T_A = +25^{\circ}\text{C}$ , rated input voltage, rated output current unless otherwise noted.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>INPUT</b>					
Voltage Range		4.5 10.8 13.5	5 12 15	5.5 13.2 16.5	V <sub>DC</sub> V <sub>DC</sub> V <sub>DC</sub>
<b>ISOLATION</b>					
Rated Voltage		4,000			V <sub>DC</sub>
Test Voltage	60 Hz, 60 Seconds	8,000			V <sub>pk</sub>
Resistance			10		GΩ
Capacitance			10		pF
Leakage Current	V <sub>ISO</sub> = 240VAC, 60Hz		1	2	μArms
<b>OUTPUT</b>					
Rated Power			1.5		Watts
Voltage Setpoint Accuracy	Rated Load, Nominal V <sub>in</sub>			±5	%
Ripple & Noise	BW = DC to 10MHz BW = 10Hz to 2MHz		40 10		mVp-p mVrms
<b>REGULATION</b>					
Line Regulation	High Line to Low Line		1.5		%/%
Load Regulation	See Performance Curves				
<b>GENERAL</b>					
Efficiency			75		%
Switching Frequency			220		kHz
Package Weight			12		g
MTTF per MIL-HDBK-217, Rev. E Ground Benign	Circuit Stress Method T <sub>A</sub> = +25°C T <sub>A</sub> = +85°C		2,000,000 90,000		Hr Hr
Fixed Ground	T <sub>A</sub> = +35°C		540,000		Hr
Naval Sheltered	T <sub>A</sub> = +35°C		300,000		Hr
Airborne Uninhabited Fighter	T <sub>A</sub> = +35°C		55,000		Hr
<b>TEMPERATURE</b>					
Specification		-40	+25	+85	°C
Storage		-55		+110	°C

**ABSOLUTE MAXIMUM RATINGS**

Output Short-Circuit Duration .....	5 seconds
Internal Power Dissipation.....	750mW
Lead Temperature (soldering, 10 seconds max) .....	+300°C

**ORDERING INFORMATION**

	<b>PWR</b>	<b>13XX</b>	<b>A</b>	<b>C</b>
Device Family _____	PWR indicates DC/DC converter			
Model Number _____	Selected from Table of Electrical Characteristics			
Package _____				
RoHS Compliant _____				

**MECHANICAL**

**TOP VIEW**

**SIDE VIEW**

**BOTTOM VIEW**

**PIN CONNECTIONS**

PIN	SINGLE MODELS	DUAL MODELS
1	+V <sub>IN</sub>	+V <sub>IN</sub>
2	+V <sub>IN</sub>	+V <sub>IN</sub>
11	+V <sub>OUT</sub>	+V <sub>OUT</sub>
12	+V <sub>OUT</sub>	+V <sub>OUT</sub>
13	-V <sub>OUT</sub>	Common
14	-V <sub>OUT</sub>	Common
15	No Pin	-V <sub>OUT</sub>
23	-V <sub>IN</sub>	-V <sub>IN</sub>
24	-V <sub>IN</sub>	-V <sub>IN</sub>

Notes:  
 All dimensions are in inches (millimeters).  
 GRID: 0.100 inches (2.54 millimeters)  
 \* Common pins not present on single output models.  
 PIN PLACEMENT TOLERANCE: ± 0.015"  
 Marked with: specific model ordered, date code, job code.  
 MATERIAL: Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance, wide operating temperature range, and good electrical properties under high humidity environments. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is matte tin 100 microinches min., over nickel, 40-80 microinches.







**SOLDERING INFORMATION**

The PWR13XXC devices are intended for wave soldering or manual soldering. **They are not intended to be subject to surface mount processes under any circumstances.**

The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C. Care should be taken to control manual soldering limits identical to that of wave soldering.

**TYPICAL PERFORMANCE CURVES**

Specifications at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current

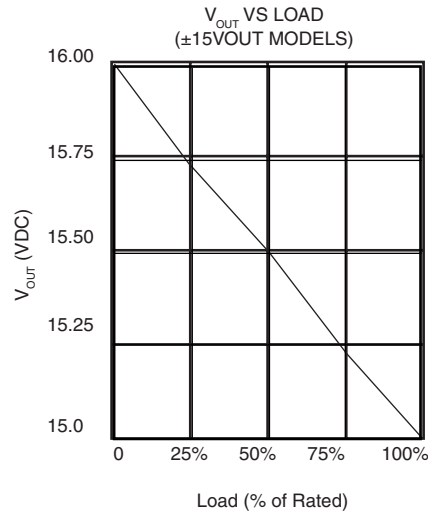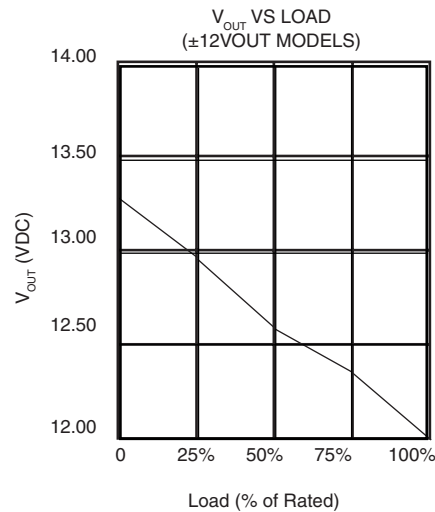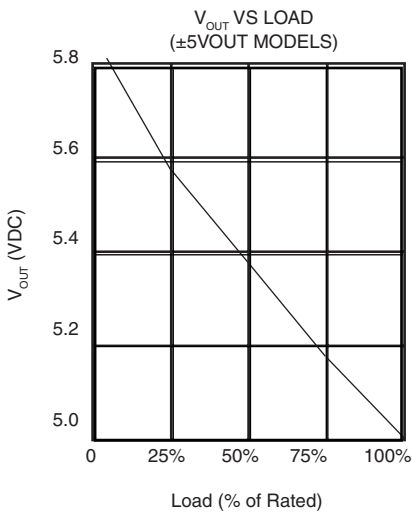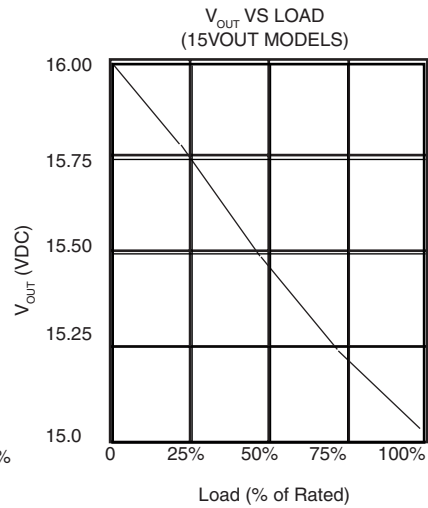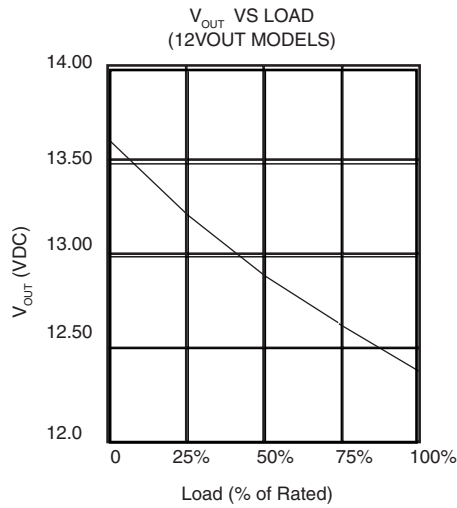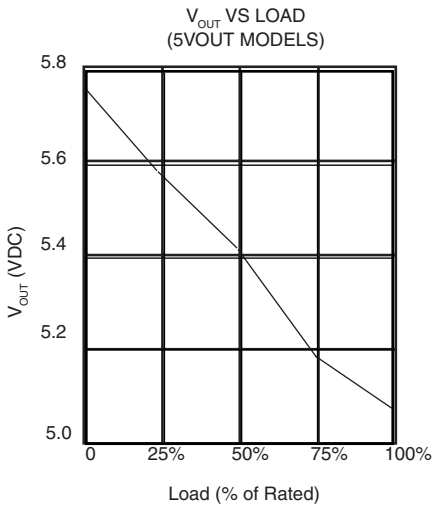

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 ISO 9001 and 14001 REGISTERED



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#):  
 Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2017 Murata Power Solutions, Inc.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [Murata](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [PSR152.5-7IR](#) [Q48T30020-NBB0](#) [AVO240-48S12B-6L](#) [AVO250-48S28B-6L](#) [NAN-0505](#) [HW-L16D](#) [JAHW100Y1](#) [217-1617-001](#) [22827](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#) [CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [PSE1000DCDC-12V](#) [RDS180245](#) [MAU228](#) [419-2065-201](#) [449-2075-101](#) [TME 0303S](#) [TME 0505S](#) [TME 1205S](#) [TME 1212S](#) [TME 2405S](#) [TME 2412S](#) [V300C24C150BG](#) [419-2062-200](#) [419-2063-401](#) [419-2067-101](#) [419-2067-501](#) [419-2068-001](#) [DCG40-5G](#) [DFC15U48D15](#) [449-2067-000](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-2415](#) [XKS-1215](#) [033456](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [TME 0509S](#)