


Datasheet of SAW Device

SAW Single Filter for GPS_GLONASS_BEIDOU / Unbalanced / 5pin /1109

Murata PN: SAFFB1G56AC0F0A

Feature

- Low Insertion Loss
- High Attenuation



Note: Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only.

Please also read caution at the end of this document.

Revision



General Information

- Operating temperature : -30 to +85 deg.C - Storage temperature : -40 to +85 deg.C

- Input Power : +15.0dBm 5000h +50deg.C (1)

+13.5dBm 5000h +50deg.C (2) +25.0dBm 5000h +50deg.C (3)

(1) applicable for W-CDMA, SC-FDMA, DFT-s-OFDM

617-915MHz, 1427-1510.9MHz, 1710-2690MHz, 3300-5000MHz

(2) applicable for CP-OFDM

617-915MHz, 1427-1510.9MHz, 1710-2690MHz, 3300-5000MHz

(3) applicable for GSM duty cycle 1:8

824-849MHz, 880-915MHz, 1710-1785MHz, 1850-1910MHz

- D.C. Volatage between the terminals : 3V (25+/-2 deg.C)

Minimum Resistance between the terminals : 10M ohm
 RoHS compliance : Yes

- ESD (ElectroStatic Discharge) sensitive device




unit: mm

SAFFB1G56AC0F0A (GPS_GLONASS_BEIDOU / Unbalanced / 5pin / 1109)

Package Dimensions & Recommended Land Pattern

Dimensions

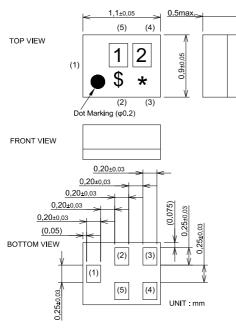

Marking: Laser Printing

*: Month code(Refer to the table A)

\$: Date code(Refer to the table B)

1:3 2:5


Terminal Number

(1): Unbalanced port(4): Unbalanced port


Others: GND

Notice) Please refer to Measurement Circuit for Port information in detail.

Land Pattern



Measurement Circuit (Top Thru View)

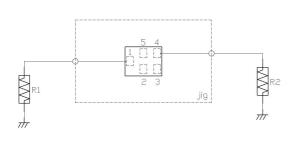

R1 : 50 ohm	
R2 : 50 ohm	



Electrical Characteristic < Item >


Liectrical Oria		<u> </u>	Characteristics							
	ltem				(-30 to +85 deg.C)			Unit	Note	
					min.		max.			
Center Frequency					1575.4	/1561.1	/1601.7	MHz		
Insertion Loss	1574.39	to	1576.45	MHz		1.1	1.4	dB		
	1574.39	to	1576.45			1.1	1.3	dB	+23 to +27deg.C	
	1559.05	to	1563.15			1.6	2.0	dB		
	1559.05	to	1563.15	MHz		1.6	1.8	dB	+23 to +27deg.C	
	1597.55	to	1605.89	MHz		1.6	2.0	dB		
ODT D: 1 D : (:	1597.55	to_	1605.89			1.6	1.8	dB	+23 to +27deg.C	
GDT Ripple Deviation	1597.55	<u>to</u>	1605.89			5	15	ns		
Ripple Deviation	1574.39 1559.05	to_	1576.45 1563.15			0.1	0.5 1.1	dB dB		
	1597.55	10	1605.89	MHz MHz		0.2	1.1	dB		
VSWR	1574.39	to_	1576.45	MHz		1.2	1.8	uБ		
V3WIK	1559.05	to	1563.15	MHz		1.6	1.8			
	1597.55	to	1605.89	MHz		1.5	1.8			
Absolute Attenuation		to	798.	MHz	45	47		dB		
		to	915.	MHz	45	47		dB		
		to	925.	MHz	45	47		dB		
		to	960.	MHz	45	48		dB		
		to	1463.	MHz	45	49		dB		
		to	1695.	MHz	44	53		dB		
	1695.	to	1710.	MHz	50	54		dB		
	1670.	to	1785.	MHz	51	55		dB		
	1710.	to	1785.	MHz	51	55		dB	DCS-Tx	
	1786.	to	1797.	MHz	51	56		dB		
		to	1910.	MHz	49	54		dB	PCS-Tx	
		to	1980.	MHz	48	53		dB		
		to	2025.	MHz	47	52		dB	В34Тх	
		to	2315.	MHz	45	49		dB	B30 Tx	
		to	2483.	MHz	41	45		dB	2.4G ISM	
		<u>to</u>	2570.	MHz	40	44		dB	B7 Tx	
		to_	3800. 4200.	MHz	30 28	33 32		dB dB	N78 N77	
		to_	5000.	MHz MHz	27	30		dВ	N79	
		to to	5950.	MHz	25	29		dB	5G ISM	
	3130.	lO	0000.	1011 12	20	20		u D	36 16101	
	-									


^{*} Typical value at 25±2deg.C



SAFFB1G56AC0F0A (GPS_GLONASS_BEIDOU / Unbalanced / 5pin / 1109) Electrical Characteristic



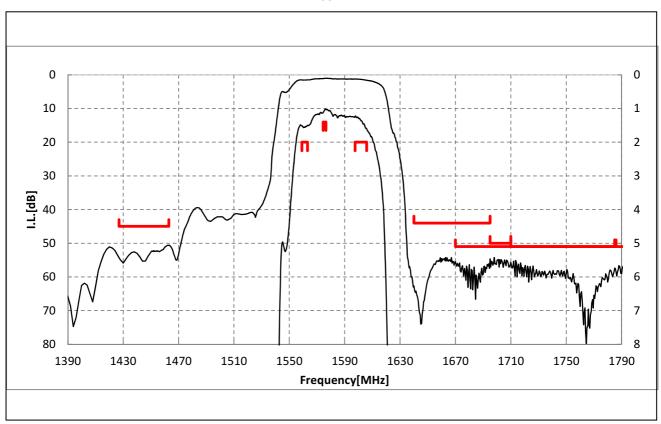


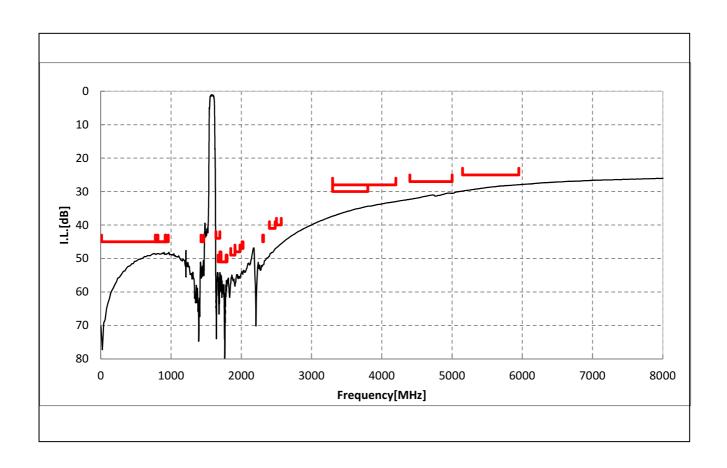




Dimensions of Tape & Reel unit: mm


Carrier Tape

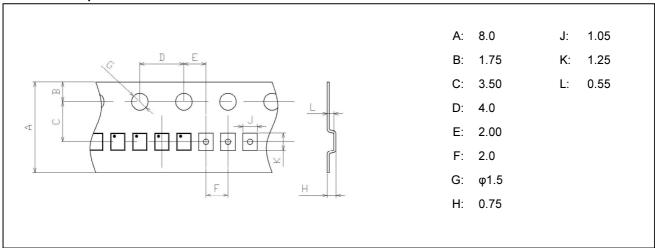

Tape

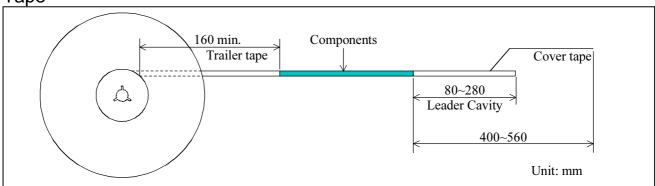

Reel

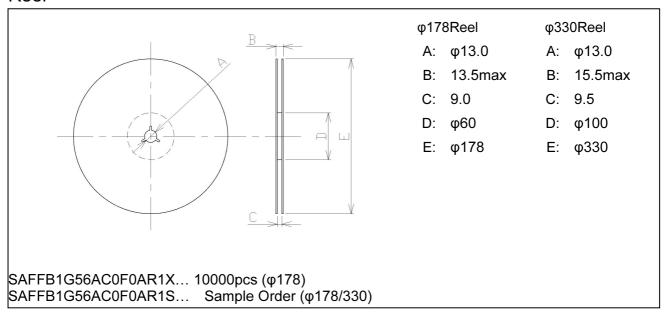



Marking Code

Table A: Month Code

2017	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2021 2025	Α	В	С	D	E	F	G	Н	J	K	L	М
2018	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2022 2026	N	Р	Q	R	S	T	U	V	W	X	Y	Z
2019	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2023 2027	а	b	ıc	d	е	f	g	h	j	k	Q	m
2020	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2024 2028	n	P	8	r	4	t	a	U	w	æ	y	8

Table B: Date Code

code	L	М	13th N	P	Q	R	S	T	U	V	04.1
date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	W	X	Y	Z	a	b	c	d	e	f	g

Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.



SAFFB1G56AC0F0A (GPS_GLONASS_BEIDOU / Unbalanced / 5pin / 1109) Important Notice (2/2)

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device.

When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use.

Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- •the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,
 - ·deviation or lapse in function of engineering sample,
 - ·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Murata manufacturer:

Other Similar products are found below:

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF HHS-109-PIN AFS14A35-1591.50-T3 DS-323-PIN JP510S LFB322G45SN1A504

SF2159E FM-104-PIN CER0813B MAPDCC0005 3A325 BD0810N50100AHF JHS-115-PIN DC0710J5005AHF DC2327J5005AHF

LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S CDBLB455KCAX39-B0 RF1353C 051157-0000

PD0922J5050D2HF 600S150FTRB 1E1305-3 1F1304-38 1G1304-30 TP-103-PIN BD1222J50200AHF BD1722J50100AHF

2450DP39K5400E BD0810J50150AHF BD1722J50200AHF DSS-113-PIN DS-327-PIN MACP-008125-CK07F0 DS-329-PIN DS-313-PIN M38510/10304BCA TP-104-PIN HH-128-PIN JP506S XC0900P-10S XC0900B-30S CHS-134-PIN CHE1260-QAG 11305-10 5962-9091202MXA