

ECO-RAIL-2 POWER SUPPLY 1-PHASE,

IN: 90 ... 132 VAC / 173 ... 264 VAC OUT: 24V/10ADC

INPUT: 90...132 V AC/173...264 V AC

OUTPUT: 23...28 V DC

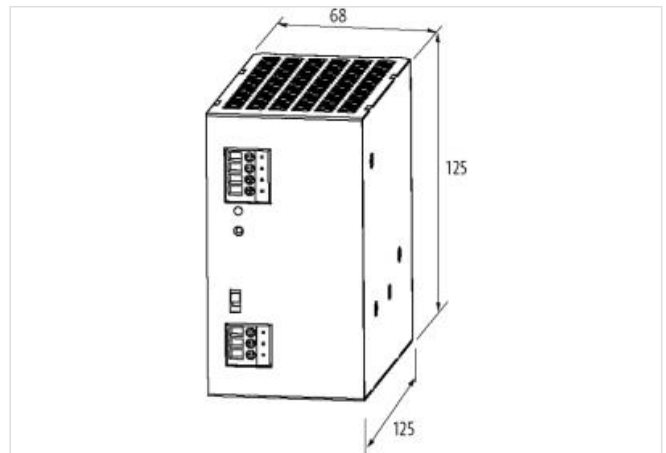
Current: 10 A

Min. mains failure bridging

min. 12 ms (115 V AC); min. 30 ms (230 V AC)

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27049002
ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-8.0	27049002
ECLASS-9.0	27040701
ECLASS-10.1	27040701
ECLASS-11.1	27040701
ECLASS-12.0	27040701
ETIM-5.0	EC002540
customs tariff number	85044083
GTIN	4048879694483
Packaging unit	1

Electrical data

Number of devices series connection max.	2
Parallel connection	no
Series connection	yes

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Fuse protection primary side internal	5 A
Characteristic back-up fuse	Inertia
Input voltage 1 AC	100 V
Input voltage 1 AC min.	90 V
Input voltage 1 AC max.	132 V
Input voltage 2 AC	240 V
Input voltage 2 AC min.	173 V
Input voltage 2 AC max.	264 V
Input current at input voltage 1 AC	4,3 A
Input current at input voltage 2 AC	2,1 A
Inrush current max.	18 A @ 230 V
Efficiency	86 % @ 115 V AC, 87 % @ 230 V AC

Electrical data | Output

Output voltage DC	24 V
Output voltage DC min.	23 V
Output voltage DC max.	28 V
Output voltage adjustable	yes
Output current	10 A
Ripple effective max.	10 mV
Spikes (s-s) max.	50 mV

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
Short-circuit protection output	yes
Overload protection output	yes

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	125 mm
Width	68 mm
Depth	125 mm

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	40 °C
Derating from	40 °C
Storage temperature min.	-20 °C
Storage temperature max.	85 °C
Relative humidity min. (operation)	20 %
Relative humidity max. (operation)	90 % no condensation

Conformities, approvals

Product standard	IEC 61010-2-201
EMC	EN 61000-3-2

Connection type 2

Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	3
PIN 1	PE
PIN 2	N
PIN 3	L
Connection	Spring clamp terminals FK

Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	4
PIN 1	-
PIN 2	-
PIN 3	+
PIN 4	+

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [Murr Elektronik](#) manufacturer:

Other Similar products are found below :

[PS-3015](#) [DVP01PU-S](#) [DVP06AD-S](#) [DVPPS02](#) [PS9Z-5R1G](#) [PS-C24024](#) [ADNB040-24-1PM-C](#) [SS14011524](#) [PSW-12024](#) [S8T-BUS03](#) [PS-S4024](#) [NTPS-24-1.3](#) [PS-10024](#) [PS-C12024](#) [PSP-480S24](#) [PS-C48024](#) [PS-C480P24](#) [PSC-2024](#) [PSC-4012](#) [PSC-4048](#) [PSC-9615](#) [PSC-15124](#) [PSC-15148](#) [PSC-24148](#) [PSC-48148](#) [PSS18/24/0.75](#) [PSS120/24/5](#) [PSD-A120W12](#) [NDR-7524](#) [NDR-12024](#) [AMED15-48SNZ-B](#) [AMED15-5SNZ-B](#) [AMED120-48SJZ](#) [AMED120-24SJZ](#) [AMED15-24SNZ-B](#) [AMED75-48SJZ](#) [1SVR427043R1200](#) [1110466](#) [50995](#) [50903](#) [50997](#)
[EL50-D](#) [18924-9989](#) [50996](#) [HDN-3024](#) [ISEDR-120-24](#) [1335699](#) [1335698](#) [LWR1601-6ER](#) [1170952](#)