

Mico Pro electronic circuit protection, 1 channel

IN: 24 V DC OUT: 24 V DC / 10 A


Mico Pro® fix 1.10
 1 channel
 Current adjustment 10 A
 Build your own Mico Pro® online:
[START](#)

Link to Product

Illustration



Product may differ from Image

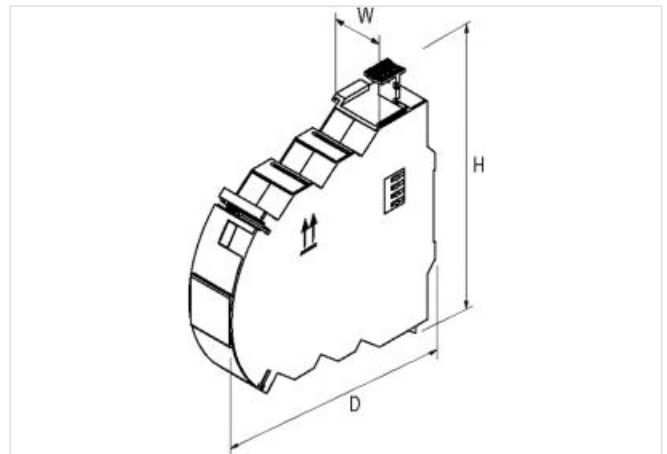

Commercial data

ECLASS-6.0	27371802
ECLASS-6.1	27371802
ECLASS-7.0	27371802
ECLASS-8.0	27371802
ECLASS-9.0	27371802
ECLASS-10.1	27371802
ECLASS-11.1	27371802
ECLASS-12.0	27371802
ETIM-5.0	EC001440
customs tariff number	85363010
GTIN	4048879552493
Packaging unit	1

Electrical data | Supply

Total current max.	40 A
--------------------	------

Electrical data | Input

Input voltage 1 DC	12 V
Input voltage 2 DC	24 V
Input voltage DC min.	9 V

Input voltage DC max.	30 V
Control options	via power module
Total current bridge set max.	40 A
System supply	via power module

Electrical data | Output

Number of output channels	1
Triggering current DC full load per channel	10 A
Switch-on capacity max.	30 mF
Tolerance trigger current min.	0 %
Tolerance trigger current max.	20 %

Installation

Connection cross-section static min.	0,2 mm ²
Connection cross section static max.	2,5 mm ²
Connection cross-section dynamic min.	0,2 mm ²
Connection cross section dynamic max.	4 mm ²
AWG number static min.	14
AWG number static max.	24
AWG number dynamic min.	12
AWG number dynamic max.	24

Installation | Connection

Connection	Bridge system
------------	---------------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
-------------------------------------	------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Height	130 mm
Width	8 mm
Depth	114 mm

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	55 °C
Storage temperature min.	-40 °C
Storage temperature max.	80 °C

Connection type 6

Family construction form	Bridging Contact
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	UB +
Family construction form	Bridging Contact
Gender	female
Color contact carrier	black
No. of poles	1
PIN 1	0 V
Family construction form	Bridging Contact
Gender	female
Color contact carrier	black
No. of poles	4
PIN 1	On
PIN 2	Ctrl

PIN 3	Alarm
PIN 4	0.9
Family construction form	Bridging Contact
Gender	male
Color contact carrier	black
No. of poles	4
PIN 1	On
PIN 2	Ctrl
PIN 3	Alarm
PIN 4	0.9
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	0 V 1
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	1
PIN 1	Out 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circuit Breakers](#) category:

Click to view products by [Murr Elektronik](#) manufacturer:

Other Similar products are found below :

[0185080.X](#) [0185100.XP](#) [0185150.XP](#) [0700005](#) [0700007](#) [0700010](#) [0700015](#) [0700020](#) [0700025](#) [0700030](#) [0700040](#) [0712107](#) [0712123](#)
[0712152](#) [0712194](#) [0712217](#) [0712233](#) [0712259](#) [0712275](#) [0712291](#) [0712314](#) [0900100](#) [0900113](#) [0900126](#) [0900207](#) [0900210](#) [0900317](#)
[0900333](#) [0900414](#) [0900618](#) [0900634](#) [0900812](#) [0901002](#) [0902030](#) [0902056](#) [0902072](#) [0902098](#) [0902108](#) [0902111](#) [0902124](#) [0902137](#)
[0902218](#) [0902221](#) [0902247](#) [0902263](#) [0902328](#) [0902331](#) [0902344](#) [0902409](#) [0902412](#)