


## Mico Pro Power module

IN: 24 V DC / 40A, 16mm<sup>2</sup> / Cover plate included (heavy duty)

Mico Pro® PM 24 V DC/40 A  
 Cover plate included (heavy duty)  
 Shock load  
 1/2 sin 40 g, 11 ms  
 Build your own Mico Pro® online:  
[START](#)

### Link to Product

#### Illustration

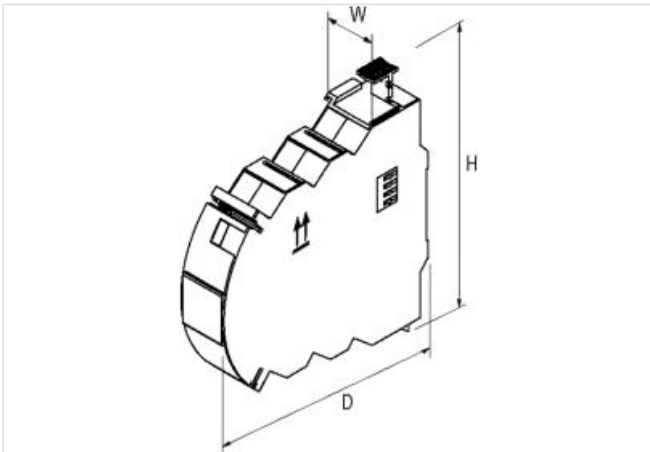

Product may differ from Image



#### Commercial data

|            |          |
|------------|----------|
| ECLASS-6.0 | 27371802 |
| ECLASS-6.1 | 27371890 |
| ECLASS-7.0 | 27371890 |

|                       |               |
|-----------------------|---------------|
| ECLASS-8.0            | 27371890      |
| ECLASS-9.0            | 27371802      |
| ECLASS-10.1           | 27371802      |
| ECLASS-11.1           | 27371802      |
| ECLASS-12.0           | 27371802      |
| ETIM-5.0              | EC001440      |
| customs tariff number | 85363030      |
| GTIN                  | 4048879552080 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                    |      |
|--------------------|------|
| Total current max. | 40 A |
|--------------------|------|

**Electrical data | Input**

|   |        |
|---|--------|
| CTRL input voltage control inputs high min. | 9 V    |
| CTRL input voltage control inputs high max. | 30 V   |
| CTRL signal                                 | ON/OFF |
| Input voltage 1 DC                          | 12 V   |
| Input voltage 2 DC                          | 24 V   |
| Input voltage DC min.                       | 9 V    |
| Input voltage DC max.                       | 30 V   |
| ON input voltage control inputs min.        | 9 V    |
| ON input voltage control inputs max.        | 30 V   |
| ON pulse length control inputs high min.    | 120 ms |
| Total current bridge set max.               | 40 A   |

**Electrical data | Output**

|                           |      |
|---------------------------|------|
| Switching voltage AC max. | 30 V |
| Switching voltage DC max. | 30 V |

**Installation**

|                                       |                      |
|---------------------------------------|----------------------|
| Connection cross-section static min.  | 0,75 mm <sup>2</sup> |
| Connection cross section static max.  | 16 mm <sup>2</sup>   |
| Connection cross-section dynamic min. | 0,75 mm <sup>2</sup> |
| Connection cross section dynamic max. | 16 mm <sup>2</sup>   |
| AWG number static min.                | 4                    |
| AWG number static max.                | 20                   |
| AWG number dynamic min.               | 4                    |
| AWG number dynamic max.               | 20                   |

**Installation | Connection**

|            |               |
|------------|---------------|
| Connection | Bridge system |
|------------|---------------|

**Device protection | Electrical**

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP20 |
|-------------------------------------|------|

**Device protection | Mechanical**

|                                      |                     |
|--------------------------------------|---------------------|
| Shock resistance (EN IEC 60068-2-27) | 40 g, 11 ms 1/2 sin |
|--------------------------------------|---------------------|

**Mechanical data | Mounting data**

|                            |                                |
|----------------------------|--------------------------------|
| Mounting method            | geschnappt                     |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| Height                     | 130 mm                         |
| Width                      | 24 mm                          |
| Depth                      | 114 mm                         |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 55 °C  |

|                          |        |
|--------------------------|--------|
| Storage temperature min. | -40 °C |
| Storage temperature max. | 80 °C  |

**Connection type 7**

|                          |                           |
|--------------------------|---------------------------|
| Family construction form | Bridging Contact          |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | UB In + 24 V DC           |
| Family construction form | Bridging Contact          |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 1                         |
| PIN 1                    | 0 V                       |
| Family construction form | Bridging Contact          |
| Gender                   | female                    |
| Color contact carrier    | black                     |
| No. of poles             | 4                         |
| PIN 1                    | On                        |
| PIN 2                    | Ctrl                      |
| PIN 3                    | Alarm                     |
| PIN 4                    | 0.9                       |
| Family construction form | Bridging Contact          |
| Gender                   | male                      |
| Color contact carrier    | black                     |
| No. of poles             | 4                         |
| PIN 1                    | On                        |
| PIN 2                    | Ctrl                      |
| PIN 3                    | Alarm                     |
| PIN 4                    | 0.9                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | 13 Alarm                  |
| PIN 2                    | 14 Alarm                  |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | 23 90%                    |
| PIN 2                    | 24 90%                    |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | green                     |
| No. of poles             | 2                         |
| PIN 1                    | Ctrl                      |
| PIN 2                    | On                        |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Circuit Breakers](#) category:*

*Click to view products by [Murr Elektronik](#) manufacturer:*

Other Similar products are found below :

[0185080.X](#) [0185100.XP](#) [0185150.XP](#) [0700005](#) [0700007](#) [0700010](#) [0700015](#) [0700020](#) [0700025](#) [0700030](#) [0700040](#) [0712107](#) [0712123](#)  
[0712152](#) [0712194](#) [0712217](#) [0712233](#) [0712259](#) [0712275](#) [0712291](#) [0712314](#) [0900100](#) [0900113](#) [0900126](#) [0900207](#) [0900210](#) [0900317](#)  
[0900333](#) [0900414](#) [0900618](#) [0900634](#) [0900812](#) [0901002](#) [0902030](#) [0902056](#) [0902072](#) [0902098](#) [0902108](#) [0902111](#) [0902124](#) [0902137](#)  
[0902218](#) [0902221](#) [0902247](#) [0902263](#) [0902328](#) [0902331](#) [0902344](#) [0902409](#) [0902412](#)