

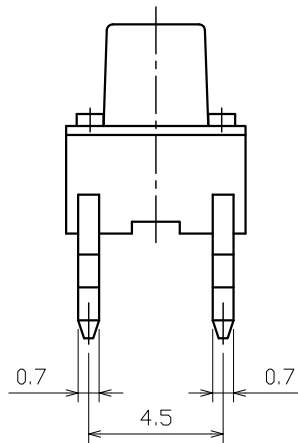



TERMINAL NO. ①

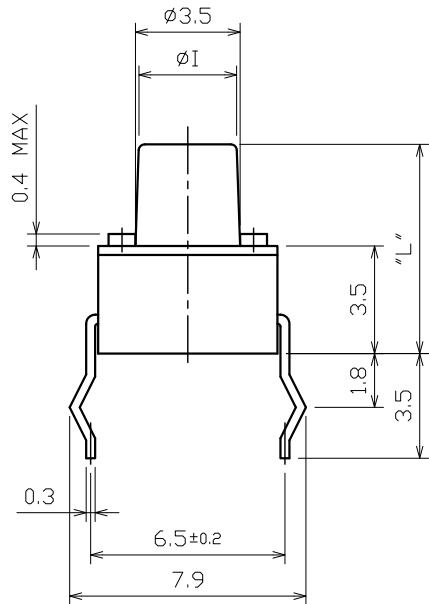

CIRCUIT DIAGRAM



P.C.B MOUNTING HOLE DIMENSION

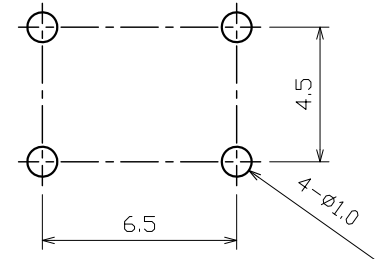

NOTE.

1. Rating : Dc 12V, 50mA
2. TRAVEL : 0.25 ± 0.1mm
3. CONTACT RESISTANCE : 100mΩ
4. GENERAL TOLERANCE : ± 0.3
5. MANUFACTURING SPECIFICATION WOULD BE ACCORDANCE WITH JTO138

Models.	Code No.	" L "	" I "	Stem color	O/Force
JT-1230X	130010000044	4.3	3.5	DARK GRAY	130 ± 30 gf
JT-1230A	130010000047	5.0	3.5	BLACK	160 ± 50 gf
JT-1230B	130010000053	9.5	3.1	BLACK	160 ± 50 gf
△③ JT-1230-01	130010000081	4.5	3.5	LIGHT GRAY	160 ± 50 gf
△③ JT-1230-02	130010000097	6.0	3.3	GREEN	160 ± 50 gf
△③ JT-1230-03	130010000098	6.5	3.3	LIGHT GRAY	160 ± 50 gf
△③ JT-1230	130010000048	4.3	3.5	BLACK	160 ± 50 gf
△③ JT-1230F	130010000049	7.0	3.34	BLUE	160 ± 50 gf

△③	모델 파생	08.12.26	W.K.JEONG
△③	모델 파생	08.04.04	W.K.JEONG
△①	JT-1230 Series 도면 사양 정리(QNA 요청)	06.11.03	W.K.JEONG
RevNo.	Revision note	Date	Signature

Itemref	Quantity	Title/Name, designation, material, dimension etc				Article No./Reference
Designed by	Checked by	Approved by	File name	Date	Scale	
w.k.jeong		t.h.oh		2006.11.03		
Model name			Part name			
TACTILE SWITCH			ASSEMBLY			
Model no.		Code no.	Edition	Sheet		
JT-1230 SERIES		CODE No.		1		

	SPECIFICATION	PAGE
	TACT SWITCH	1/4

1. Temperature range

1.1 Storage Temperature range -25°C to 70°C

1.2 Temperature range for use -15°C to 60°C

2. Test circumstance condition

2.1 Ambient temperature 16°C

2.2 Relative humidity 63% to 74%

2.3 Air pressure 102KPA

3. Appearance, Structure and Dimension




3.1 Appearance : Functionally free from rust, crack and bad plating.

3.2 Structure and Dimension : Reference per attached outline drawing.

4. Rating : DC 12V 50mA

5. Mechanical performance

Items		Test conditions	Requirements
5.1	Press force	Placing the switch such that the direction of switch operation is vertical, and then gradually increasing the load applied to the center of the knob the maximum load for the knob to come to a stop shall be measured.	As per individual manufactured Drawing
5.2	Travel	Placing the switch such that the direction of switch Operation is vertical and then applying a static load twice the operating force to the center of the knob, the travel distance for the knob to come to a stop shall be measured.	0.25±0.1mm
5.3	Return force	The sample switch is installed such that the direction of switch operation is vertical, and upon depression of knob in its center the whole travel distance, the force of the knob to return to its free position shall be measured.	130gf : 50 ±20gf 160gf ; greater than 40gf

						APPD	CHKD	DSGN	TITLE
									JT-1230 SERIES
									DOCUMENT NO.
ZONE	SYMB	DATE	APPD	CHKD	DSGD				JT 0138

		SPECIFICATION	PAGE
		TACT SWITCH	2/4
5.4	Actuator strength	To the press direction 10N until the stop for 5 sec	Item 5.1, 6.1 to 6.3 shall be satisfied. Without damage of actuator. Function and action is in gear.
5.5	Connection Port Strength	To any the connection place pull 5N, 10±1sec	Without damage of connection. Port function and action is in gear
5.6	Solder-Ability	An hour later, the steam ageing. The soldering area of the terminal shall be immersed into molten solder at a temperature of 235±5℃ for 2±0.5sec	More than 90% of the dipping part shall be covered by solder
5.7	Soldering heat resistance	The soldering area of the terminal shall be immersed into molten solder at a temperature of 260±5℃ for 5 sec	1)There shall not be deforming in appearance 2)The requirements specified in Item 5.1, 6.1 to 6.3 shall be satisfie.

6. Electrical performance

6.1	Contact Resistance	Rating : DC 5V      Current : 100±2mA	100mΩ (Max)
6.2	Insulation Resistance	A voltage of 100V. DC shall be applied for 1 min after which measurement shall be made	Between terminals
			Between individual terminal and frame
6.3	Withstand Voltage	250V.AC/50Hz for 1min,	Between terminals
			Between individual terminal and frame
6.4	Librate	Librate frequency:10-500Hz Swing : Extent cost displacement should be 0.35mm; The accelerated extent cost should be 50m/s <sup>2</sup> . The scan time: 11 minutes once a time. Do it for five times.	Item 6.1 shall be satisfied, the façade of the switch have no abnormity, motion and function is good

						APPD	CHKD	DSGN	TITLE
									JT-1230 SERIES
									DOCUMENT NO.
ZONE	SYMB	DATE	APPD	CHKD	DSGD				JT 0138

	SPECIFICATION	PAGE
	TACT SWITCH	3/4

7. Weatherability

	PROPERTY	TEST CONDITION	PERFORMANCE	
7.1	Invaria-Blenes Damp Heat	Switch for test shall be Stored at a temperature $40 \pm 2^\circ\text{C}$ , and a relative humidity of 90-95% for 96 hours. Then the switch shall be maintained at standard atmospheric conditions for an hour after which measurement shall be made within 96hour.	Contact resistance. Refer to Item 6.1	100m $\Omega$ or less
			Insulation resistance. Refer to Item 6.2	100M $\Omega$ (Max)
			Withstand voltage. Refer to Item 6.3	No arcing or break down shall occur.
			Operating force and Appearance	Item 5.1 shall be satisfied, there shall be no deformation or cracks in molded part or excessive rust and discoloration
7.2	Dry heat proof	Switch for test shall be stored at a temperature of $70 \pm 2^\circ\text{C}$ for 72 hours, and at standard atmospheric Conditions for 1 hour then to be measured within 1 hour.	The Item 3.1, 5.1, 6.1 to 6.3 shall be satisfied	
7.3	Cold proof	Switch for test shall be stored at a temperature of $-25 \pm 3^\circ\text{C}$ for 16 hours, and at standard atmospheric Conditions for 1hour then to be measured within 1 hour.		

8. Durability

8.1	Life Test	100,000 cycles of a knob operation shall be performed continuously at a rate of 2~3 cycles/sec	Press force. Refer to Item 5.1	$\pm 30\%$ of initial force
			Contact resistance. Refer to Item 6.1	200m $\Omega$ (Max)
			Insulation resistance. Refer to Item 6.2	100M $\Omega$ or more
			Withstand voltage. Refer to Item 6.3	No arcing or Break down shall occur

						APPD	CHKD	DSGN	TITLE
									JT-1230 SERIES
									DOCUMENT NO.
ZONE	SYMB	DATE	APPD	CHKD	DSGD				JT 0138

	SPECIFICATION	PAGE
	TACT SWITCH	4/4

9. Soldering conditions	
9.1	<p>Hand soldering</p> <p>Please practice according to below condition:  (1) Soldering temperature: 260°C Max  (2) Continuous soldering time: 5s Max  (3) Capacity of soldering iron: 20W Max</p>
9.2	<p>Automatic flow soldering</p> <p>For the product of SMD, in case an automatic flow soldering apparatus is used for soldering adhere to the following conditions:</p> <p>Copper foil surface temperature</p> <p style="text-align: center;">Time inside soldering equipment</p>
9.3	<p>Automatic flow soldering</p> <p>(1) Preheat: Temperature on the copper foil surface should reach preheat maximum temperature of 180°C within 2min ± 0.3min after the PWB entered into the soldering equipment.  (2) Soldering: Temperature on the copper foil surface should reach the peak temperature of 260°C within 10 seconds max. after the PWB entered into soldering heat zone  (3) Caution: The condition mentioned above is a temperature on the PWB surface on which parts are mounted. There are cases where PWB temperature greatly differs from switch's surface temperature depending on PWB material, size, thickness, etc. Care, therefore, should be used not to allow switch's surface temperature to exceed 260°C</p>

						APPD	CHKD	DSGN	TITLE
									JT-1230 SERIES
									DOCUMENT NO.
ZONE	SYMB	DATE	APPD	CHKD	DSGD				JT 0138

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Tactile Switches](#) category:*

*Click to view products by [NAMAE](#) manufacturer:*

Other Similar products are found below :

[6407-250V-25273P](#) [ADTSA62NV](#) [B3F-3123](#) [1977177-8](#) [1977266-1](#) [ADTSA63NV](#) [ADTSM21NSVTR](#) [ADTSM25RVTR](#) [ADTSM32NVTR](#)  
[ADTSMW64RV](#) [1977120-6](#) [FSMRA4JHA04](#) [GS4.70F300QP](#) [KSC241J SP DELTA LFS](#) [3FTL600RAS](#) [3FTL640RAS](#) [6407-250V-25343P](#)  
[ADTSM31NVTR](#) [2-1977120-7](#) [TSJW-5.2-260-TR](#) [Y651050400P](#) [KMT011MNGJLHS](#) [70-201.0](#) [ADTSG648NV](#) [ADTSM62KSVTR](#)  
[ADTSM648NV](#) [95C06E3RAT](#) [3ATH9Q](#) [FSMRA8JHA04](#) [HARS0073](#) [Y33R411N9FPLFT](#) [Y33R51139FPLFT](#) [Y31C01402FPLFS](#)  
[PTS645SK50SMTR92](#) [ADTSM32NVB](#) [KMS233GPWTLFG](#) [Y78B64124FP](#) [Y31CJ244KFP LFS](#) [Y96D113G0FP LFS](#) [Y33A812C5FP LFT](#)  
[Y56B2D120FP LFS](#) [Y31C5144KFP LFS](#) [PTS645 DVM83-BN125-2 LFS](#) [B3W 1000G](#) [KSC621G OL LFS](#) [B3F 1002C](#) [B3F 0047H](#) [B3W](#)  
[1002C](#) [B3F 5001G](#) [B3W 1100C](#)