

20V N-Channel Enhancement Mode MOSFET

Description

The NP2018DR uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 2.5V. This device is suitable for use as a load switch or in PWM applications.

General Features

- ◆ $V_{DS} = 20V$, $I_D = 16A$
 $R_{DS(ON)}(Typ.) = 8.6m\Omega$ @ $V_{GS} = 4.5V$
 $R_{DS(ON)}(Typ.) = 10.7m\Omega$ @ $V_{GS} = 2.5V$
- ◆ High power and current handling capability
- ◆ Lead free product is acquired
- ◆ Surface mount package

Application


- ◆ PWM applications
- ◆ Load switch

Package

- ◆ DFN2*2-6L-B



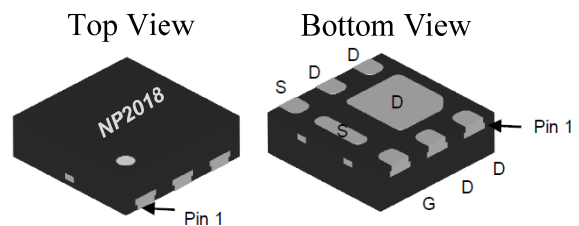
Schematic diagram



Marking and pin assignment

DFN2*2-6L-B

(Thickness 0.55mm)



Ordering Information

Part Number	Storage Temperature	Package	Devices Per Reel
NP2018DR-G	-55°C to +150°C	DFN2*2-6L-B	4000

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

parameter	symbol	limit	unit
Drain-source voltage	V_{DS}	20	V
Gate-source voltage	V_{GS}	±12	V
Drain current-continuous ^a @Tj=125°C -pulse ^b	I_D	16	A
	I_{DM}	64	A
Drain-source Diode forward current	I_S	16	A
Maximum power dissipation	P_D	18	W
Operating junction Temperature range	T_j	-55—150	°C

Electrical Characteristics (TA=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
OFF Characteristics						
Drain-source breakdown voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	20	-	-	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =20V, V _{GS} =0V	-	-	1	μA
Gate-body leakage	I _{GSS}	V _{DS} =0V, V _{GS} =±12V	-	-	±100	nA
ON Characteristics						
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.45	1	1.55	V
Drain-source on-state resistance	R _{DS(ON)}	V _{GS} =4.5V, I _D =8A	-	8.6	9.5	mΩ
		V _{GS} =2.5V, I _D =8A	-	10.7	12.5	
Forward transconductance	g _{fs}	V _{GS} =5V, I _D =16A	-	10	-	S
Dynamic Characteristics						
Input capacitance	C _{ISS}	V _{DS} =10V, V _{GS} =0V f=1.0MHz	-	955	-	pF
Output capacitance	C _{OSS}		-	142	-	
Reverse transfer capacitance	C _{RSS}		-	122	-	
Switching Characteristics						
Turn-on delay time	t _{D(ON)}	V _{DD} =10V I _D =16A V _{GEN} =4.5V R _{GEN} =6Ω	-	10	20	ns
Rise time	t _r		-	11	25	
Turn-off delay time	t _{D(OFF)}		-	35	70	
Fall time	t _f		-	30	60	
Total gate charge	Q _g	V _{DS} =10V, I _D =16A V _{GS} =4.5V	-	24	-	nC
Gate-source charge	Q _{gs}		-	1.2	-	
Gate-drain charge	Q _{gd}		-	3.7	-	
DRAIN-SOURCE DIODE CHARACTERISTICS						
Diode forward voltage	V _{SD}	V _{GS} =0V, I _S =16A	-	-	1	V

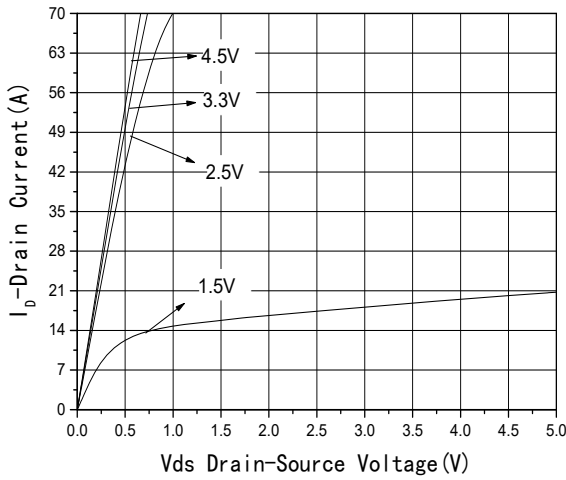
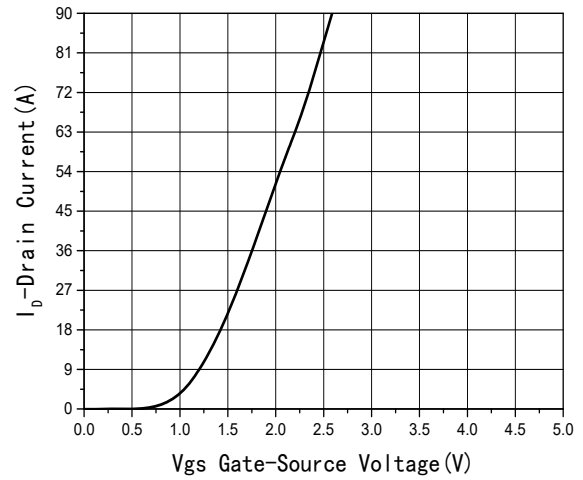
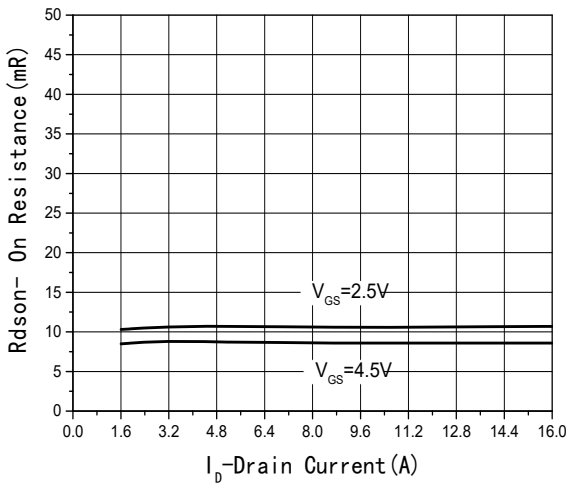
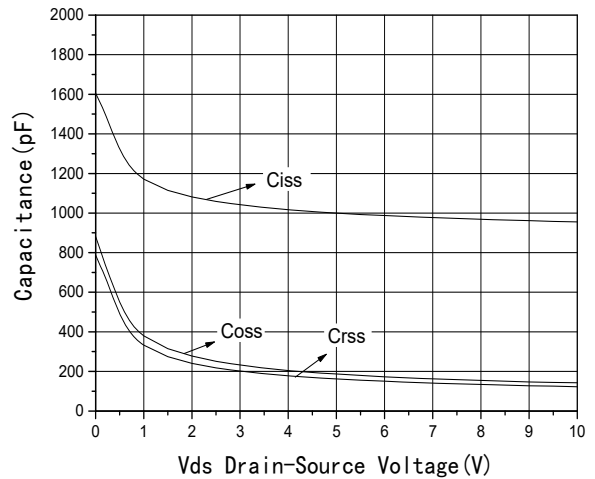
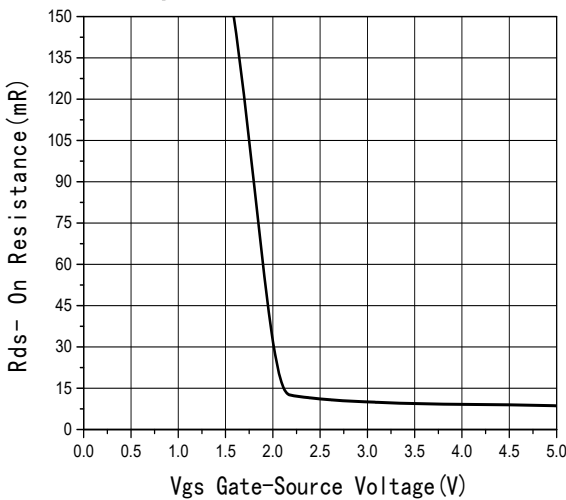
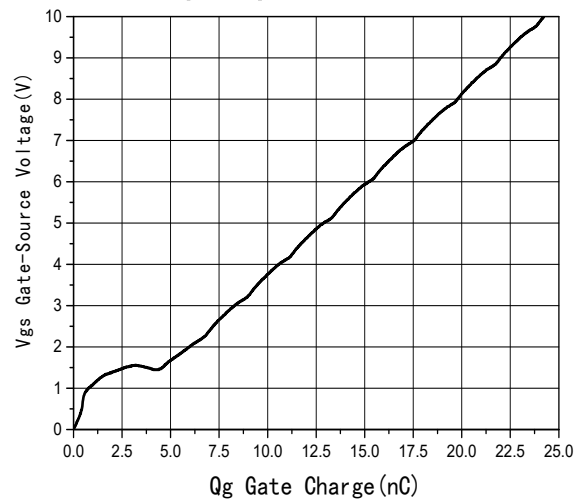
Notes:

- surface mounted on FR4 board, t≤10sec
- pulse test: pulse width≤300μs, duty≤2%
- guaranteed by design, not subject to production testing

Thermal Characteristics

Thermal Resistance junction-to ambient	R _{th JA}	100	°C/W
--	--------------------	-----	------

Typical Performance Characteristics


Fig1 Output Characteristics

Fig2 Transfer Characteristics

Fig3 $R_{DS(on)}$ -Drain current

Fig4 Capacitance vs V_{DS}

Fig5 $R_{DS(on)}$ -Gate Drain voltage

Fig6 Gate Charge

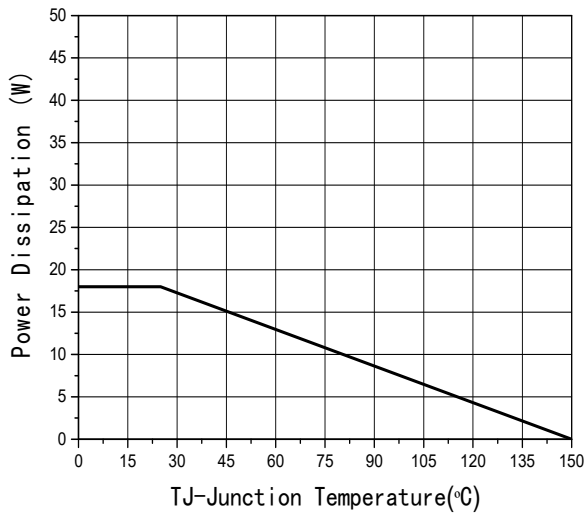


Fig7 Power De-rating

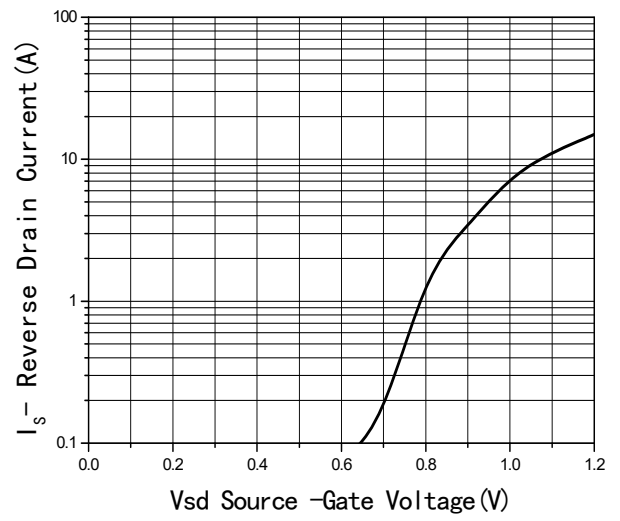
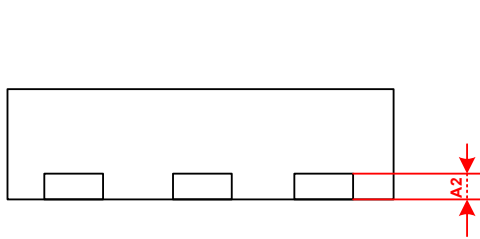
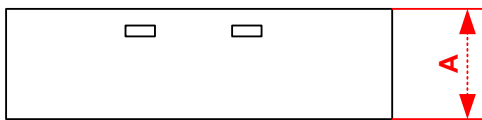


Fig8 Source-Drain Diode Forward

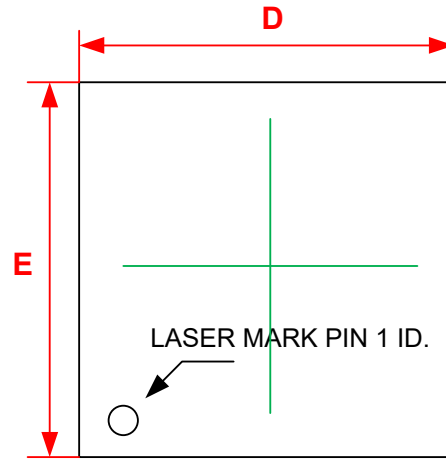
Package Information

 ● **DFN2*2-6L-B**


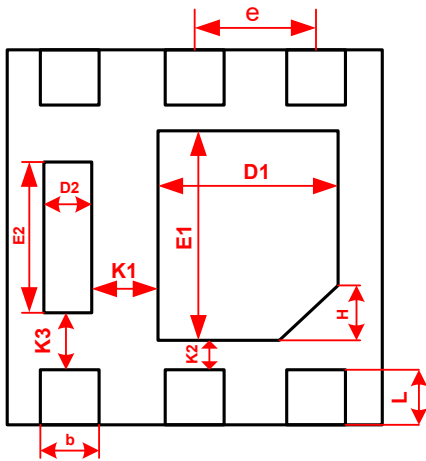
SIDE VIEW



SIDE VIEW



TOP VIEW



BOTTOM VIEW

Common Dimension (mm)			
PKG	DFN2020-6L-B		
SYMBOL	MIN.	MON.	MAX.
A	0.527	0.552	0.577
A2		0.127REF	
b	0.25	0.30	0.35
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D1	0.85	0.95	1.05
E1	1.05	1.15	1.25
D2	0.20	0.25	0.30
E2	0.69	0.79	0.89
e	0.55	0.65	0.75
H	0.25	0.30	0.35
K1	0.25MIN		
K2	0.15MIN		
K3	0.20MIN		
L	0.20	0.25	0.30

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [NATLINEAR](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-](#)
[7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#) [IPS60R1K0PFD7SAKMA1](#)
[IPS60R360PFD7SAKMA1](#) [IPS60R600PFD7SAKMA1](#)