

## P-Channel Enhancement Mode MOSFET

### Description

The NP2301A uses advanced trench technology to provide excellent  $R_{DS(ON)}$ , low gate charge and operation with gate voltages as low as 1.8V. This device is suitable for use as a load switch or in PWM applications.

### General Features

- ◆  $V_{DS} = -20V$ ,  $I_D = -2.8A$   
 $R_{DS(ON)}(Typ.) = 79m\Omega$  @  $V_{GS} = -2.5V$   
 $R_{DS(ON)}(Typ.) = 64m\Omega$  @  $V_{GS} = -4.5V$
- ◆ High power and current handling capability
- ◆ Lead free product is acquired
- ◆ Surface mount package


### Application

- ◆ PWM applications
- ◆ Load switch

### Package


- ◆ SOT-23

### Schematic diagram



### Marking and pin assignment

SOT-23  
(Topview)

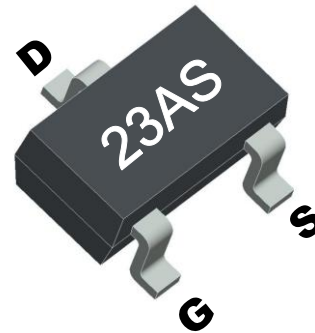

### Ordering Information

Part Number	Storage Temperature	Package	Devices Per Reel
NP2301AVR	-55°C to +150°C	SOT-23	3000

### Absolute Maximum Ratings (TA=25°C unless otherwise noted)

parameter	symbol	limit	unit
Drain-source voltage	$V_{DS}$	-20	V
Gate-source voltage	$V_{GS}$	±12	V
Drain current-continuous <sup>a</sup> @Tj=125°C -pulse $d^b$	$I_D$	-2.8	A
	$I_{DM}$	-11	A
Drain-source Diode forward current	$I_S$	-1.25	A
Maximum power dissipation	$P_D$	1	W
Operating junction Temperature range	$T_j$	-55—150	°C

**Electrical Characteristics** (TA=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>OFF Characteristics</b>						
Drain-source breakdown voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=-250\mu A$	-20	-	-	V
Zero gate voltage drain current	$I_{DSS}$	$V_{DS}=-20V, V_{GS}=0V$	-	-	-1	$\mu A$
Gate-body leakage	$I_{GSS}$	$V_{DS}=0V, V_{GS}=\pm 12V$	-	-	$\pm 100$	nA
<b>ON Characteristics</b>						
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	-0.4	-0.65	-1.2	V
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=-4.5V, I_D=-2.8A$	-	64	90	m $\Omega$
		$V_{GS}=-2.5V, I_D=-2.8A$	-	79	120	
Forward transconductance	$g_{fs}$	$V_{GS}=-5V, I_D=-5A$	-	5	-	S
<b>Dynamic Characteristics</b>						
Input capacitance	$C_{ISS}$	$V_{DS}=-10V, V_{GS}=0V$ $f=1.0MHz$	-	561	-	pF
Output capacitance	$C_{OSS}$		-	61	-	
Reverse transfer capacitance	$C_{RSS}$		-	52	-	
<b>Switching Characteristics</b>						
Turn-on delay time	$t_{D(on)}$	$V_{DD}=-10V$ $I_D=-2.8A$ $V_{GEN}=-4.5V$ $R_L=10ohm$ $R_{GEN}=-60ohm$	-	12.5	-	ns
Rise time	$t_r$		-	6.6	-	
Turn-off delay time	$t_{D(off)}$		-	113	-	
Fall time	$t_f$		-	46.6	-	
Total gate charge	$Q_g$	$V_{DS}=-10V, I_D=-3A$ $V_{GS}=-4.5V$	-	6.1	-	nC
Gate-source charge	$Q_{gs}$		-	1.7	-	
Gate-drain charge	$Q_{gd}$		-	1.2	-	
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>						
Diode forward voltage	$V_{SD}$	$V_{GS}=0V, I_S=-1.25A$	-	-0.81	-1.2	V


**Notes:**

- surface mounted on FR4 board,  $t \leq 10sec$
- pulse test: pulse width  $\leq 300\mu s$ , duty  $\leq 2\%$
- guaranteed by design, not subject to production testing


**Thermal Characteristics**

Thermal Resistance junction-to ambient	Rth JA	100	$^{\circ}C/W$
--	--------	-----	---------------


## Typical Performance Characteristics

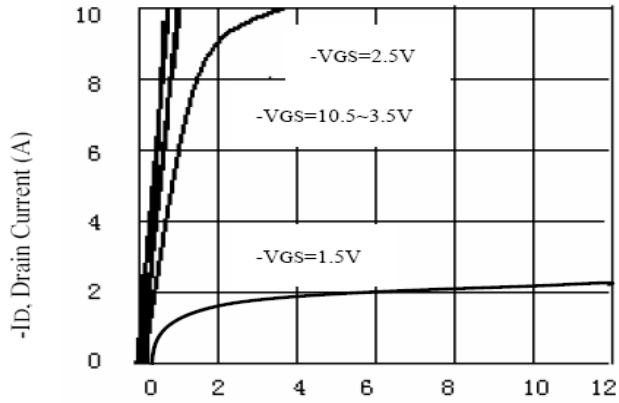

-  $V_{DS}$ , Drain-to-Source Voltage (V)  
Figure 1. Output Characteristics

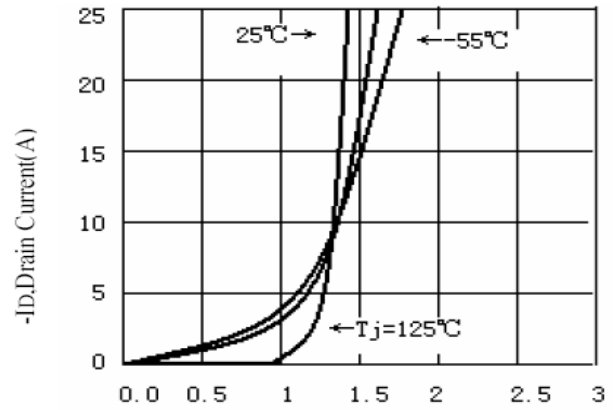

-  $V_{GS}$ , Gate-to-source Voltage (V)  
Figure 2. Transfer Characteristics

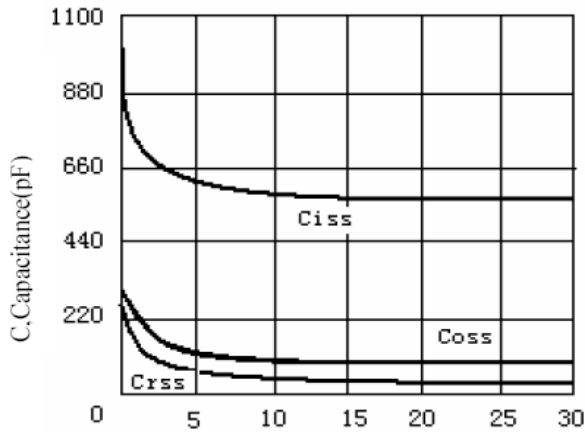

-  $V_{GS}$ , Drain-to Source Voltage  
Figure 3. Capacitance



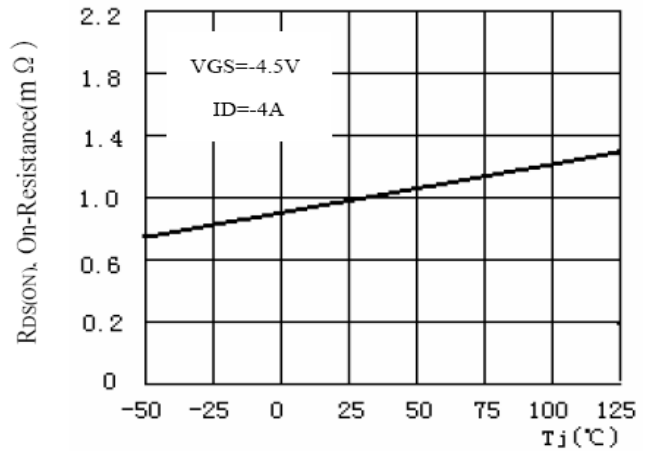



Figure 4. On-Resistance Variation with Temperature

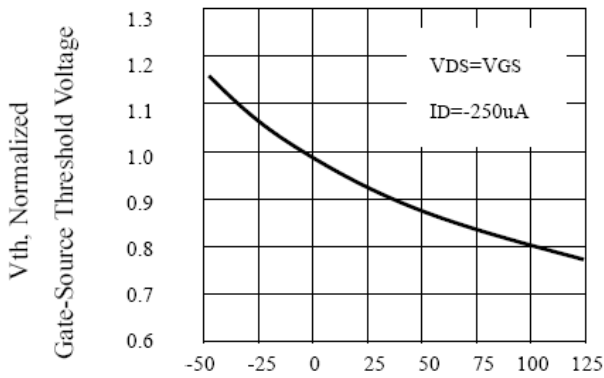

$T_j$ , Junction Temperature ( $^\circ\text{C}$ )  
Figure 5. Gate Threshold Variation With Temperature

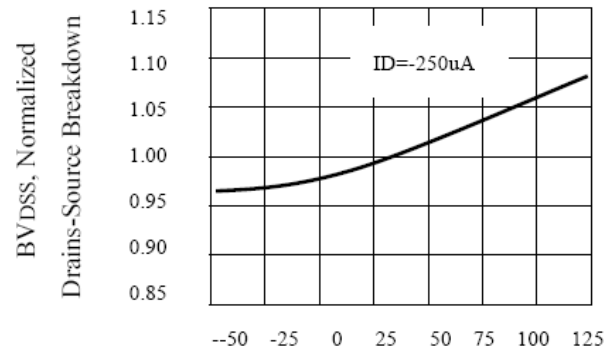


$T_j$ , Junction Temperature ( $^\circ\text{C}$ )  
Figure 6. Breakdown Voltage Variation With Temperature

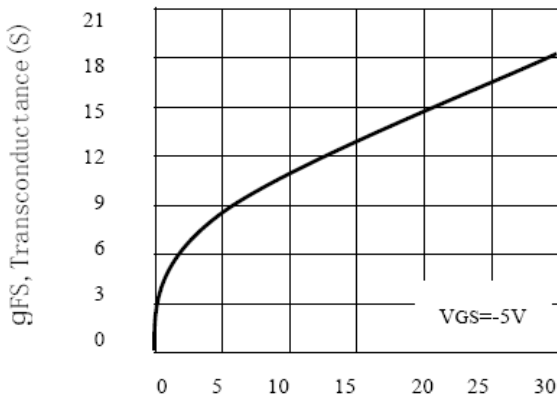


-IDS, Drain-Source Current (A)

Figure7. Transconductance Variation With Drain Current

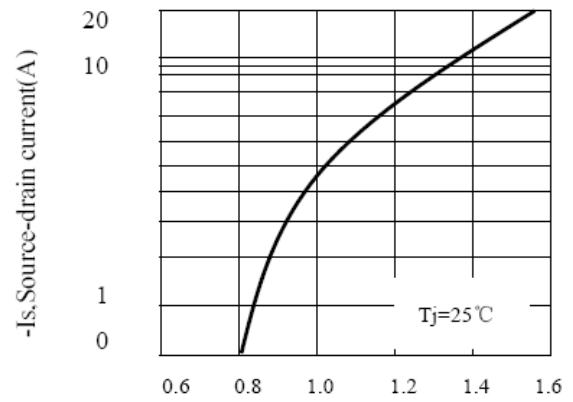


-VSD, Body Diode Forward Voltage

Figure8. Body Diode Forward Voltage Variation with Source Current

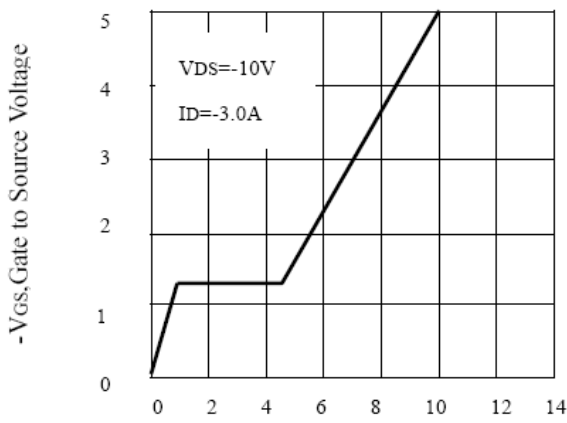

Qg, Total Gate Charge (nC)

Figure9. Gate Charge

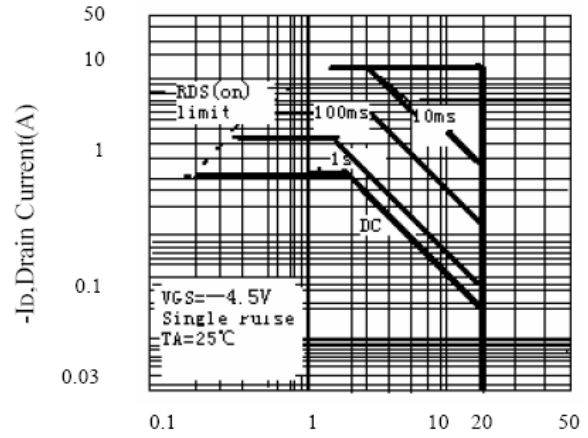


-VDS, Drain-Source Voltage(V)

Figure10. Maximum Safe Operating Area

## Package Information

- SOT-23

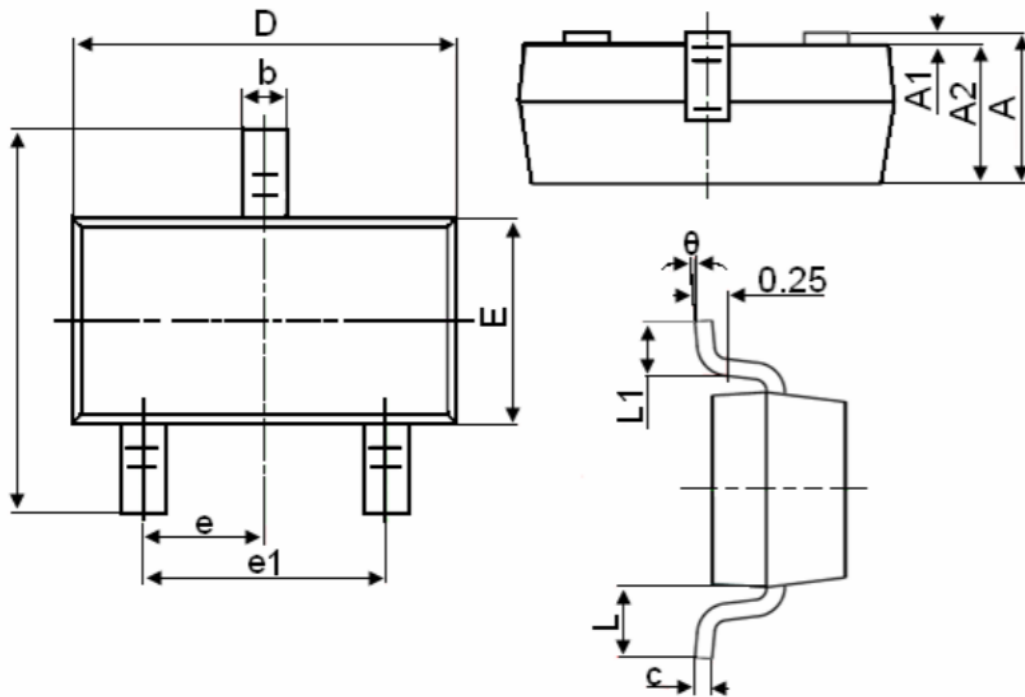

Symbol	Dimensions in Millimeters	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
$\theta$	0°	8°

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [NATLINEAR](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)  
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)  
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)  
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)  
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)  
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#) [SLF10N65ABV2](#)  
[BSO203SP](#) [BSO211P](#) [IPA60R230P6](#) [IPA60R460CE](#)