

12V P-Channel Enhancement Mode MOSFET

Description

The NP60P012D3 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. It can be used in a wide variety of applications.

General Features

- ◆ $V_{DS} = -12V$, $I_D = -60A$
 $R_{DS(ON)}(\text{Typ.}) = 4.8m\Omega$ @ $V_{GS} = -4.5V$
 $R_{DS(ON)}(\text{Typ.}) = 6.3m\Omega$ @ $V_{GS} = -2.5V$
- ◆ High density cell design for ultra low $R_{DS(on)}$
- ◆ Fully characterized avalanche voltage and current
- ◆ Good stability and uniformity with high E_{AS}
- ◆ Excellent package for good heat dissipation
- ◆ Special process technology for high ESD capability
- ◆ 100% UIS tested

Application


- ◆ Automotive applications
- ◆ Hard switched and high frequency circuits
- ◆ Uninterruptible power supply

Package



- ◆ PDFN3.3*3.3-8L


Schematic diagram



Marking and pin assignment

PDFN3.3*3.3-8L

(Top View)

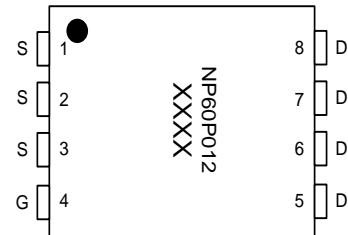

XXXX—Wafer Information

Ordering Information

Part Number	Storage Temperature	Package	Devices Per Reel
NP60P012D3-G	-55°C to +150°C	PDFN3.3*3.3-8L	5000

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

parameter	symbol	limit	unit
Drain-source voltage	V_{DS}	-12	V
Gate-source voltage	V_{GS}	± 12	V
Continuous Drain Current TC=25°C	I_D	-60	A
TC=100°C		-40	
Pulsed Drain Current	I_{DP}	-180	A
Avalanche energy(L=0.5mH) ^(note1)	E_{AS}	200	mJ
Maximum power dissipation	P_D	28	W
Operating junction Temperature range	T_j	-55—150	°C

Electrical Characteristics (TA=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	BV _{DSS}	V _{GS} =0V, I _D =-250μA	-16	-	-	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =-12V, V _{GS} =0V	T _J =25°C	-	-	-1
			T _J =85°C	-	-	-5
Gate Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V	-	-	±100	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-0.5	-0.70	-1.2	V
Drain-source on-state resistance ¹	R _{DS(ON)}	V _{GS} =-4.5V, I _D =-20A	-	4.8	6	mΩ
		V _{GS} =-2.5V, I _D =-20A	-	6.3	8	
On Status Drain Current	I _{D(ON)}	V _{DS} =-20V, V _{GS} =-4.5V	60	-	-	A
Diode Characteristics						
Diode Continuous Forward Current	I _S		-	-	60	A
Reverse Recovery Time	t _{rr}	I _F =-20A, dI/dt=20A/us	-	25	-	ns
Reverse Recovery Charge	Q _{rr}		-	24	-	nC
Dynamic Characteristics²						
Input capacitance	C _{ISS}	V _{GS} =0V, V _{DS} =-6V f=1.0MHz	-	4572	-	pF
Output capacitance	C _{OSS}		-	745	-	
Reverse transfer capacitance	C _{RSS}		-	670	-	
Turn-on delay time	t _{D(ON)}	V _{GS} =-4.5V, V _{DD} =-6V, I _D =-2A	-	6.5	-	ns
Turn-on Rise time	tr		-	17	-	
Turn-off delay time	t _{D(OFF)}		-	29.5	-	
Turn-off Fall time	tf		-	17	-	
Total gate charge	Q _g	V _{GS} =-4.5V, I _D =-20A V _{DS} =-6V	-	88	-	nC
Gate-source charge	Q _{gs}		-	9.3	-	
Gate-drain charge	Q _{gd}		-	10.2	-	
Drain-Source Diode Characteristics						
Diode forward voltage	V _{SD}	I _{SD} =-10A, V _{GS} =0V	-	0.8	1.2	V

Note: 1: Eas test: VDD=8V, RG=25ohm, L=500uH

2: Pulse test; pulse width ≤ 300ns, duty cycle ≤ 2%.

3: Guaranteed by design, not subject to production testing.

Typical Performance Characteristics

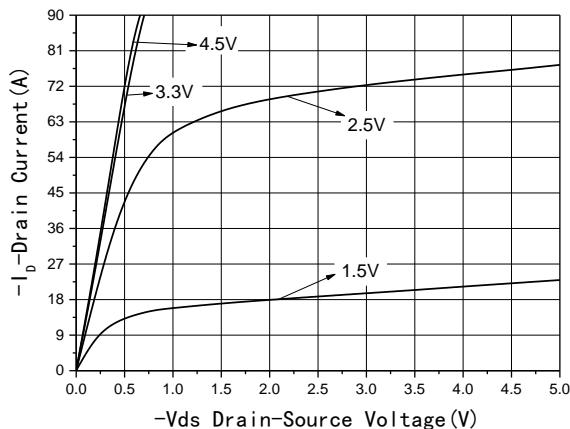


Fig1 Output Characteristics

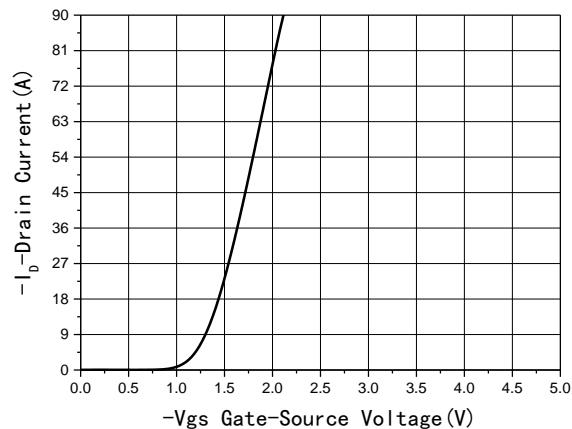


Fig2 Transfer Characteristics

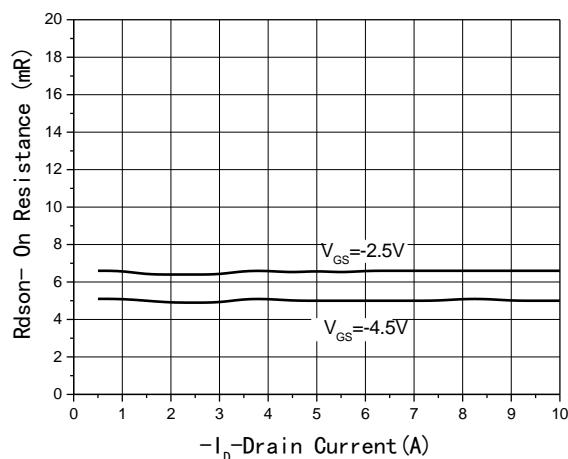


Fig3 Rdson-Drain current

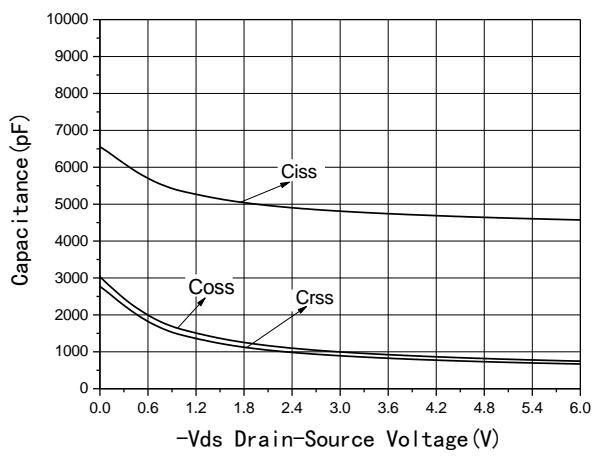


Fig4 Capacitance vs Vds

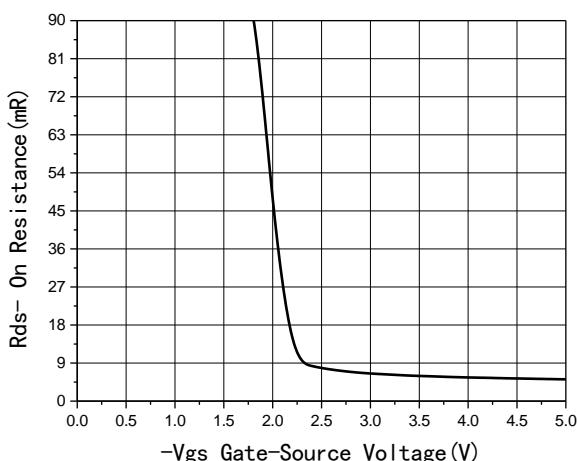


Fig5 Rdson-Gate Drain voltage

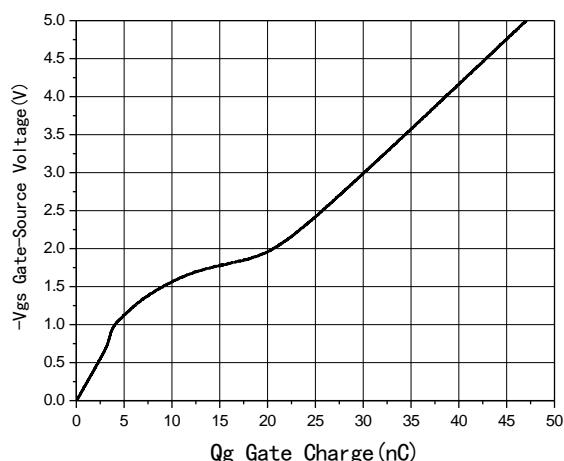


Fig6 Gate Charge

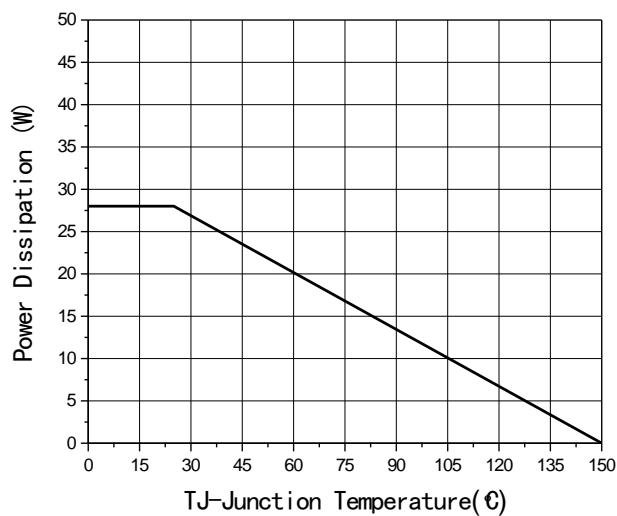


Fig7 Power De-rating


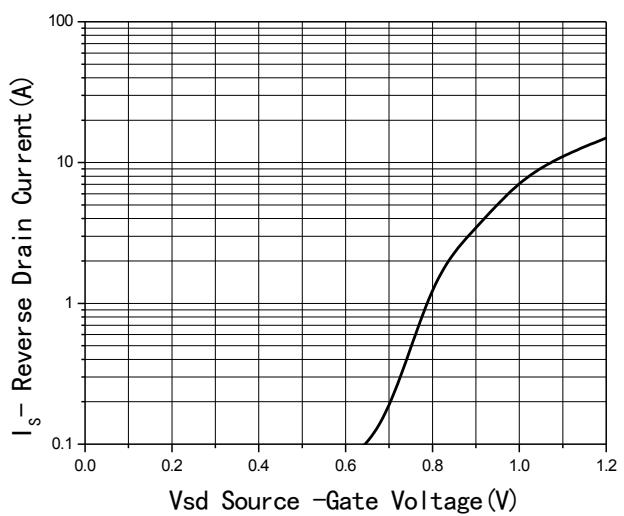


Fig8 Source-Drain Diode Forward

Package Information

- PDFN3.3*3.3-8L

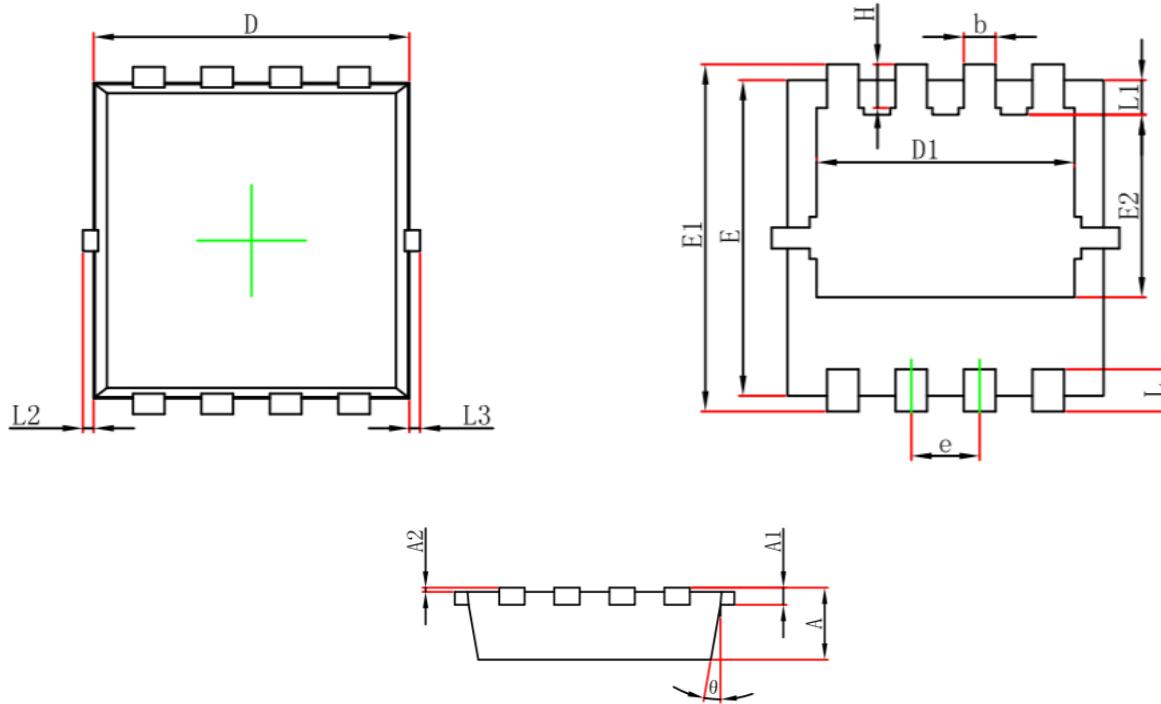

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.650	0.850	0.026	0.033
A1	0.152 REF.		0.006 REF.	
A2	0~0.05		0~0.002	
D	2.900	3.100	0.114	0.122
D1	2.300	2.600	0.091	0.102
E	2.900	3.100	0.114	0.122
E1	3.150	3.450	0.124	0.136
E2	1.535	1.935	0.060	0.076
b	0.200	0.400	0.008	0.016
e	0.550	0.750	0.022	0.030
L	0.300	0.500	0.012	0.020
L1	0.180	0.480	0.007	0.019
L2	0~0.100		0~0.004	
L3	0~0.100		0~0.004	
H	0.315	0.515	0.012	0.020
θ	9°	13°	9°	13°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by NATLINEAR manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T\)](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O\)](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#) [IPS60R1K0PFD7SAKMA1](#)
[IPS60R360PFD7SAKMA1](#) [IPS60R600PFD7SAKMA1](#)